

LMV422 Dual Rail-to-Rail Output Operational Amplifier with Power Select

Check for Samples: [LMV422](#)

FEATURES

- Supply Voltage 2.7V to 5.5V
- Supply Current per Channel
 - Low Power Mode 2 μ A
 - Full Power Mode 400 μ A
- Input Common Mode Voltage Range $-0.3V$ to $3.8V$
- CMRR 85 dB
- Output Voltage Swing Rail-to-Rail
- Input Offset Voltage 1 mV
- Bandwidth
 - Low Power Mode 27 kHz
 - Full Power Mode 8 MHz
- Stable for $A_V \geq +2$ or $A_V \leq -1$

APPLICATIONS

- AC Coupled Circuits
- Portable Instrumentation
- Smoke Detectors

DESCRIPTION

The LMV422 dual rail-to-rail output amplifier offers a power select pin (PS) that allows the user to select one of two power modes depending on the level of performance desired. This is ideal for AC coupled circuits where the circuit needs to be kept active to maintain a quiescent charge on the coupling capacitors with minimum power consumption.

For portable applications, the LMV422 operates in low power mode consuming only 2 μ A of supply current per channel at a bandwidth of 27 kHz. This allows the user to reduce the power consumption of an amplifier while maintaining an active circuit. For additional bandwidth and output current drive the amplifier can be switched to full power mode with 8 MHz bandwidth while consuming only 400 μ A per channel.

The LMV422 features a rail-to-rail output voltage swing in addition to an input common mode range that includes ground. The LMV422 is designed for closed loop gains of plus two (or minus one) or greater. The LMV422 is offered in a 10-Pin VSSOP miniature package to ease the adoption in applications where board area is at a premium.

Typical Application

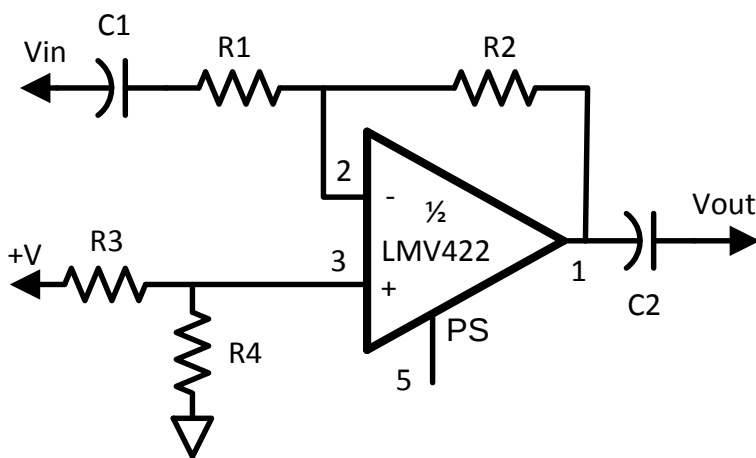


Figure 1. AC Coupled Application



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

ESD Tolerance ⁽²⁾	Human Body	2000V
	Machine Model	200V
V_{IN} Differential		$\pm 2V$
Supply Voltage ($V^+ - V^-$)		2.5V to 5.5V
Storage Temperature Range		-65°C to +150°C
Junction Temperature ⁽³⁾		+150°C
Soldering Information	Infrared or Convection (20 sec)	235°C
	Wave Soldering Lead Temp. (10 sec)	260°C

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.

(2) Human Body Model, 1.5 k Ω in series with 100 pF, Machine Model, 0 Ω in series with 200 pF.

(3) The maximum power dissipation is a function of $T_{J(MAX)}$, θ_{JA} , and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC board.

OPERATING RATINGS⁽¹⁾

Supply Voltage ($V^+ - V^-$)		2.7V to 5.5V
Temperature Range ⁽²⁾		-40°C to +85°C
Package Thermal Resistance (θ_{JA})	10-Pin VSSOP	210°C/W

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.

(2) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.

5V FULL POWER MODE ELECTRICAL CHARACTERISTICS

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 5V$, $V^- = 0V$, $V_{CM} = V_O = V^+/2$, $PS = V^-$. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min ⁽¹⁾	Typ ⁽²⁾	Max ⁽¹⁾	Units
V_{OS}	Input Offset Voltage			1	4 5.5	mV
ΔV_{OS}	Input Offset Voltage Difference	V_{OS} in Full Power Mode – V_{OS} in Low Power Mode		0.1	1	mV
$TC V_{OS}$	Input Offset Average Drift	See ⁽³⁾		2		$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current			5		pA
CMRR	Common Mode Rejection Ratio	V_{CM} Stepped from 0V to 3.5V	68 60	85		dB
PSRR	Power Supply Rejection Ratio	$V^+ = 2.7V$ to 5V	66 60	90		dB
CMVR	Input Common Mode Voltage Range	CMRR ≥ 50 dB	-0.3		3.8	V
A_{VOL}	Large Signal Voltage Gain	$V_O = 0.75V$ to 4.25V $R_L = 1\text{ M}\Omega$	72 70	100		dB
		$V_O = 0.75V$ to 4.25V $R_L = 10\text{ k}\Omega$	75 70	102		

(1) All limits are specified by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Offset voltage average drift is determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.

5V FULL POWER MODE ELECTRICAL CHARACTERISTICS (continued)

Unless otherwise specified, all limits specified for $T_j = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$, $\text{PS} = V^-$. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min ⁽¹⁾	Typ ⁽²⁾	Max ⁽¹⁾	Units
V_O	Output Swing High	$R_L = 10\text{ k}\Omega$ to $V^+/2$	4.93 4.88	4.97		V
		$R_L = 1\text{ M}\Omega$ to $V^+/2$	4.94 4.89	4.98		
	Output Swing Low	$R_L = 10\text{ k}\Omega$ to $V^+/2$		33	180 230	mV
		$R_L = 1\text{ M}\Omega$ to $V^+/2$		25	120 170	
I_{SC}	Output Short Circuit Current	Sourcing, $V_O = 0\text{V}$ $V_{\text{ID}} = 100\text{ mV}$	3	5		mA
		Sinking, $V_O = 5\text{V}$ $V_{\text{ID}} = -100\text{ mV}$	9	16		
I_S	Supply Current Per Channel	$\text{PS} \leq 0.5\text{V}$		400	650 900	μA
SR	Slew Rate ⁽⁴⁾	$V_O = 3\text{V}$, $A_V = +2$	1.8	3.8		$\text{V}/\mu\text{s}$
GBW	Gain Bandwidth Product			8		MHz
e_n	Input-Referred Voltage Noise	$f = 100\text{ kHz}$		20		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		25		
i_n	Input-Referred Current Noise	$f = 1\text{ kHz}$		0.006		$\text{pA}/\sqrt{\text{Hz}}$
t_{LF}	Time from Low Power Mode to Full Power Mode			210		ns
TH_{PS}	Full Power Mode Voltage Threshold				0.5	V
I_{PS}	Input Current PS pin ⁽⁵⁾			-2		μA

(4) Slew rate is the average of the rising and falling slew rates.

(5) Positive current corresponds to current flowing into the device.

5V LOW POWER MODE ELECTRICAL CHARACTERISTICS

Unless otherwise specified, all limits specified for $T_j = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$, $\text{PS} = V^+$ or Open. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min ⁽¹⁾	Typ ⁽²⁾	Max ⁽¹⁾	Units
V_{OS}	Input Offset Voltage			1	4 5.5	mV
ΔV_{OS}	Input Offset Voltage Difference	V_{OS} in Full Power Mode – V_{OS} in Low Power Mode		0.1	1	mV
TC V_{OS}	Input Offset Average Drift	See ⁽³⁾		2		$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current			5		pA
CMRR	Common Mode Rejection Ratio	V_{CM} Stepped from 0V to 3.5V	60 55	82		dB
PSRR	Power Supply Rejection Ratio	$V^+ = 2.7\text{V}$ to 5V	62 60	90		dB
CMVR	Input Common-Mode Voltage Range	$\text{CMRR} \geq 50\text{ dB}$	0		3.5	V
A_{VOL}	Large Signal Voltage Gain	$R_L = 1\text{ M}\Omega$ $V_O = 0.75$ to 4V	62 54	72		dB
V_O	Output Swing High	$R_L = 1\text{ M}\Omega$	4.94 4.89	4.98		V
	Output Swing Low	$R_L = 1\text{ M}\Omega$		150	200 250	mV

(1) All limits are specified by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Offset voltage average drift is determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.

5V LOW POWER MODE ELECTRICAL CHARACTERISTICS (continued)

Unless otherwise specified, all limits specified for $T_j = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$, $\text{PS} = V^+$ or Open. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min ⁽¹⁾	Typ ⁽²⁾	Max ⁽¹⁾	Units
I_{SC}	Output Short Circuit Current	Sourcing, $V_O = 0\text{V}$ $V_{\text{ID}} = 200\text{ mV}$	40	140		μA
		Sinking, $V_O = 5\text{V}$ $V_{\text{ID}} = -200\text{ mV}$	25	130		
I_{S}	Supply Current per channel	$\text{PS} \geq 4.5\text{V}$		2	3.5 4.5	μA
SR	Slew Rate ⁽⁴⁾	$V_O = 3\text{V}$, $A_V = +2$	8	14		V/ms
GBW	Gain Bandwidth Product			27		kHz
e_n	Input-Referred Voltage Noise	$f = 100\text{ kHz}$		40		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		60		
i_n	Input-Referred Current Noise	$f = 1\text{ kHz}$		0.06		$\text{pA}/\sqrt{\text{Hz}}$
t_{FL}	Time from Full Power Mode to Low Power Mode			500		ns
TH_{PS}	Low Power Mode Voltage Threshold		4.5			V
I_{PS}	Input Current PS pin ⁽⁵⁾			8		nA

(4) Slew rate is the average of the rising and falling slew rates.

(5) Positive current corresponds to current flowing into the device.

CONNECTION DIAGRAM


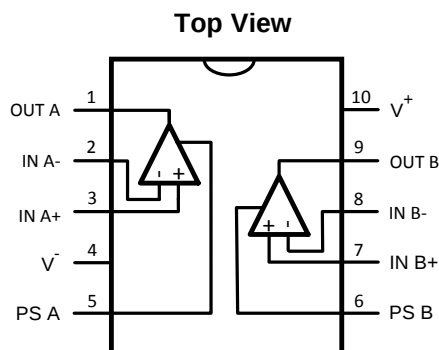


Figure 2. 10-Pin VSSOP Package
See Package Number DGS0010A

Simplified Schematic

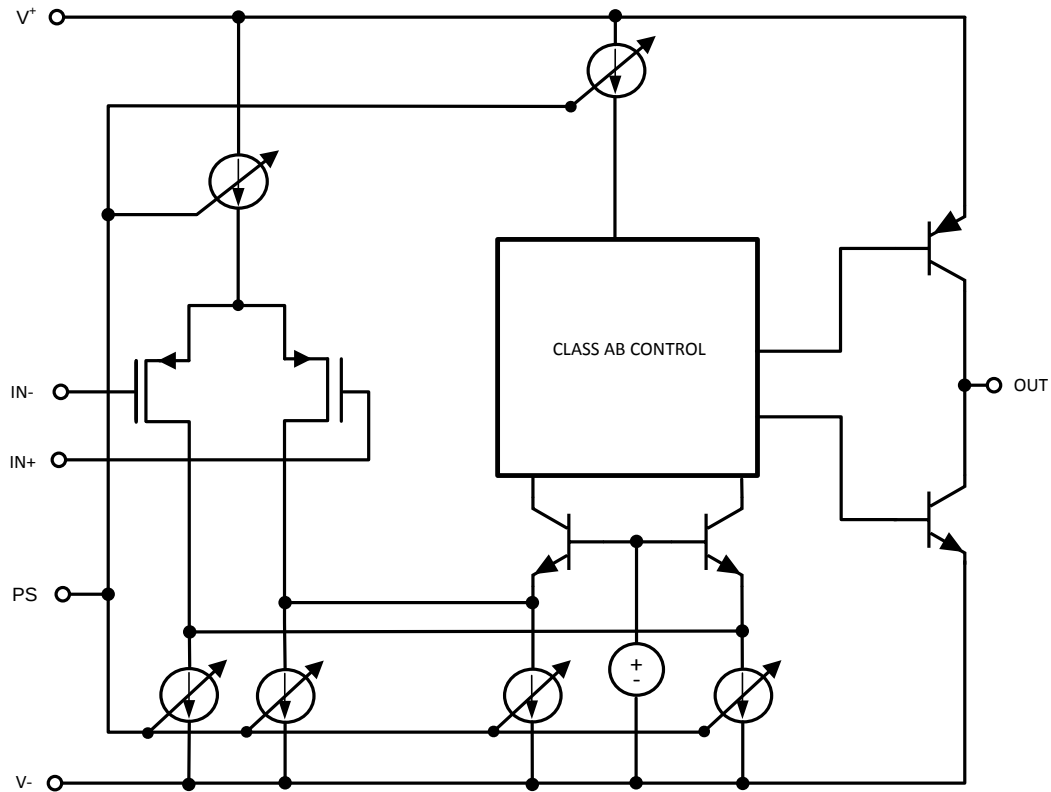

TYPICAL PERFORMANCE CHARACTERISTICS

Unless otherwise specified, $V^+ = 5V$, $T_A = 25^\circ\text{C}$, $PS = V^+$ for Full Power Mode, $PS = V^-$ for Low Power Mode.

**Supply Current vs. Supply Voltage per Channel
(Full Power Mode)**

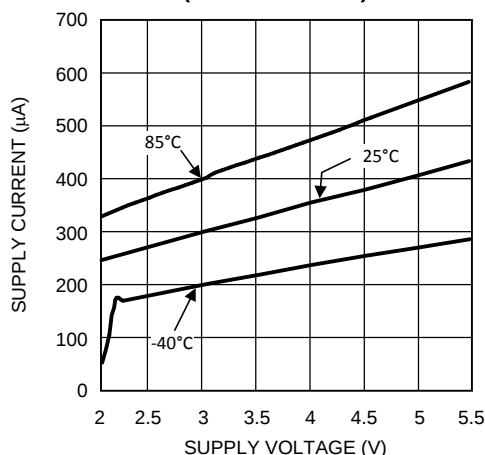


Figure 3.

**Supply Current vs. Supply Voltage per Channel
(Low Power Mode)**

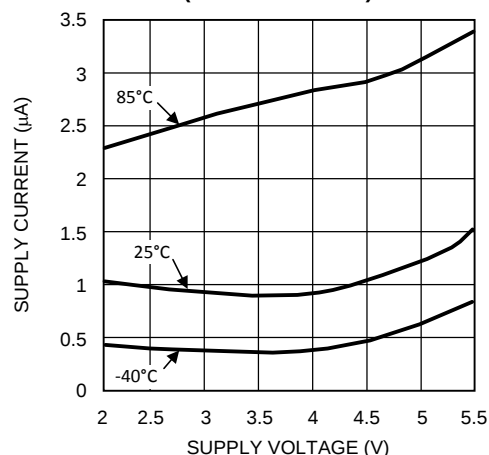


Figure 4.

Gain and Phase vs. Frequency

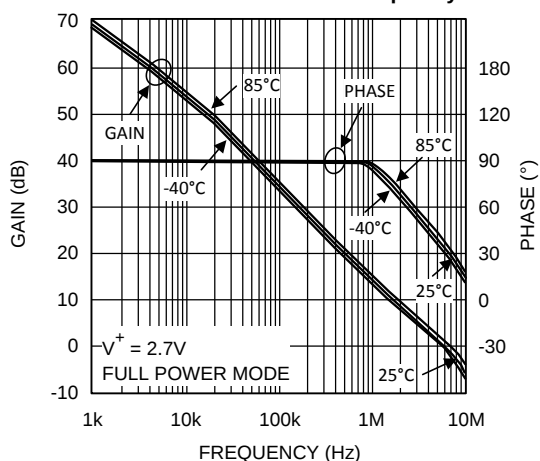


Figure 5.

Gain and Phase vs. Frequency

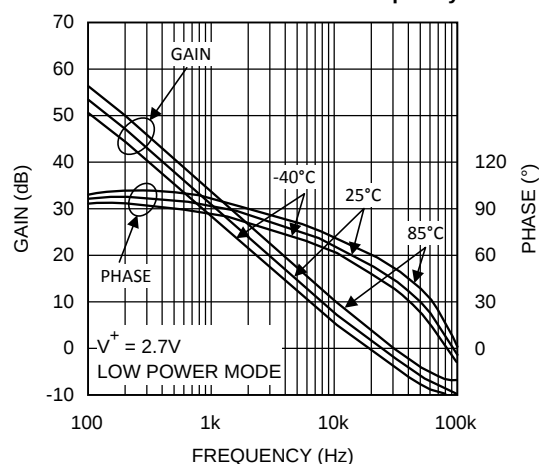


Figure 6.

Gain and Phase vs. Frequency

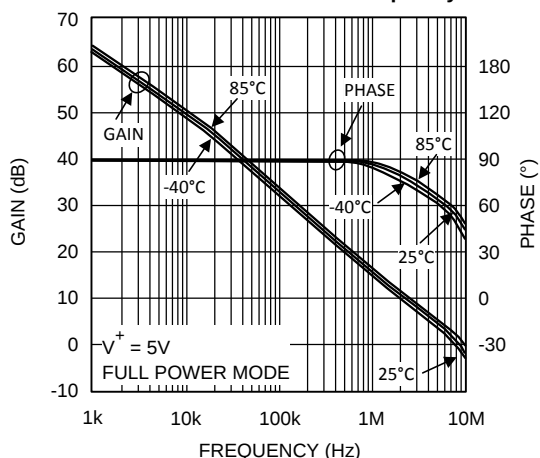


Figure 7.

Gain and Phase vs. Frequency

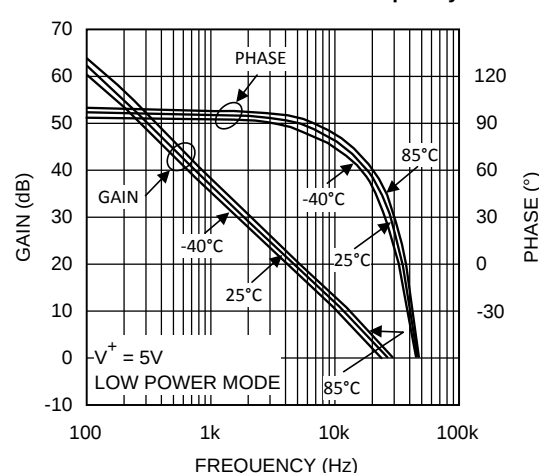


Figure 8.

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Unless otherwise specified, $V^+ = 5V$, $T_A = 25^\circ C$, $PS = V^+$ for Full Power Mode, $PS = V^-$ for Low Power Mode.

Phase Margin vs. Gain for Various Capacitive Load

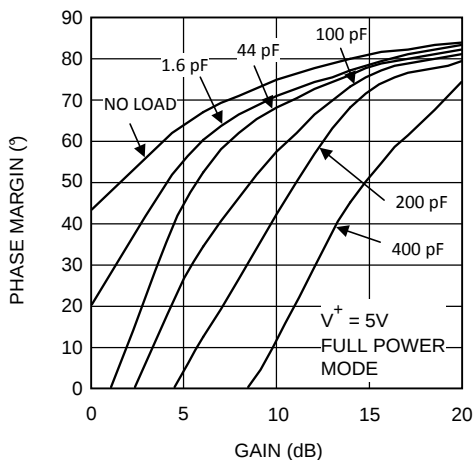


Figure 9.

Phase Margin vs. Gain for Various Capacitive Load

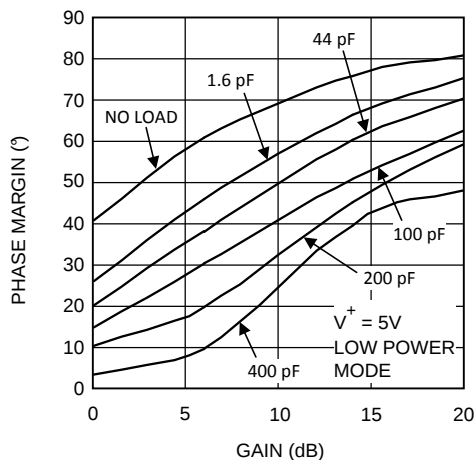


Figure 10.

Input Offset Voltage vs. Output Voltage

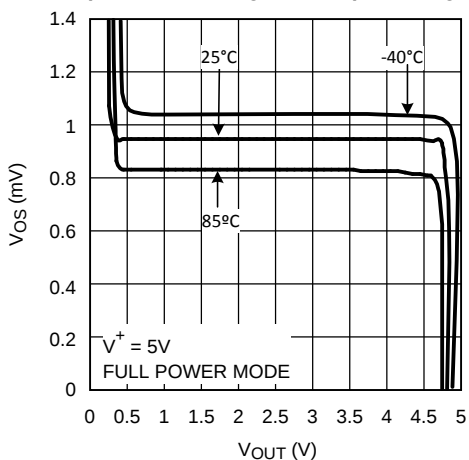


Figure 11.

Input Offset Voltage vs. Output Voltage

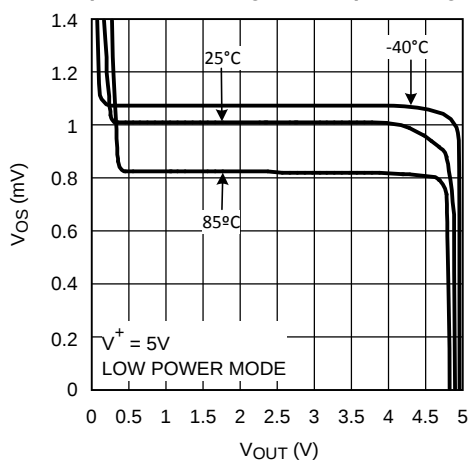


Figure 12.

Noise vs. Frequency

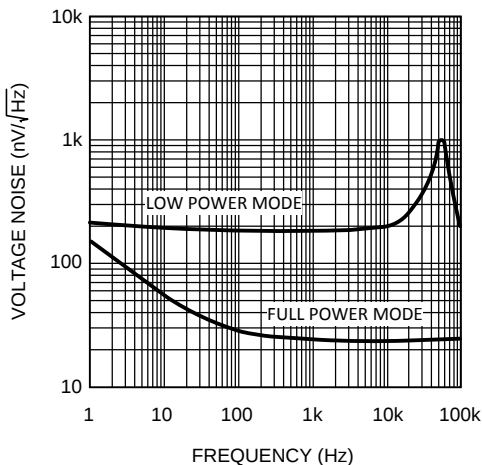


Figure 13.

PSRR vs. Frequency

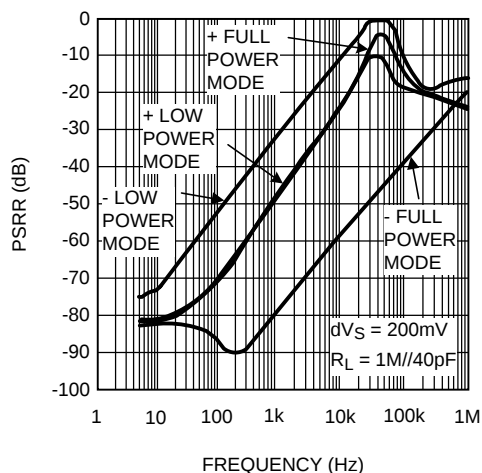


Figure 14.

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Unless otherwise specified, $V^+ = 5V$, $T_A = 25^\circ C$, $PS = V^+$ for Full Power Mode, $PS = V^-$ for Low Power Mode.

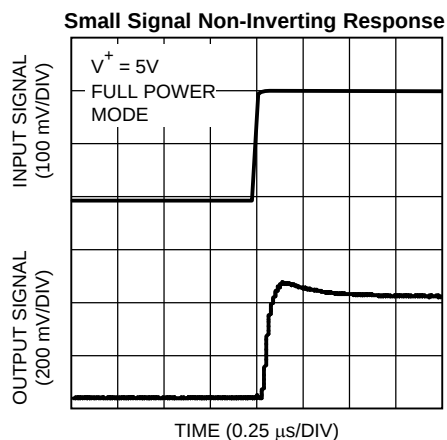


Figure 15.

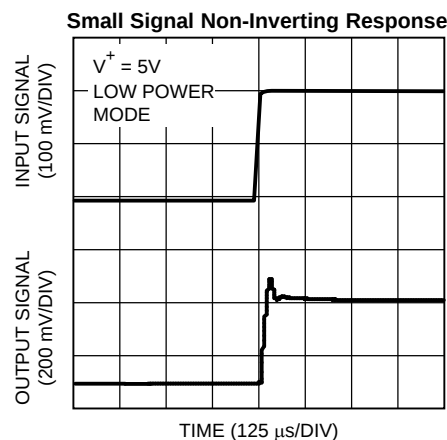


Figure 16.

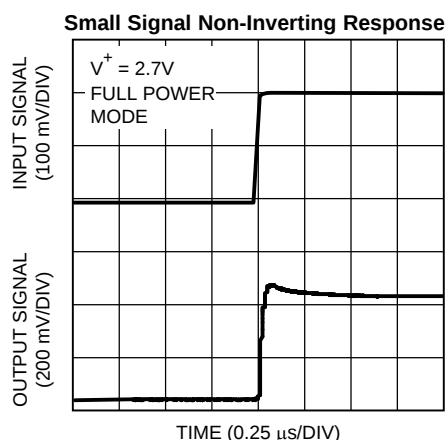


Figure 17.

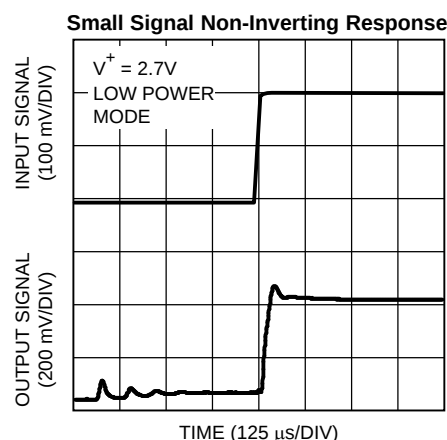


Figure 18.

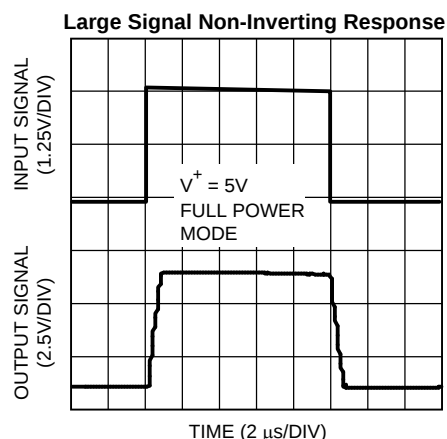


Figure 19.

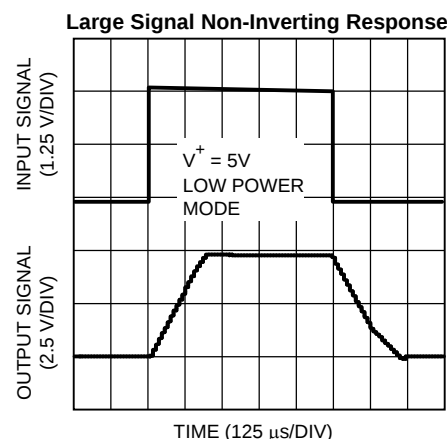


Figure 20.

APPLICATION INFORMATION

The LMV422 is a dual rail-to-rail output amplifier that can be switched between two active power modes. The power select pin (PS) provides a method to optimize the power consumption, bandwidth and short circuit current. When the PS pin is set to greater than 4.5V (Figure 21) or left open, the LMV422 is in Low Power Mode operating at a bandwidth of 27 kHz and is consuming only 2 μ A of supply current per channel. Setting the PS pin to less than 0.5V, switches the LMV422 to Full Power Mode with a bandwidth of 8 MHz and supply current of 400 μ A per channel (Figure 23b). The PS pin should not exceed the supply voltage. The active power modes of the two amplifiers can be set independently.




Figure 21. Low Power Mode




Figure 22. Full Power Mode

The LMV422 PS pin has an internal pull up and a logic level control gate that makes it easy for the PS pin to be controlled by the output of a logic gate or the output pin of a microcontroller. The following figures show the three typical output configurations for logic gates and microcontrollers.

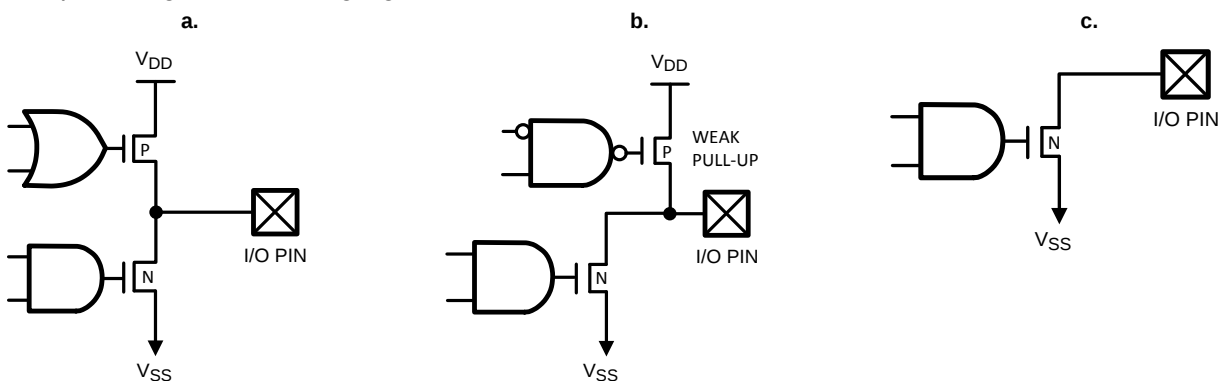


Figure 23. Typical Output Configurations for Logic Gates and Microcontrollers

CAPACITIVE LOAD TOLERANCE

The LMV422 is optimized for maximum bandwidth when operating at a minimum closed loop gain of +2 or -1; therefore, it is not recommended that it be configured as a buffer. Like many other op amps, the LMV422 may oscillate when the applied load appears capacitive. The threshold of the oscillation varies both with load and circuit gain. (See [Phase Margin vs. Gain](#) for Various Capacitive Loads.) The load capacitance interacts with the amplifier's output resistance to create an additional pole. If this pole frequency is too low, it will degrade the amplifier's phase margin so that the amplifier is no longer stable.

Figure 24a and Figure 24b show the addition of a small value resistor R_{ISO} or R_X (50 Ω to 100 Ω) in series with the op amp's output. Figure 24b shows the addition of a capacitor C_F (5 pF to 10 pF) between the inverting input and the output pin. This additional capacitor returns the phase margin to a safe value without interfering with lower frequency circuit operation. Note that in all cases, the output will ring heavily when the load capacitance is near the threshold for oscillation.

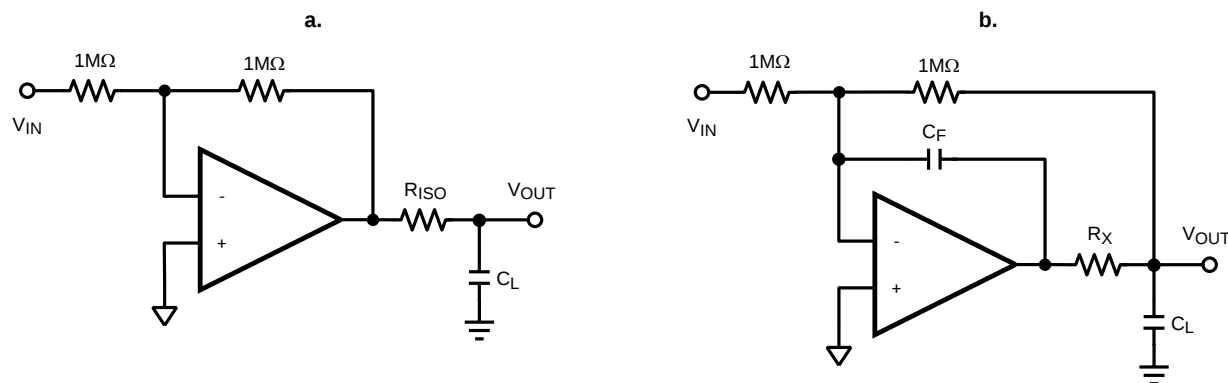


Figure 24. Capacitive Load Tolerance

AC COUPLED CIRCUITS

The two power modes makes the LMV422 ideal for AC coupled circuits where the circuit needs to be kept active to maintain a quiescent charge on the coupling capacitors with minimum power consumption.

Figure 25 shows a schematic of an inverting and non-inverting AC coupled amplifiers using the LMV422 with the PS pins controlled by I/O ports of a microcontroller.

The advantage of the low power active mode for AC coupled amplifiers is the elimination of the time needed to re-establish a quiescent operating point when the amplifier is switched to a full power mode. When amplifiers without a low power active mode are used in low power applications, there are two ways to minimize power consumption. The first is turning off the amplifiers by switching off power to the op amps using a transistor switch. The second is using an amplifier with a shut down pin. Both of these methods have the problem of allowing the coupling capacitors, C1, C2, C3, C4, and C5, to discharge the quiescent DC voltage stored on them when the amplifiers are placed in the shut down state. When the amplifiers are turned on again, the quiescent DC voltages must reestablish themselves. During this time, the amplifier's output is not usable because the output signal is a mixture of the amplified input signal and the charging voltage on the coupling capacitors. The settling time can range from several milliseconds to several seconds depending on the resistor and capacitor values.

When the LMV422 is placed into the low power mode the power consumption is minimal but the amplifier is active to maintain the quiescent DC voltage on the coupling capacitors. The transition back to the operational high power mode is fast, within a few hundred nanoseconds. The active low power mode of the LMV422 satisfies the two critical aspects of a low power AC amplifier design. The values of the gain resistors, bias resistors, and coupling capacitors can be chosen independently of the turn on and stabilization time.

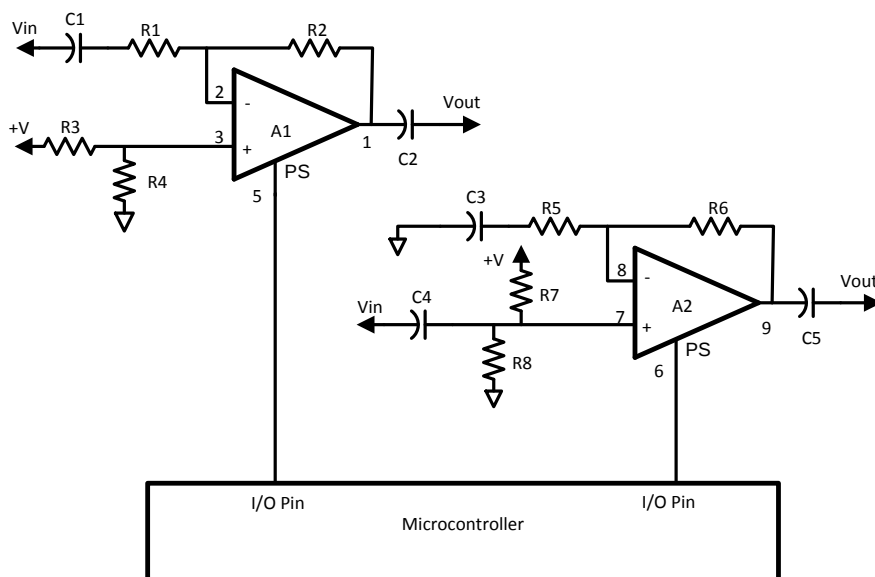


Figure 25. Inverting and Non-Inverting AC Coupled Amplifiers Using the LMV422

RESISTIVE LOAD

The LMV422 has a minimum current drive of 3 mA in full power mode. The minimum resistive load should be 10 kΩ

The current drive in the low power mode is 140 uA, the minimum resistive load should be 100 kΩ.

REVISION HISTORY

Changes from Revision C (April 2013) to Revision D

Page

- Changed layout of National Data Sheet to TI format [11](#)

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com