




MULTILAYER CERAMIC CHIP CAPACITORS

C Series, CKC Series Commercial Grade Soft Termination

Type:

C1608 [EIA CC0603]
C2012 [EIA CC0805]
C3216 [EIA CC1206]
C3225 [EIA CC1210]
C4520 [EIA CC1808]
C4532 [EIA CC1812]
C5750 [EIA CC2220]
C7563 [EIA CC3025]
CKCN27 [EIA CC0302]
CKCM25 [EIA CC0504]
CKCL22 [EIA CC0805]

Issue date:
Oct 2013

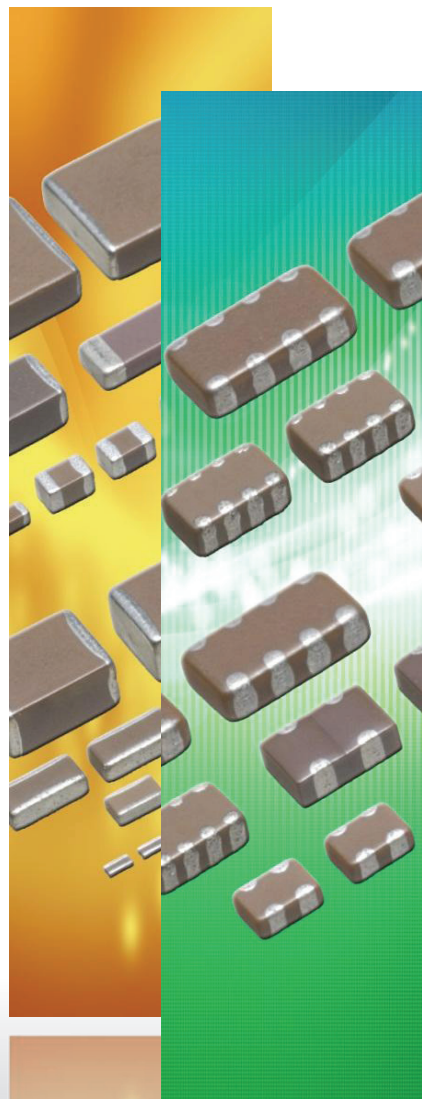

REMINDERS

Please read before using this product

SAFETY REMINDERS




REMINDERS

1. If you intend to use a product listed in this catalog for a purpose that may cause loss of life or other damage, you must contact our company's sales window.
2. We may modify products or discontinue production of a product listed in this catalog without prior notification.
3. We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
4. If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
5. Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
6. We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
7. This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice: Effective January 2013, TDK will use a new catalog number which adds product thickness and packaging specification detail. This new catalog number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders. Please be aware the last five digits of the catalog number will differ from the item description (internal control number) on the product label. Contact your local TDK Sales representative for more information.

(Example)

Catalog Issued date	Catalog Number	Item Description (On Delivery Label)
Prior to January 2013	C1608C0G1E103J	C1608C0G1E103JT000N
January 2013 and Later	C1608C0G1E103J080AA	C1608C0G1E103JT000N

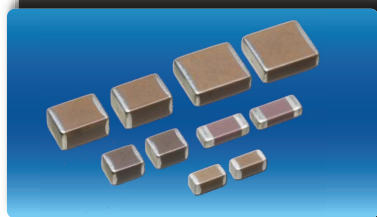

C Series Soft Termination

Type: C1608 [EIA CC0603], C2012 [EIA CC0805], C3216 [EIA CC1206], C3225 [EIA CC1210], C4520 [EIA CC1808], C4532 [EIA CC1812], C5750 [EIA CC2220], C7563 [EIA CC3025]




Features




- Improved board bending resistance, drop impact resistance, thermal shock resistance, and heat cycle properties.
- Conductive resin absorb external stress to protect solder joint parts and capacitor body.
- Compliance with the RoHS Directive.

Standard Product



Soft Termination




Applications



- Switching power supply
- Telecom base station
- Electronic circuits mounted on alumina substrate
- SMT application which requires bending robustness in which solder joint reliability is problematic

Shape & Dimensions



L	Body Length
W	Body Width
T	Body Height
B	Terminal Width
G	Terminal Spacing



Catalog Number Construction

C • 7563 • X7S • 1C • 107 • M • 280 • L • E

Series Name

Dimensions L x W (mm)

Code	Length	Width	Terminal
C1608	1.60 + 0.20/-0.10	0.80 + 0.15/-0.10	0.20 min.
C2012	2.00 + 0.25/-0.20	1.25 + 0.25/-0.20	0.20 min.
C3216	3.20 + 0.40/-0.20	1.60 + 0.30/-0.20	0.20 min.
C3225	3.20 + 0.50/-0.40	2.50 ± 0.30	0.20 min.
C4520	4.50 + 0.30/-0.20	2.00 ± 0.15	0.20 min.
C4532	4.50 + 0.50/-0.40	3.20 ± 0.40	0.20 min.
C5750	5.70 + 0.50/-0.40	5.00 ± 0.40	0.20 min.
C7563	7.50 ± 0.50	6.30 ± 0.50	0.30 min.

*Dimension tolerance are typical values

Temperature Characteristics

Temperature Characteristics	Capacitance Change	Temperature Range
C0G	0 ±30ppm/°C	-55 to +125°C
X7R	±15%	-55 to +125°C
X7S	±22%	-55 to +125°C
X7T	+22/-33%	-55 to +125°C

Rated Voltage (DC)

Code	Voltage (DC)
1C	16V
1E	25V
1V	35V
1H	50V
2A	100V
2E	250V
2W	450V
2J	630V
3A	1000V
3D	2000V
3F	3000V

Nominal Capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point. Ex. 0R2 = 0.2pF; 103 = 10,000pF; 105 = 1,000,000pF = 1,000nF

Capacitance Tolerance

Code	Tolerance
K	± 10%
M	± 20%

Nominal Thickness

Code	Thickness
080	0.80 mm
085	0.85 mm
115	1.15 mm
125	1.25 mm
130	1.30 mm
160	1.60 mm
200	2.00 mm
230	2.30 mm
250	2.50 mm
280	2.80 mm

Packaging Style

Code	Style
A	178" Reel, 4mm Pitch
K	178" Reel, 8mm Pitch
L	330" Reel, 12mm Pitch

Special Reserved Code

Code	Description
E	Soft Termination



Capacitance Range Chart

EIA CC0603 [C1608]

Capacitance Range Chart

Temperature Characteristics: X7R (±15%)
Rated Voltage: 50V (1H)

Capacitance (pF)	Code	Tolerance	X7R 1H (50V)
1,000	102	K: ± 10%	
10,000	103	M: ± 20%	
100,000	104		

Standard Thickness
0.80 mm



Capacitance Range Chart

EIA CC0805 [C2012]

Capacitance Range Chart

Temperature Characteristics: X7R (±15%), X7S (±22%), X7T (+22/-33%)
Rated Voltage: 450V (2W), 250V (2E), 100V (2A), 50V (1H), 35V (1V), 25V (1E), 16V (1C)

Capacitance (pF)	Code	Tolerance	X7R						X7S	X7T	
			2E (250V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	1C (16V)	2A (100V)	2W (450V)	2E (250V)
10,000	103	K: ± 10%									
22,000	223	M: ± 20%									
47,000	473										
100,000	104										
220,000	224										
470,000	474										
1,000,000	105										
2,200,000	225										
4,700,000	475										

Standard Thickness
0.85 mm
1.25 mm



Capacitance Range Chart

EIA CC1206 [C3216]

Capacitance Range Chart

Temperature Characteristics: X7R (±15%), X7S (±22%), X7T (+22/-33%)
Rated Voltage: 2000V (3D), 1000V (3A), 630V (2J), 450V (2W), 250V (2E), 100V (2A), 50V (1H), 35V (1V), 25V (1E)

Capacitance (pF)	Code	Tolerance	X7R						X7S			X7T		
			2J (630V)	2E (250V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	3D (2000V)	3A (1000V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
470	471	K: ± 10%												
1,000	102	M: ± 20%												
10,000	103													
22,000	223													
47,000	473													
100,000	104													
220,000	224													
470,000	474													
1,000,000	105													
2,200,000	225													
4,700,000	475													
10,000,000	106													

Standard Thickness 0.85 mm 1.15 mm 1.30 mm 1.60 mm

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



Capacitance Range Chart

EIA CC1210[C3225]

Capacitance Range Chart

Temperature Characteristics: X7R ($\pm 15\%$), X7S ($\pm 22\%$), X7T ($+22/-33\%$)
 Rated Voltage: 630V (2J), 450V (2W), 250V (2E), 100V (2A), 50V (1H)

Capacitance (pF)	Code	Tolerance	X7R			X7S		X7T	
			2J (630V)	2E (250V)	2A (100V)	2A (100V)	1H (50V)	2J (630V)	2W (450V)
47,000	473	K: $\pm 10\%$ M: $\pm 20\%$							
100,000	104								
220,000	224								
2,200,000	225								
4,700,000	475								
10,000,000	106								

Standard Thickness

	1.60 mm
	2.00 mm
	2.30 mm
	2.50 mm



Capacitance Range Chart

EIA CC1808 [C4520]

Capacitance Range Chart

Temperature Characteristics : X7R ($\pm 15\%$)
 Rated Voltage: 2000V (3D)

Capacitance (pF)	Code	Tolerance	X7R
			3D (2000V)
1,000	102	K: $\pm 10\%$ M: $\pm 20\%$	

Standard Thickness

	1.30 mm
--	---------



Capacitance Range Chart

EIA CC1812 [C4532]

Capacitance Range Chart

Temperature Characteristics : C0G ($0 \pm 30\text{ppm}/^\circ\text{C}$), X7R ($\pm 15\%$), X7S ($\pm 22\%$), X7T ($+22/-33\%$)
 Rated Voltage: 3000V (3F), 2000V (3D), 1000V (3A), 630V (2J), 450V (2W), 250V (2E)

Capacitance (pF)	Code	Tolerance	C0G	X7R		X7S	X7T		
			3F (3000V)	3D (2000V)	2E (250V)	3A (1000V)	2J (630V)	2W (450V)	2E (250V)
		K: $\pm 10\%$ M: $\pm 20\%$							

Standard Thickness

	1.30 mm
	1.60 mm
	2.00 mm
	2.30 mm
	2.50 mm

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



Capacitance Range Chart

EIA CC2220 [C5750]

Capacitance Range Chart

Temperature Characteristics : X7R ($\pm 15\%$), X7S ($\pm 22\%$), X7T ($+22/-33\%$)
 Rated Voltage: 2000V (3D), 630V (2J), 450V (2W), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	X7R	X7S		X7T		
			2E (250V)	3D (2000V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
10,000	103	K: $\pm 10\%$ M: $\pm 20\%$						
470,000	474							
1,000,000	105							
2,200,000	225							
10,000,000	106							

Standard Thickness



Capacitance Range Chart


EIA CC3025 [C7563]

Capacitance Range Chart

Temperature Characteristics : X7S ($\pm 22\%$)
 Rated Voltage: 50V (1H), 16V (1C)

Capacitance (pF)	Code	Tolerance	X7S	
			1H (50V)	1C (16V)
22,000,000	226	M: $\pm 20\%$		
100,000,000	107			

Standard Thickness



TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to +125°C, 0 ± 30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number
330 pF	4532	2.50 ± 0.20	± 10%	C4532C0G3F331K250KE

Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number				
				Rated Voltage Edc: 2000V	Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V	Rated Voltage Edc: 50V
1 nF	1608	0.80 +0.15/-0.1	± 10%					C1608X7R1H102K080AE
			± 20%					C1608X7R1H102M080AE
	4520	1.30 ± 0.15	± 10%	C4520X7R3D102K130KE				
			± 20%	C4520X7R3D102M130KE				
2.2 nF	4532	1.30 ± 0.15	± 10%	C4532X7R3D222K130KE				
			± 20%	C4532X7R3D222M130KE				
10 nF	1608	0.80 +0.15/-0.1	± 10%					C1608X7R1H103K080AE
			± 20%					C1608X7R1H103M080AE
	2012	1.25 +0.25/-0.20	± 10%			C2012X7R2E103K125AE		
			± 20%			C2012X7R2E103M125AE		
	3216	1.15 ± 0.15	± 10%		C3216X7R2J103K115AE			
			± 20%		C3216X7R2J103M115AE			
	2012	1.25 +0.25/-0.20	± 10%			C2012X7R2E223K125AE		
			± 20%			C2012X7R2E223M125AE		
22 nF	3216	1.30 ± 0.20	± 10%		C3216X7R2J223K130AE			
			± 20%		C3216X7R2J223M130AE			
	47 nF	2.00 +0.30/-0.20	± 10%		C3225X7R2J473K200AE			
			± 20%		C3225X7R2J473M200AE			
100 nF	1608	0.80 +0.15/-0.1	± 10%					C1608X7R1H104K080AE
			± 20%					C1608X7R1H104M080AE
	2012	1.25 +0.25/-0.20	± 10%			C2012X7R2A104K125AE		C2012X7R1H104K125AE
			± 20%			C2012X7R2A104M125AE		C2012X7R1H104M125AE
	3216	1.60 +0.30/-0.20	± 10%		C3216X7R2E104K160AE	C3216X7R2A104K160AE		
			± 20%		C3216X7R2E104M160AE	C3216X7R2A104M160AE		
220 nF	3225	2.00 +0.30/-0.20	± 10%		C3225X7R2E104K200AE			
			± 20%		C3225X7R2E104M200AE			
	470 nF	2.00 +0.30/-0.20	± 10%		C3225X7R2E224K200AE			
			± 20%		C3225X7R2E224M200AE			
470 nF	2012	1.25 +0.25/-0.20	± 10%					C2012X7R1H474K125AE
			± 20%					C2012X7R1H474M125AE
	3216	1.60 +0.30/-0.20	± 10%			C3216X7R2A474K160AE		
			± 20%			C3216X7R2A474M160AE		
	4532	2.30 +0.30/-0.20	± 10%		C4532X7R2E474K230KE			
			± 20%		C4532X7R2E474M230KE			
1 µF	2012	1.25 +0.25/-0.20	± 10%					C2012X7R1H105K125AE
			± 20%					C2012X7R1H105M125AE
	3216	1.60 +0.30/-0.20	± 10%			C3216X7R2A105K160AE		C3216X7R1H105K160AE
			± 20%			C3216X7R2A105M160AE		C3216X7R1H105M160AE
	5750	2.30 +0.30/-0.20	± 10%		C5750X7R2E105K230KE			
			± 20%		C5750X7R2E105M230KE			
2.2 µF	3216	1.60 +0.30/-0.20	± 10%					C3216X7R1H225K160AE
			± 20%					C3216X7R1H225M160AE
	3225	2.30 +0.30/-0.20	± 10%			C3225X7R2A225K230AE		
			± 20%			C3225X7R2A225M230AE		

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number		
				Rated Voltage Edc: 35V	Rated Voltage Edc: 25V	Rated Voltage Edc: 16V
2.2 µF	2012	1.25 +0.25/-0.20	± 10%	C2012X7R1V225K125AE		
			± 20%	C2012X7R1V225M125AE		
4.7 µF	2012	1.25 +0.25/-0.20	± 10%		C2012X7R1E475K125AE	C2012X7R1C475K125AE
			± 20%		C2012X7R1E475M125AE	C2012X7R1C475M125AE
	3216	1.60 +0.30/-0.20	± 10%	C3216X7R1V475K160AE		
			± 20%	C3216X7R1V475M160AE		
10 µF	3216	1.60 +0.30/-0.20	± 10%		C3216X7R1E106K160AE	
			± 20%		C3216X7R1E106M160AE	

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X7S (-55 to +125°C, ±22%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number				
				Rated Voltage Edc: 2000V	Rated Voltage Edc: 1000V	Rated Voltage Edc: 100V	Rated Voltage Edc: 50V	Rated Voltage Edc: 16V
470 pF	3216	1.30 ± 0.20	± 10%	C3216X7S3D471K130AE				
			± 20%	C3216X7S3D471M130AE				
1 nF	3216	0.85 ± 0.15	± 10%		C3216X7S3A102K085AE			
			± 20%		C3216X7S3A102M085AE			
10 nF	4532	1.60 +0.30/-0.20	± 10%		C4532X7S3A103K160KE			
			± 20%		C4532X7S3A103M160KE			
	5750	2.50 ± 0.30	± 10%	C5750X7S3D103K250KE				
			± 20%	C5750X7S3D103M250KE				
220 nF	2012	0.85 ± 0.15	± 10%			C2012X7S2A224K085AE		
			± 20%			C2012X7S2A224M085AE		
470 nF	2012	1.25 +0.25/-0.20	± 10%			C2012X7S2A474K125AE		
			± 20%			C2012X7S2A474M125AE		
1 µF	2012	1.25 +0.25/-0.20	± 10%			C2012X7S2A105K125AE		
			± 20%			C2012X7S2A105M125AE		
2.2 µF	3216	1.60 +0.30/-0.20	± 10%			C3216X7S2A225K160AE		
			± 20%			C3216X7S2A225M160AE		
4.7 µF	3225	2.00 +0.30/-0.20	± 10%			C3225X7S2A475K200AE		
			± 20%			C3225X7S2A475M200AE		
	3225	2.30 +0.30/-0.20	± 10%				C3225X7S1H475K230AE	
			± 20%				C3225X7S1H475M230AE	
10 µF	3225	2.50 ± 0.30	± 10%				C3225X7S1H106K250AE	
			± 20%				C3225X7S1H106M250AE	
	5750	2.30 +0.30/-0.20	± 10%		C5750X7S2A106K230KE			
			± 20%		C5750X7S2A106M230KE			
22 µF	7563	2.30 (2.50max)	± 20%				C7563X7S1H226M230LE	
100 µF	7563	2.80 (3.00max)	± 20%					C7563X7S1C107M280LE

Class 2 (Temperature Stable)

Temperature Characteristics: X7T (-55 to +125°C, +22/-33%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number		
				Rated Voltage Edc: 100V	Rated Voltage Edc: 50V	Rated Voltage Edc: 25V
10 nF	2012	0.85 ± 0.15	± 10%		C2012X7T2W103K085AE	
			± 20%		C2012X7T2W103M085AE	
22 nF	2012	1.25 +0.25/-0.20	± 10%		C2012X7T2W223K125AE	
			± 20%		C2012X7T2W223M125AE	
47 nF	2012	1.25 +0.25/-0.20	± 10%		C2012X7T2W473K125AE	C2012X7T2E473K125AE
			± 20%		C2012X7T2W473M125AE	C2012X7T2E473M125AE
	3216	1.60 +0.30/-0.20	± 10%	C3216X7T2J473K160AE		
			± 20%	C3216X7T2J473M160AE		
100 nF	2012	1.25 +0.25/-0.20	± 10%			C2012X7T2E104K125AE
			± 20%			C2012X7T2E104M125AE
	3216	1.60 +0.30/-0.20	± 10%		C3216X7T2W104K160AE	
			± 20%		C3216X7T2W104M160AE	
220 nF	3225	1.60 +0.30/-0.20	± 10%	C3225X7T2J104K160AE		
			± 20%	C3225X7T2J104M160AE		
	3216	1.60 +0.30/-0.20	± 10%			C3216X7T2E224K160AE
			± 20%			C3216X7T2E224M160AE
470 nF	4532	2.30 +0.30/-0.20	± 10%		C4532X7T2W224K200AE	
			± 20%		C4532X7T2W224M200AE	
	4532	2.30 +0.30/-0.20	± 10%	C4532X7T2J224K200KE		
			± 20%	C4532X7T2J224M200KE		
1 µF	5750	2.50 ± 0.30	± 10%	C5750X7T2J474K250KE		
			± 20%	C5750X7T2J474M250KE		
	4532	2.50 ± 0.30	± 10%			C4532X7T2E105K250KE
			± 20%			C4532X7T2E105M250KE
2.2 µF	5750	2.50 ± 0.30	± 10%		C5750X7T2W105K250KE	
			± 20%		C5750X7T2W105M250KE	
2.2 µF	5750	2.50 ± 0.30	± 10%			C5750X7T2E225K250KE
			± 20%			C5750X7T2E225M250KE

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



CKC Series

2in1 Soft Termination Array


Type: CKCN27 [EIA CC0302], CKCM25 [EIA CC0504], CKCL22 [EIA CC0805]

Features




- Improved board bending resistance, drop impact resistance, thermal shock resistance, and heat cycle properties.
- Conductive resin absorb external stress to protect solder joint parts and capacitor body.
- Compliance with the RoHS Directive.

Standard Product



Soft Termination




Applications



- Switching power supply
- Telecom base station
- Electronic circuits mounted on alumina substrate
- SMT application which requires bending robustness in which solder joint reliability is problematic

Shape & Dimensions



L	Body Length
W	Body Width
T	Body Height
C	Terminal Width
P	Terminal Spacing



Catalog Number Construction

CKC • L22 • X5R • 0J • 225 • M • 085 • A • K

Series Name

Dimensions L x W (mm)

Code	Length	Width
N27	0.90 ± 0.05	0.60 ± 0.05
M25	1.37 ± 0.15	1.00 ± 0.15
L22	2.00 ± 0.15	1.25 ± 0.15

Temperature Characteristics

Temperature Characteristics	Capacitance Change	Temperature Range
C0G	0±30 ppm/°C	-55 to +125°C
JB	±10%	-25 to +85°C
X5R	±15%	-55 to +85°C
X7R	±15%	-55 to +125°C
X8R	±15%	-55 to +150°C

Rated Voltage (DC)

Code	Voltage (DC)
0J	6.3V
1A	10V
1C	16V
1E	25V
1H	50V
2A	100V

Nominal Capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

Ex. 0R2 = 0.2pF; 103 = 10,000pF; 105 = 1,000,000pF = 100nF = 1μF

Capacitance Tolerance

Code	Tolerance
F	± 1pF
K	± 10%
M	± 20%

Nominal Thickness

Code	Thickness
045	0.45 mm
060	0.60 mm
080	0.80 mm
085	0.85 mm

Packaging Style

Code	Style
A	178" Reel, 4mm Pitch
B	178" Reel, 2mm Pitch

Special Reserved Code

Code	Description
K	Soft Termination



Capacitance Range Chart

CKCN27(C0906)[EIA CC0302]

Capacitance Range Chart

Temperature Characteristics: JB ($\pm 10\%$), X5R ($\pm 15\%$)

Rated Voltage: 6.3V (0J)

Capacitance (pF)	Code	Tolerance	JB	X5R
			0J (6.3V)	0J (6.3V)
100,000	104	M: $\pm 20\%$		

Standard Thickness

0.45 mm



Capacitance Range Chart

CKCM25(C1310)[EIA CC0504]

Capacitance Range Chart

Temperature Characteristics: C0G ($0 \pm 30\text{ppm}/^\circ\text{C}$), X5R ($\pm 15\%$), X7R ($\pm 15\%$), X8R ($\pm 15\%$)

Rated Voltage: 100V (2A), 50V (1H), 25V (1E), 16V (1C), 10V (1A), 6.3V (0J)

Capacitance (pF)	Code	Tolerance	C0G		X5R			X7R		X8R
			2A (100V)	1H (50V)	1C (16V)	1A (10V)	0J (6.3V)	1H (50V)	1E (25V)	1H (50V)
10	100	F: $\pm 1\text{pF}$								
15	150	K: $\pm 10\%$								
22	220	M: $\pm 20\%$								
33	330									
47	470									
68	680									
100	101									
220	221									
330	331									
470	471									
680	681									
1,000	102									
1,500	152									
2,200	222									
3,300	332									
4,700	472									
6,800	682									
10,000	103									
22,000	223									
47,000	473									
100,000	104									
220,000	224									
470,000	474									
1,000,000	105									

Standard Thickness

0.60 mm

0.80 mm



Capacitance Range Chart

CKCL22(2012) [EIA CC0805]

Capacitance Range Chart

Temperature Characteristics: C0G ($0 \pm 30\text{ppm}/^\circ\text{C}$), X5R ($\pm 15\%$), X7R ($\pm 15\%$)

Rated Voltage: 100V (2A), 50V (1H), 25V (1E), 16V (1C), 10V (1A), 6.3V (0J)

Capacitance (pF)	Code	Tolerance	C0G		X5R			X7R			
			2A (100V)	1H (50V)	1C (16V)	1A (10V)	0J (6.3V)	2A (100V)	1H (50V)	1E (25V)	1A (10V)
10	100	F: $\pm 1\text{pF}$ K: $\pm 10\%$ M: $\pm 20\%$	■	■							
22	220		■	■							
47	470		■	■							
100	101		■	■							
220	221		■	■							
470	471		■	■				■			
1,000	102							■	■		
2,200	222							■	■		
4,700	472							■	■		
10,000	103							■	■		
22,000	223							■	■		
47,000	473							■	■	■	
100,000	104							■	■	■	■
220,000	224				■						■
470,000	474					■					
1,000,000	105						■				
2,200,000	225						■				

Standard Thickness

■ 0.85 mm



Capacitance Range Table

Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to +125°C, 0±30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number	
				Rated Voltage Edc: 100V	Rated Voltage Edc: 50V
10 pF	1310	0.60 ± 0.10	± 1pF	CKCM25C0G2A100F060AK	CKCM25C0G1H100F060AK
	2012	0.85 ± 0.15	± 1pF	CKCL22C0G2A100F085AK	CKCL22C0G1H100F085AK
15 pF	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A150K060AK	CKCM25C0G1H150K060AK
	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A220K060AK	CKCM25C0G1H220K060AK
22 pF	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A220K060AK	CKCM25C0G1H220K060AK
	2012	0.85 ± 0.15	± 10%	CKCL22C0G2A220K085AK	CKCL22C0G1H220K085AK
33 pF	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A330K060AK	CKCM25C0G1H330K060AK
	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A470K060AK	CKCM25C0G1H470K060AK
47 pF	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A470K060AK	CKCM25C0G1H470K060AK
	2012	0.85 ± 0.15	± 10%	CKCL22C0G2A470K085AK	CKCL22C0G1H470K085AK
68 pF	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A680K060AK	CKCM25C0G1H680K060AK
	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A101K060AK	CKCM25C0G1H101K060AK
100 pF	1310	0.60 ± 0.10	± 10%	CKCM25C0G2A101K060AK	CKCM25C0G1H101K060AK
	2012	0.85 ± 0.15	± 10%	CKCL22C0G2A101K085AK	CKCL22C0G1H101K085AK
220 pF	2012	0.85 ± 0.15	± 10%	CKCL22C0G2A221K085AK	CKCL22C0G1H221K085AK
	2012	0.85 ± 0.15	± 10%	CKCL22C0G2A471K085AK	CKCL22C0G1H471K085AK

Class 1 (Temperature Compensating)

Temperature Characteristics: CH (-25 to +85°C, 0±60 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number
				Rated Voltage Edc: 6.3V
100 nF	0906	0.45 ± 0.05	± 20%	CKCN27JB0J104M045BK

Class 1 (Temperature Compensating)

Temperature Characteristics: X5R (-55 to +85°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number		
				Rated Voltage Edc: 16V	Rated Voltage Edc: 10V	Rated Voltage Edc: 6.3V
22 nF	1310	0.60 ± 0.10	± 20%	CKCM25X5R1C223M060AK		
47 nF	1310	0.60 ± 0.10	± 20%		CKCM25X5R1A473M060AK	
100 nF	0906	0.45 ± 0.05	± 20%			CKCN27X5R0J104M045BK
	1310	0.60 ± 0.10	± 20%			CKCM25X5R0J104M060AK
220 nF	1310	0.60 ± 0.10	± 20%			CKCM25X5R0J224M060AK
	2012	0.85 ± 0.15	± 20%	CKCL22X5R1C224M085AK		
470 nF	1310	0.80 ± 0.15	± 20%			CKCM25X5R0J474M080AK
	2012	0.85 ± 0.15	± 20%		CKCL22X5R1A474M085AK	
1 µF	1310	0.80 ± 0.15	± 20%			CKCM25X5R0J105M080AK
	2012	0.85 ± 0.15	± 20%			CKCL22X5R0J105M085AK
2.2 µF	2012	0.85 ± 0.15	± 20%			CKCL22X5R0J225M085AK

Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number			
				Rated Voltage Edc: 100V	Rated Voltage Edc: 50V	Rated Voltage Edc: 25V	Rated Voltage Edc: 10V
470 pF	2012	0.85 ± 0.15	± 20%	CKCL22X7R2A471M085AK			
1 nF	1310	0.60 ± 0.10	± 20%		CKCM25X7R1H102M060AK		
	2012	0.85 ± 0.15	± 20%	CKCL22X7R2A102M085AK	CKCL22X7R1H102M085AK		
2.2 nF	1310	0.60 ± 0.10	± 20%		CKCM25X7R1H222M060AK		
	2012	0.85 ± 0.15	± 20%	CKCL22X7R2A222M085AK	CKCL22X7R1H222M085AK		
4.7 nF	1310	0.60 ± 0.10	± 20%		CKCM25X7R1H472M060AK		
	2012	0.85 ± 0.15	± 20%	CKCL22X7R2A472M085AK	CKCL22X7R1H472M085AK		
10 nF	1310	0.60 ± 0.10	± 20%			CKCM25X7R1E103M060AK	
	2012	0.85 ± 0.15	± 20%	CKCL22X7R2A103M085AK	CKCL22X7R1H103M085AK		
22 nF	2012	0.85 ± 0.15	± 20%		CKCL22X7R1H223M085AK		
47 nF	2012	0.85 ± 0.15	± 20%		CKCL22X7R1H473M085AK	CKCL22X7R1E473M085AK	
100 nF	2012	0.85 ± 0.15	± 20%		CKCL22X7R1H104M085AK	CKCL22X7R1E104M085AK	
220 nF	2012	0.85 ± 0.15	± 20%				CKCL22X7R1A224M085AK



Capacitance Range Table

Class 2 (Temperature Stable)

Temperature Characteristics: X8R (-55 to +150°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number
				Rated Voltage Edc: 50V
220 pF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H221M060AK
330 pF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H331M060AK
470 pF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H471M060AK
680 pF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H681M060AK
1 nF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H102M060AK
1.5 nF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H152M060AK
2.2 nF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H222M060AK
3.3 nF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H332M060AK
4.7 nF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H472M060AK
6.8 nF	1310	0.60 ± 0.10	± 20%	CKCM25X8R1H682M060AK