

MICRO SWITCH


A DIVISION OF HONEYWELL-REGULATOR COMPANY
POMONA, CALIFORNIA

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

MT-4RL2-A28

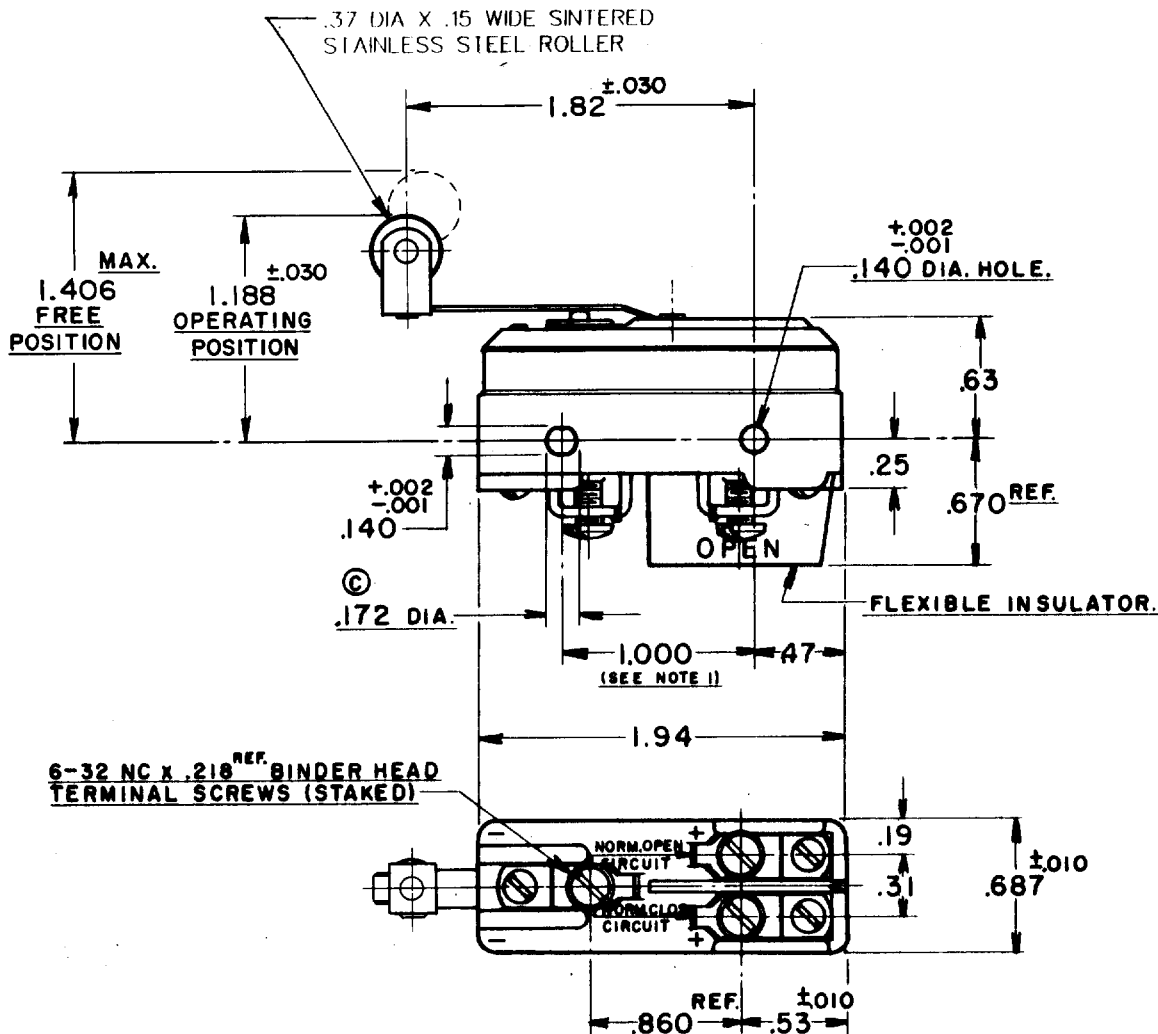

NOTE--

- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON $1.000 \pm .002$ CENTERS.
- 2- FOR BEST RESULTS EITHER POLARIZE THE SWITCH WITH THE COMMON TERMINAL WIRED IN NEGATIVE POLARITY OR MOUNT THE SWITCH WITH BRASS SCREWS AND SPACE AT LEAST .250 AWAY FROM MAGNETIC MATERIALS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE----- 12 OZ. MAX.

RELEASE FORCE----- 1 OZ. MIN.

DO NOT OVERTRAVEL MORE THAN .060

ELECTRICAL DATA

CONTACT ARRANGEMENT
S. P. D. T.

NON-POLARIZED

VOLTS D-C

125

250

MOTOR

1/4 HP +

—

RESISTIVE

10 AMPS

1.5 TO 3.0%

POLARIZED OR NON-MAGNETICALLY MOUNTED

VOLTS D-C
125
250

MOTOR
1/2 HP +
—

RESISTIVE
10 AMPS
1.5 TO 3.0%

* NOT SUITABLE FOR USE AT LESS THAN 1.5 AMPS
+ WILL NOT BREAK LOCKED ROTOR CURRENT

(B)

UNB. LAB. INC. LISTED RATING (NON-POLARIZED)
- LIGS - 10 A - 125 VDC OR AC; 1/4 HP - 125 VDC OR AC

SCALE - FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT

MT-4RL2-A28

DRAWING NUMBER

7

ISSUE

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

8

FO-90378

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK