

FED. MFR. CODE 91929

MT-4RL2

(M) MT-4RL2

ISSUE 9

MT-4RL2

M

DRAWING
NUMBER

4

Issue

85

RELEASE NO.

CHECK

CHECK

15

۷۶.

CHECK

25


AUG.

•

स.ज.स.

DRAWN

74-98

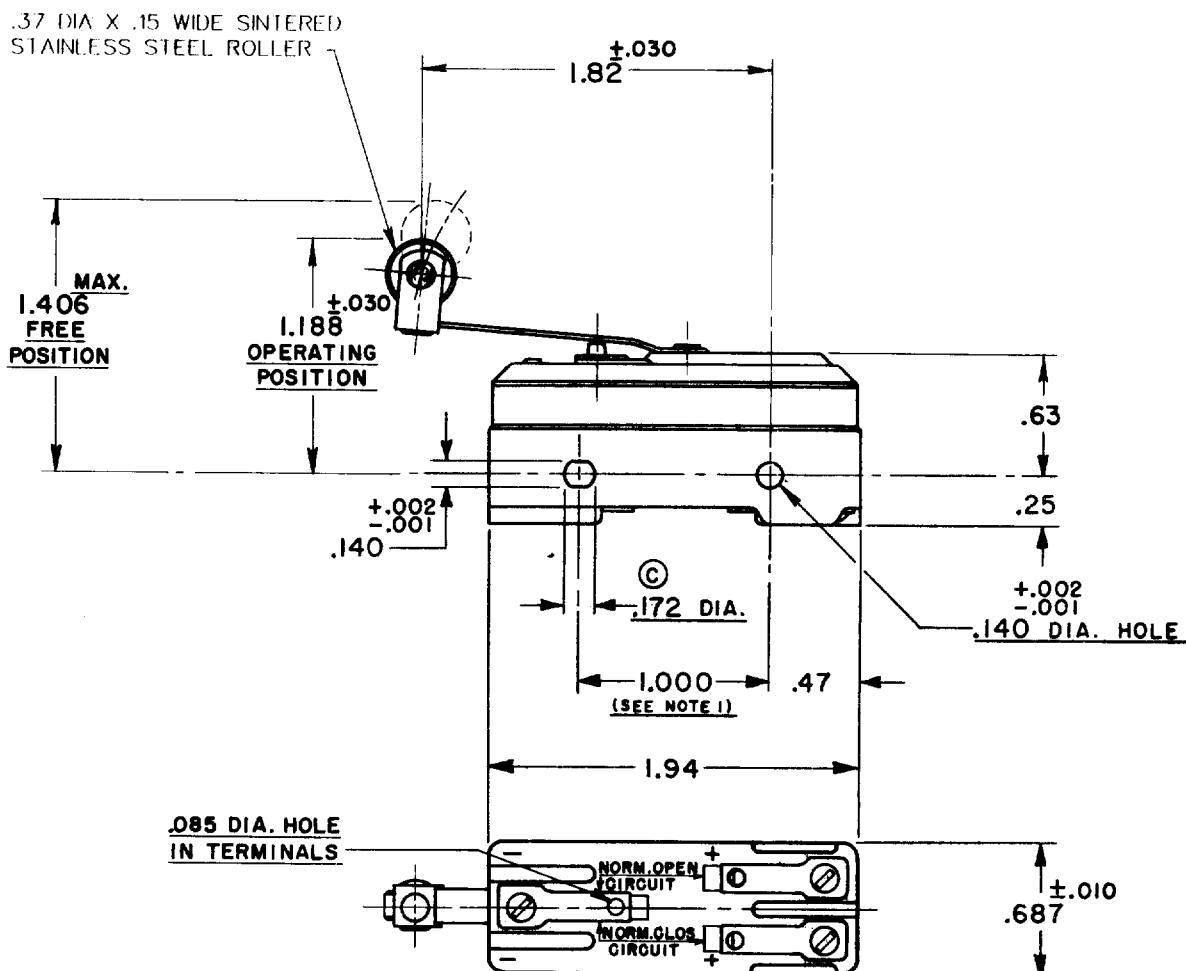

1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX. DIA. ON 1.000^{±.002} CENTERS.

**2-FOR BEST RESULTS EITHER POLARIZE THE SWITCH WITH THE COMMON
TERMINAL WIRED IN NEGATIVE POLARITY OR MOUNT THE SWITCH WITH
BRASS SCREWS AND SPACE AT LEAST .250 AWAY FROM MAGNETIC MATERIALS.**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA				SCALE FULL
OPERATING FORCE — — — — 12 OZ. MAX.	CONTACT ARRANGEMENT				DO NOT SCALE PRINT
RELEASE FORCE — — — — 1 OZ. MIN.	S. P. D. T.				UNLESS OTHERWISE SPECIFIED
DO NOT OVERTRAVEL MORE THAN .060	NON-POLARIZED	VOLTS D-C 125 250	MOTOR 1/4 HP + —	RESISTIVE 10 AMPS 1.5 TO 3.0*	DIMENSIONS ARE IN INCHES
	POLARIZED OR NON-MAGNETICALLY MOUNTED	VOLTS D-C 125 250	MOTOR 1/2 HP + —	RESISTIVE 10 AMPS 1.5 TO 3.0*	TOLERANCES ARE:
	* NOT SUITABLE FOR USE AT LESS THAN 1.5 AMPS + WILL NOT BREAK LOCKED ROTOR CURRENT				ONE PLACE (.0) ±.030
	UND. LAB. INC. LISTED RATING (NON-POLARIZED) - 125 TO A-125 VDC OR AC; 1/4HP-125 VDC OR AC;				TWO PLACE (.00) ±.015
					THREE PLACE (.000) ±.005
					ANGLES ±
					WEIGHT .070 LB.