


OP-AR62
M
DRAWING NUMBER
ISSUE
REVISE
C.N.T. 7 SEPT. 55
CHECK A.C.G. 7 SEPT. 55
CHECK B.C.H. 12 SEPT. 55
CHECK C.M.A. 26 AUG. 55
DRAWN 74-96.3

MICRO SWITCH
A DIVISION OF AMNELOPS-HONEYWELL REGULATOR COMPANY
PROSPER, ILLINOIS
FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
OP-AR62

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

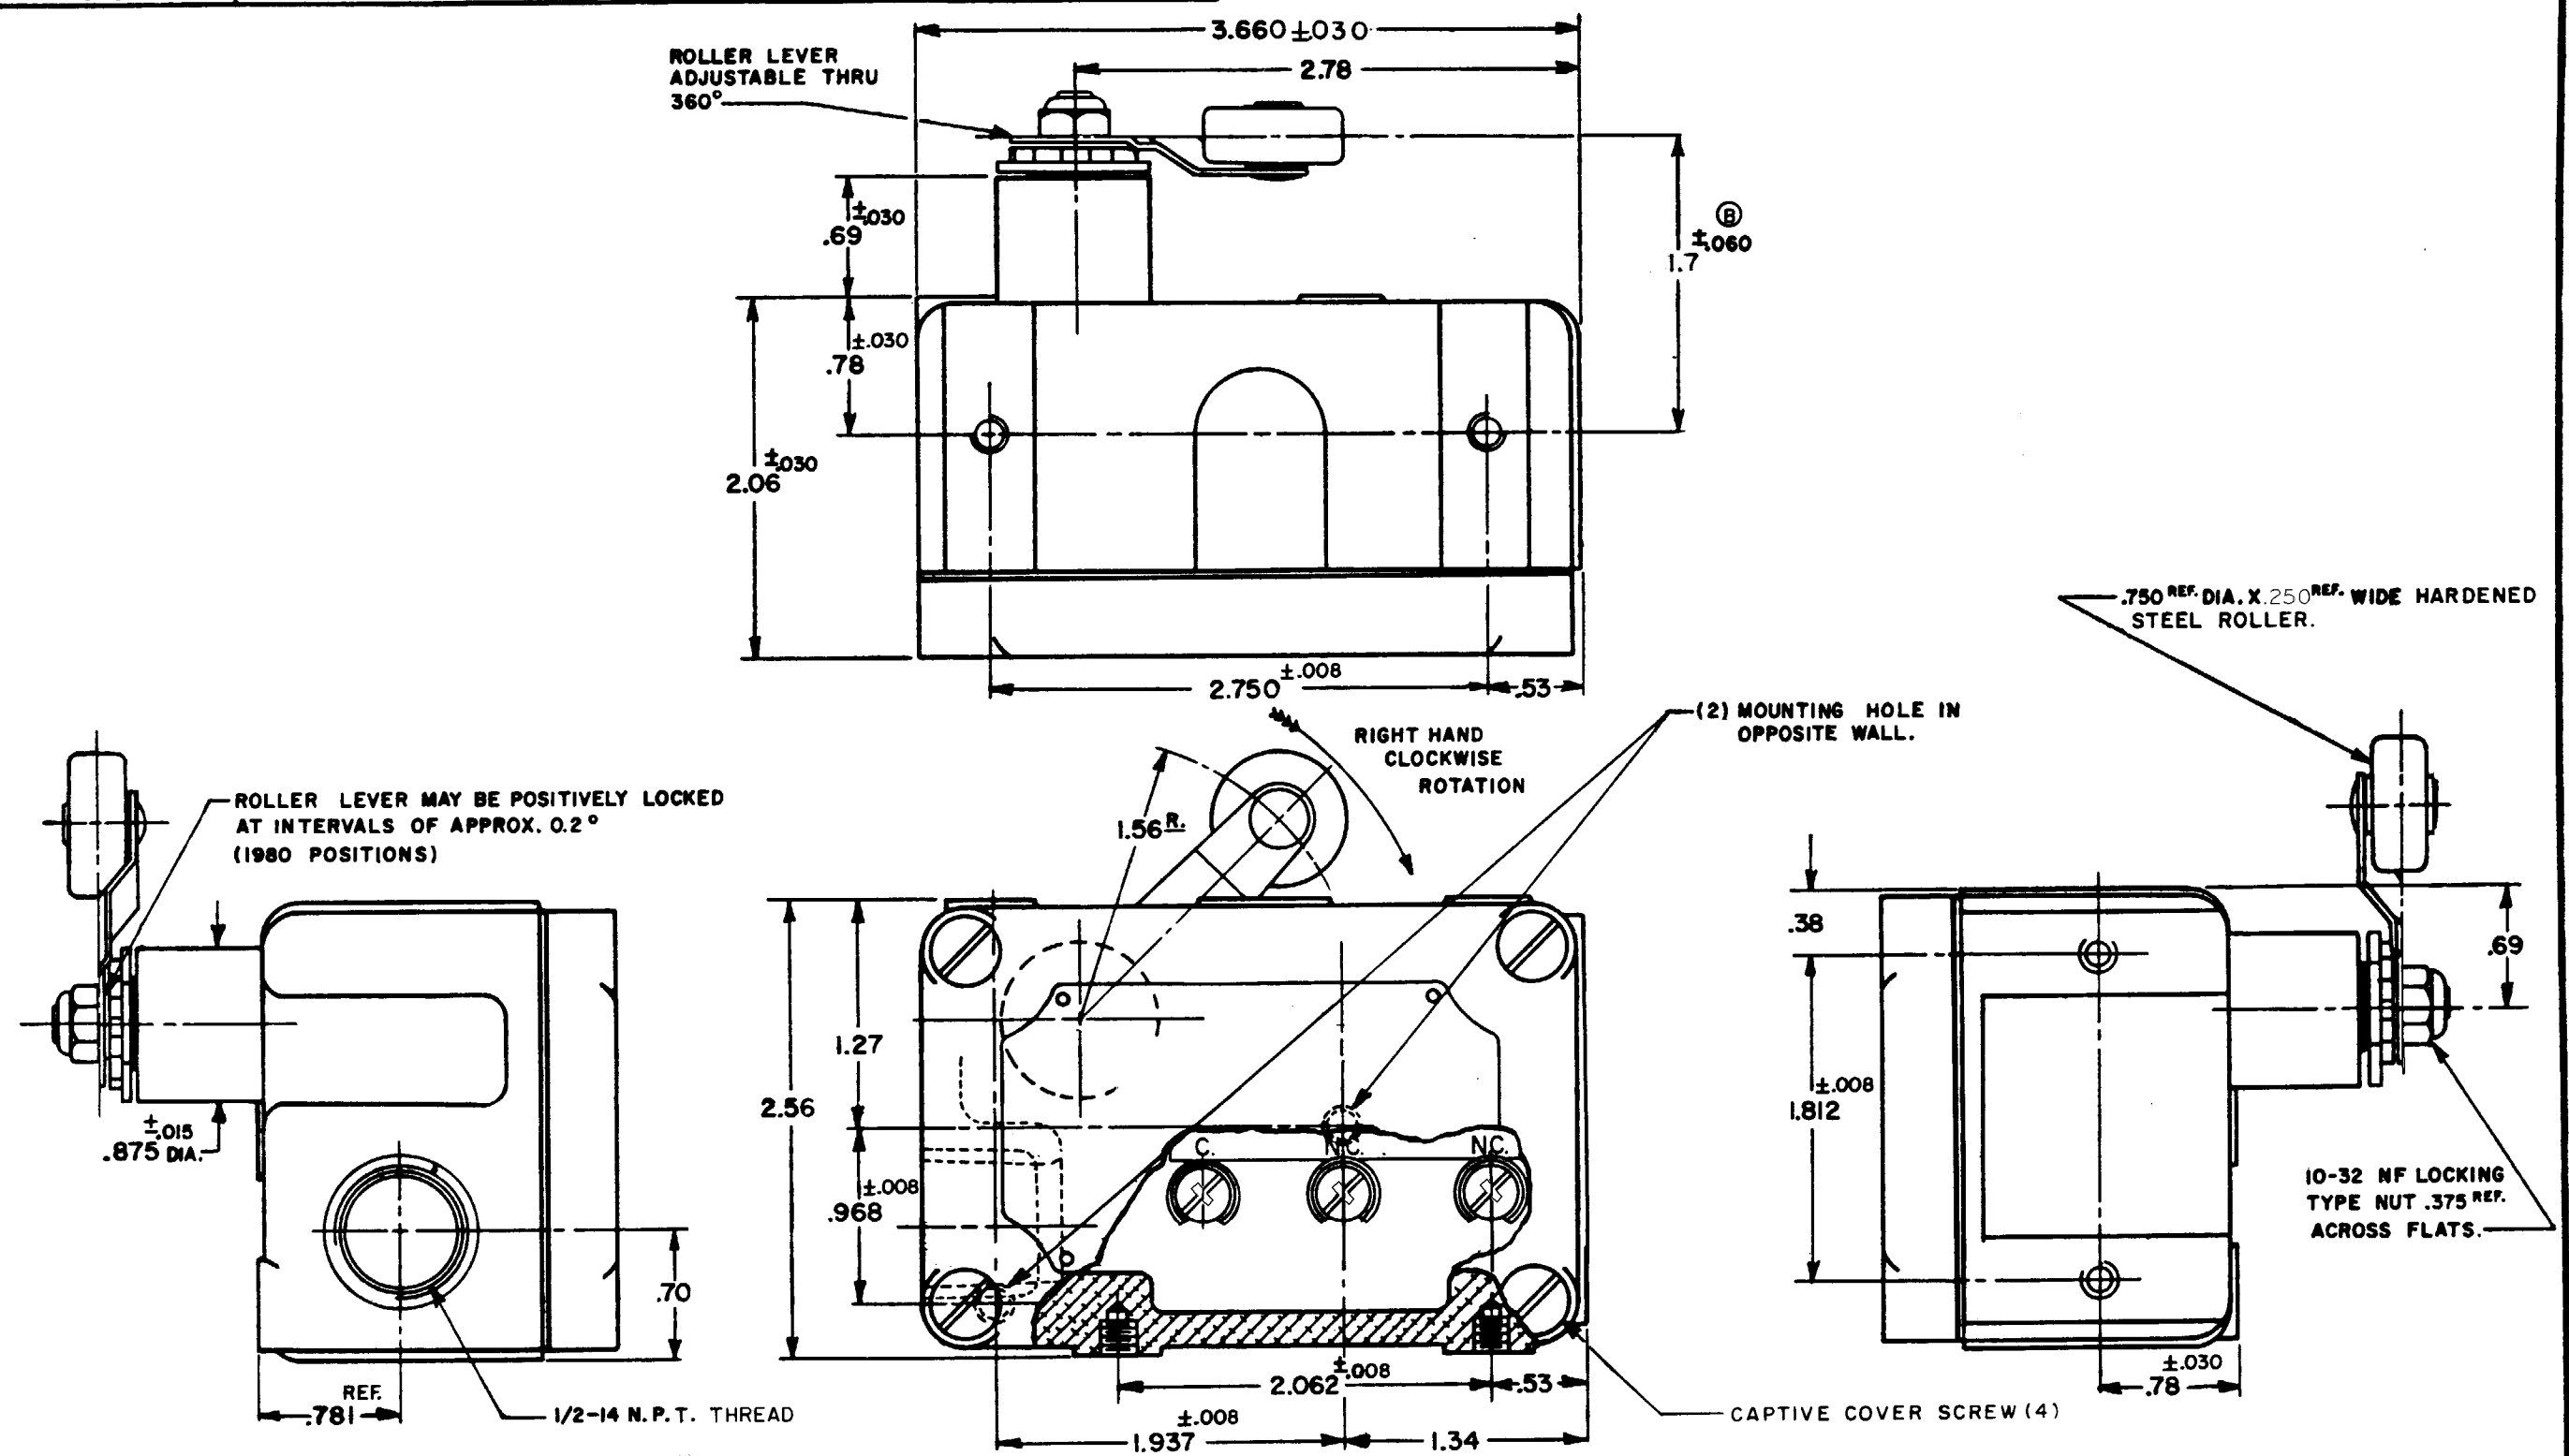

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 1/2-1 1/4 LBS.	CONTACT ARRANGEMENT S. P. D.T.	DO NOT SCALE PRINT
RELEASE FORCE ----- 1/4 LB. MIN.		UNLESS OTHERWISE SPECIFIED
PRETRAVEL ----- .219 MAX. 8°		DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .007 MAX. 1/4°		TOLERANCES ARE:
OVERTRAVEL ----- DO NOT OVERTRAVEL		ONE PLACE (.0) ± 0.030
MORE THAN 90°		TWO PLACE (.00) ± 0.015
BASIC SWITCH REPLACEMENT BZ-2R-P4		THREE PLACE (.000) ± 0.005
		ANGLES ±
		WEIGHT

NOTE -

1 - (8) MOUNTING SCREW HOLES, 10-32 NF-2B THREADS X .219 REF. DEEP.

2 - 8-32 NC X .219 REF. BINDER HEAD TERMINAL SCREWS AND CUP WASHERS

3 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE.