

MICRO SWITCH

A DIVISION OF HONEYWELL INFORMATION SYSTEMS
FED. MFR. CODE 91929

SWITCH - ENCLOSED






CATALOG LISTING

OPA-AR

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

OPA-AR
DRAWING NUMBER
5
ISSUE
X

REVISIONS
A CO. 9182
14 SEPT. 55
B CO. 11034
K. A. F.
13 DEC. 56
C CO. 13827
L. S. D.
17 JULY 59
D CO. 14185
K. L. B.
8 DEC. 60
E CO. 16851
M. B. F.
14 DEC. 62
F CO. 18276
H. B. W.
22 JUN. 64
G CO. 19878
M. B. F.
10 NOV. 66
H CO. 22652
W. E. G.
4 APR. 67
J CO. 28103
D. L. F.
21 JUN. 69
K CO. 55987
J. A. S.
5 NOV. 84

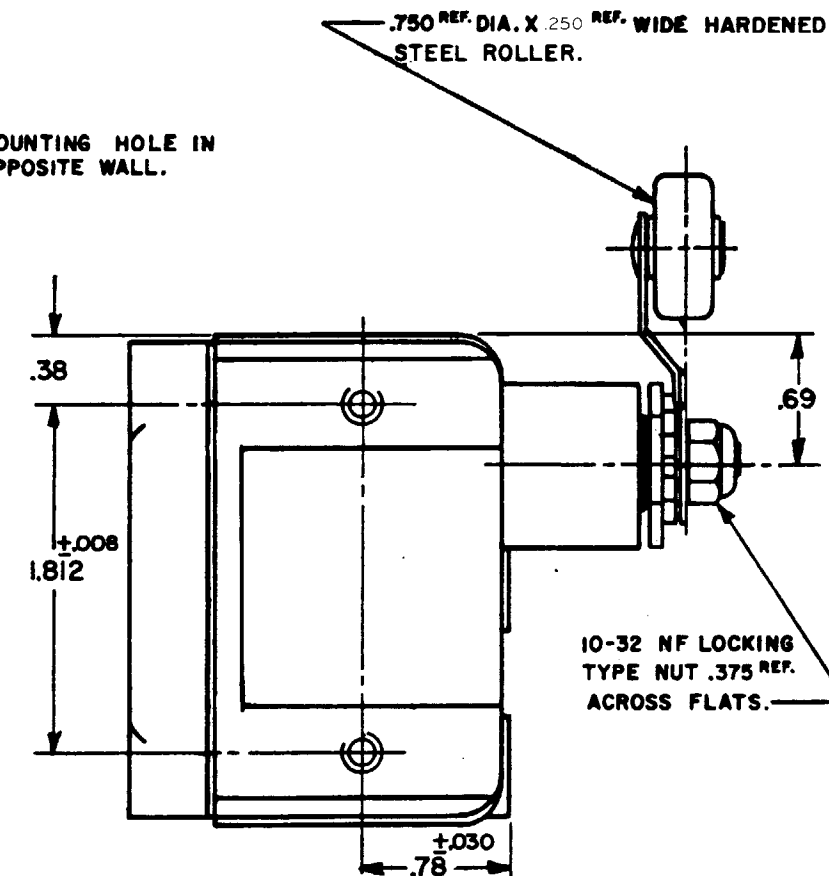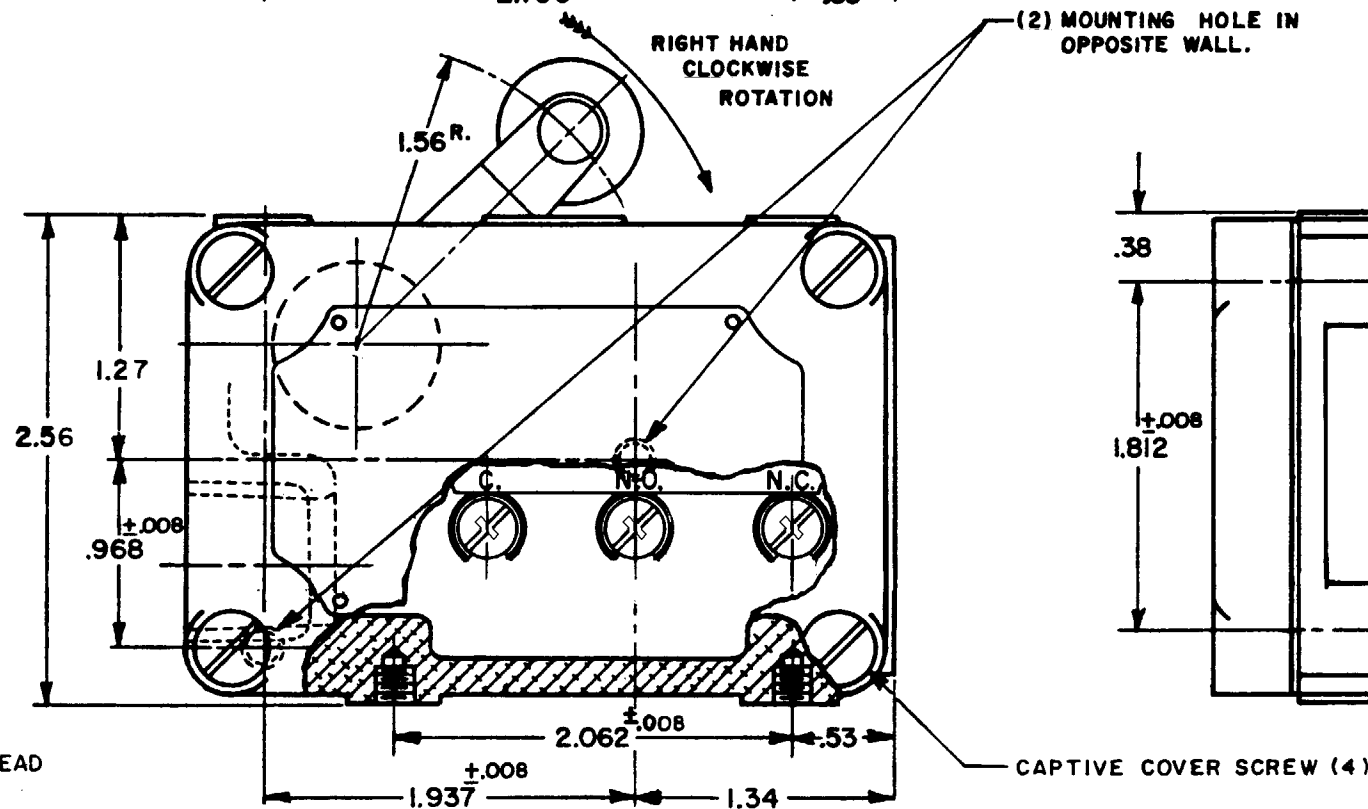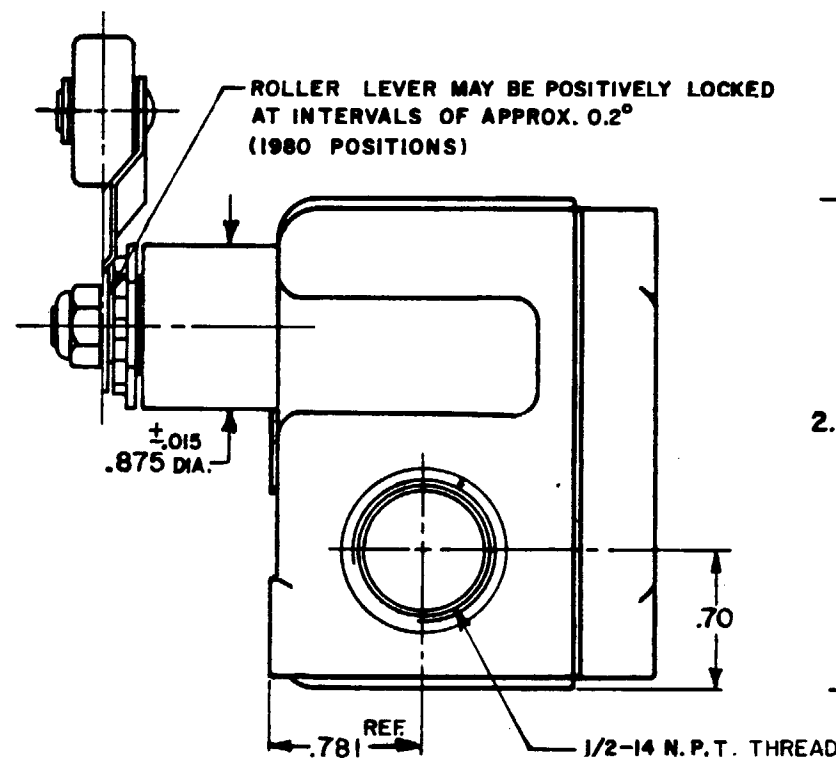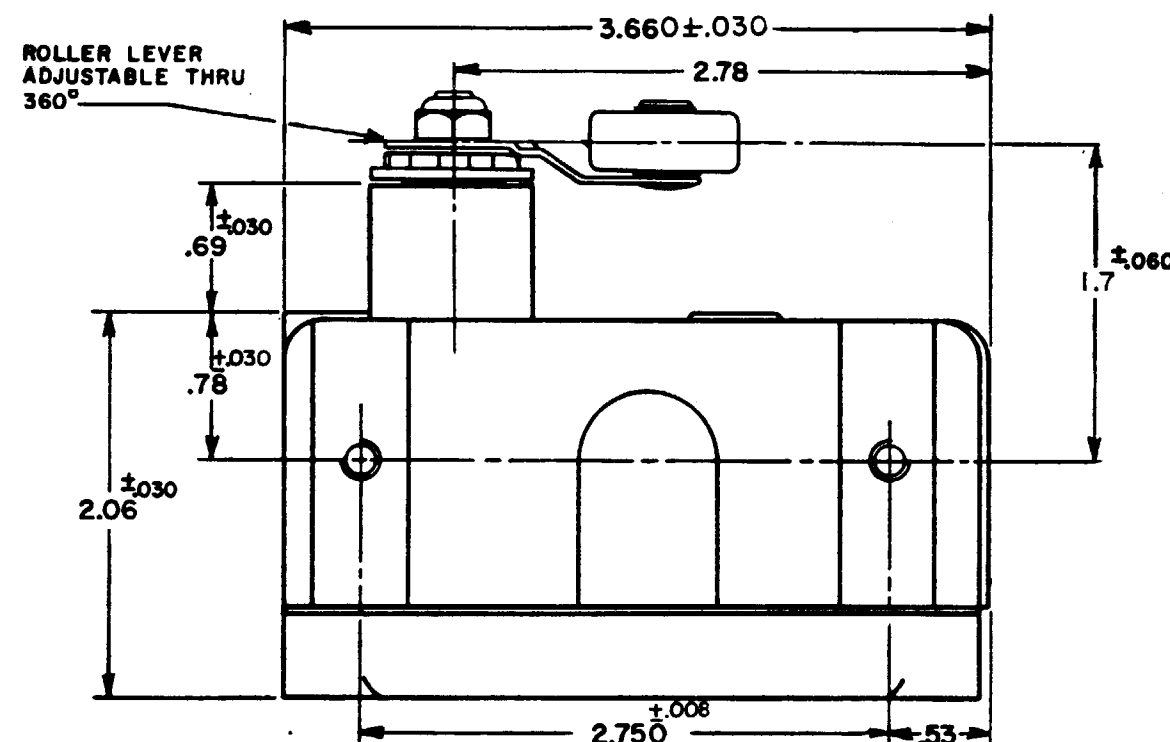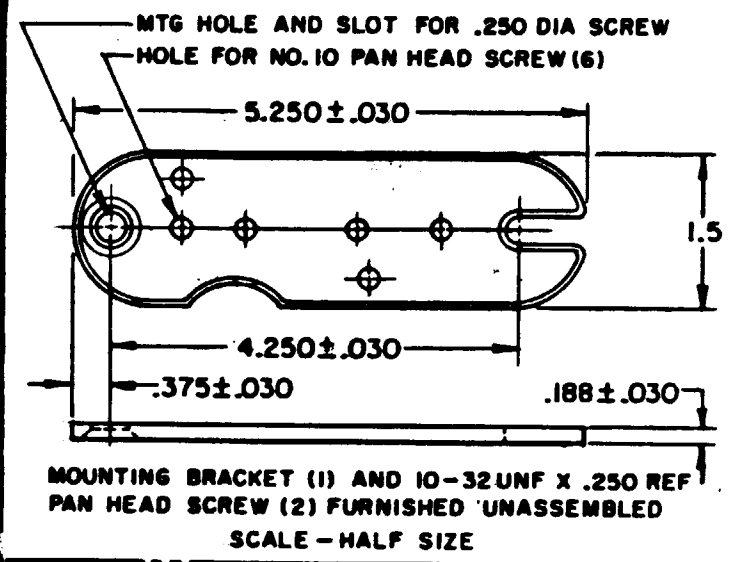

CHARACTERISTICS

OPERATING FORCE ----- 12-32 OZ.
RELEASE FORCE ----- 8 OZ. MIN.
PRETRAVEL ----- .219 MAX. (8°)
DIFFERENTIAL TRAVEL ----- .012 MAX (0°24')
OVERTRAVEL ----- DO NOT OVERTRAVEL MORE THAN 25°

ELECTRICAL DATA

CONTACT ARRANGEMENT
S. P. D. T.
-L 23-
20 A-125, 250 OR 480 VAC
10 A-125 VAC "L"
1 HP-125 VAC, 2 HP-250 VAC
1/2 A-125 VDC, 1/4 A-250 VDC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

NOTE-

- (8) MOUNTING SCREW HOLES, 10-32 NF-28 THREADS X .219 REF. DEEP.
- 8-32 NC X .219 REF. BINDER HEAD TERMINAL SCREWS AND CUPWASHERS.
- SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE.

