
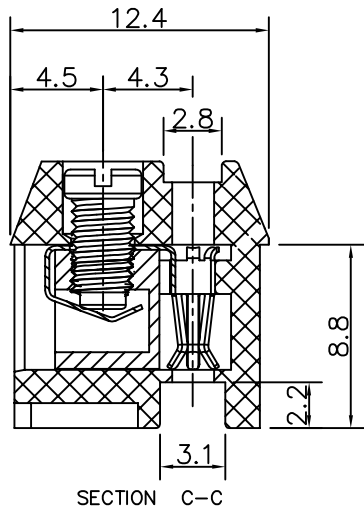
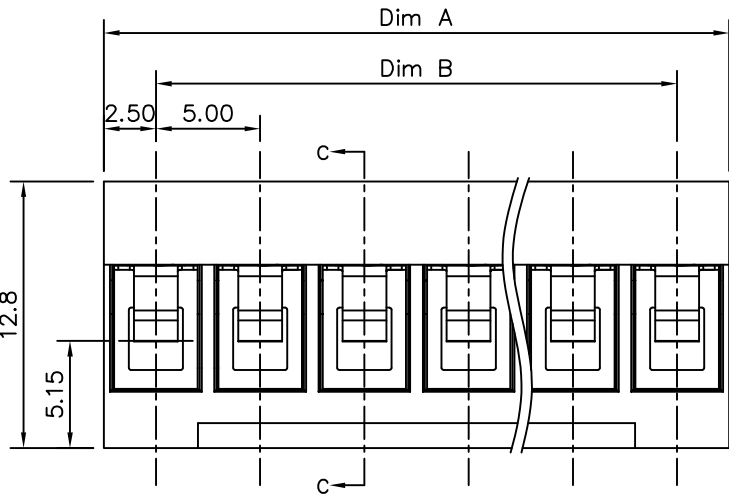


SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

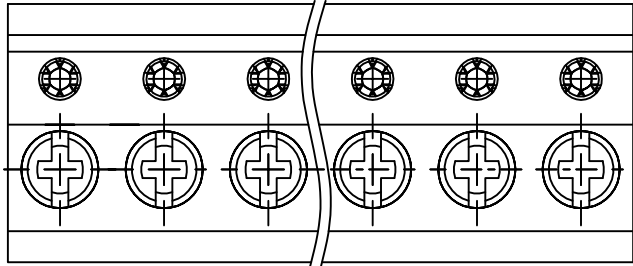

- Material**
- Clamp: Brass (Cu Zn) Ni plated
 - Terminal screw: Steel Zinc plating "+/-" slot type
 - Female contact: PhBz,tin plated
 - Terminal housing: Thermoplastic (UL94V-0)
- Electrical**
- Voltage rating: 300V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 12-26
 - Stranded wire(AWG): 12-26
 - Torque: 3.5Lb-In
 - Screw: M3.0
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to+115°C
 - Safety Approval: 

RoHS Compliant

Part Number:

OSTTXXX0200

No. of Poles	COLOR
02: 2 Poles	0: Black (Standard)
03 3 Poles	5: Green
... ..	6: Blue
24 24 Poles	8: Grey

N = Number of poles
 Dim A=Nx5.0
 Dim B=(N-1)x5.0

Poles	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.							
TITLE		OSTTX-5.0mm Series "+/-" screw, square hole					
PART NO.		OSTTXXX0200			DWG NO. OSTTXXX0200.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
Jacke	Jacke	Jacke	Jacke		UNIT: mm	X. ±0.50	
2009.08.10	2009.08.10	2009.08.10	2009.08.10	SHEET: 01/01	SCALE: NONE	X.X ±0.30	
				REV.: B		X' ±0.10	
						X'' ±1"	