


Conformity to RoHS Directive

SHAPES AND DIMENSIONS



Dimensions in mm

[illegible]


Micro-strip line for 0.4mm thick glass-epoxy substrate.

Item			Minimum value	Typical value	Maximum value
iDEN port to Ant port					
iDEN pass band		MHz	806	—	941
Insertion loss	[25°C]	dB	—	—	0.6
	[−30 to +85°C]	dB	—	—	0.7
iDEN port return loss		dB	14	—	—
Ant port return loss		dB	14	—	—
	1575MHz	dB	16	—	—
Attenuation	1612 to 1648MHz	dB	18	—	—
	1792 to 1856MHz	dB	14	—	—
	2 to 3GHz	dB	5	—	—
GPS port to Ant port					
GPS pass band		MHz	1574.42	—	1576.42
Insertion loss	[25°C]	dB	—	—	0.7
	[−30 to +85°C]	dB	—	—	0.8
GPS port return loss		dB	14	—	—
Ant port return loss		dB	14	—	—
Attenuation	806 to 928MHz	dB	20	—	—
GPS port to iDEN port					
Low band attenuation	806 to 928MHz	dB	20	—	—
Attenuation	1575MHz	dB	16	—	—
	1612 to 1648MHz	dB	18	—	—
High band attenuation	1792 to 1856MHz	dB	14	—	—


- All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


Lo-BAND PORT S21

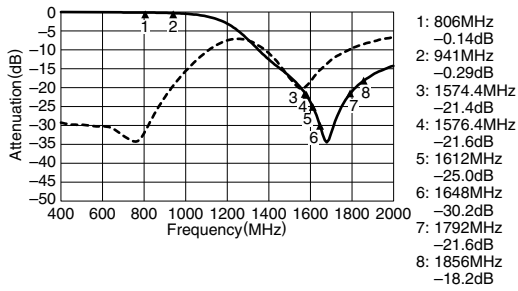


Hi-BAND PORT S31

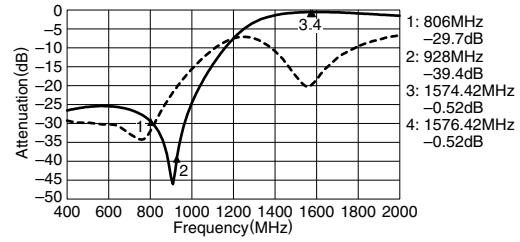


COMMON PORT RETURN LOSS S11

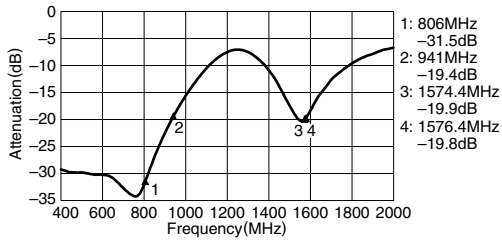


ISOLATION S23

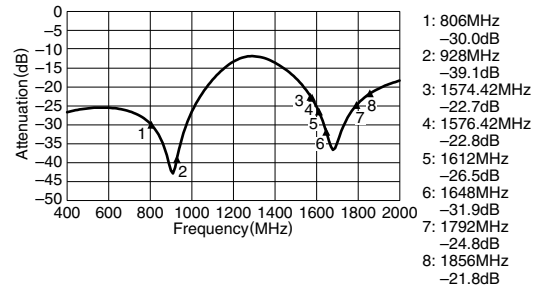


Lo-BAND PORT RETURN LOSS S22

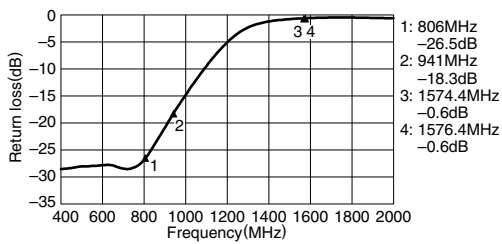


Hi-PORT RETURN LOSS S33

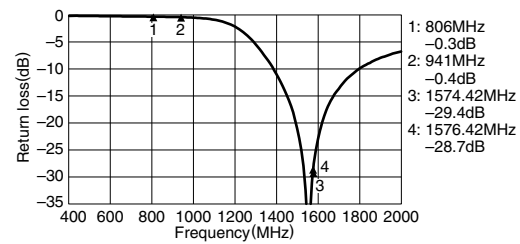


SMITH CHARTS




S11




S22



S33



S21



S31