


GU256X128E-3900

SIMPLIFIED DATASHEET

■ Features

Largest VFD in the 256x128 dot size. High-impact graphic module. For bigger and bolder information display.

■ Physical dimension

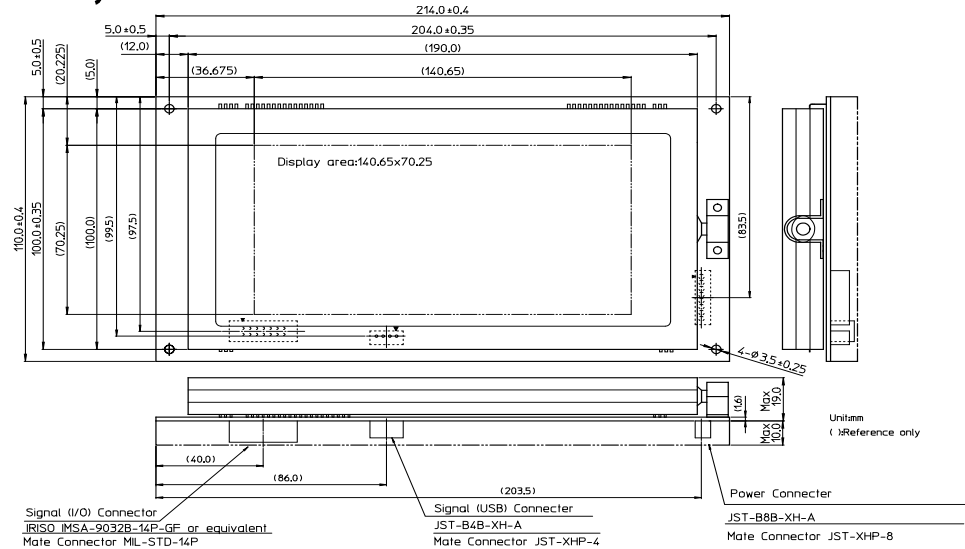

Get full specification



Click here to go to request form.

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC1	4.75	5.00	5.25	VDC	-
	VCC2	11.4	12.0	12.6	VDC	-

■ Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Parallel I/F						
Logic input current	I _{PIH}	-	-	1.0	μADC	-
D0-D7,/WR	I _{PIH}	-	-	-200	μADC	-
Logic input voltage	V _{PIH}	0.8VCC1	-	VCC1	VDC	-
D0-D7,/WR	V _{PIH}	0	-	0.2VCC1	VDC	-
Logic output voltage	V _{POH}	3.5	-	VCC1	VDC	I _{OH} =-10 μA
RDY	V _{POL}	0	-	0.6	VDC	I _{OL} =4mA
RS-232 I/F						
Logic input voltage	V _{SIH}	3	-	15	VDC	-
RXD, DSR	V _{SIL}	-15	-	-3	VDC	-
Logic output voltage	V _{SOH}	5	-	-	VDC	R _L =3KΩ
RXD, DSR	V _{SOL}	-	-	-5	VDC	-
Logic input Impedance	R _{SIN}	3	-	7	KΩ	-
RXD, DSR						-
General-purpose I/O port						Abbreviation
Power Supply Current 1	ICC1	-	100	150	mADC	-
Power Supply Current 2	ICC2-1	-	1.0	1.3	ADC	All dots ON
	ICC2-2	-	0.7	0.9	ADC	All dots OFF
Power Consumption		-	12.5	16.35	W	All dots ON

■ Optical Specifications

Parameter	
Luminance	350 cd/m ² Min. (500 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

■ Environmental Specifications

Parameter	
Operating Temperature	-40 ~ +70 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

■ Physical Specifications

Parameter	
Number of Dots	32,768 (256 x 128)
Display Area	140.65 mm x 70.25mm
Dot Size (X x Y)	0.4 mm x 0.4 mm
Dot Pitch (X x Y)	0.55 mm x 0.55 mm
Weight	About 640 g

■ Interface

Parallel(CMOS), Asynchronous Serial (RS232), I/O port

■ Pin Assignment

Pin No.	Signal	Pin No.	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	GND	10	/WR
11	GND	12	RDY
13	GND	14	GND
15	VCC1	16	VCC1

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	RXD	19200bps
2	DTR	38400bps*
3	DSR	(*:Default setting)
4	TXD	
5	TEST	
6	VCC1	
7	GND	

(Power connector)

Pin No.	Signal
1	VCC1
2	GND
3	VCC2
4	GND
5	TEST

(General-purpose I/O port:Abbreviation)

■ Selectable Font

Parameter	
ASCII, KANA	All Font Size
International	6 x 8 / 8x16 / 16x32
2-byte character	16x16
Character numbers	42 x 16 by ASCII
	16 x 8 by 16 x 16 dot 2-byte character
	8 x 8 by 16 x 32 dot ASCII

■ Functions

Parameter	
Variable Character display	Variable Action Commands
Scroll function	Line / BOX Draw
Display Power Auto ON/OFF	AND/OR/XOR Mixture display
User Windows function	Program Macro function
I/O Port Control Function	Graphic DMA mode
Bit image	
Variable stored settings	
etc.	

