

Experience Truly Immersive Audio

Spatial Audio Technology



www.ti.com/spatialaudio

Spatial Audio Technology

Demand for Mobile Cinematic Experience

Mobile consumer devices offer impressive visuals, but the overall experience is diminished by space-constrained audio systems that lack clarity and depth. Audio applications suffer from a limited soundstage, where multiple speakers sound like a single speaker because of their close placement. Until now, designing these systems has required programming complex algorithms and DSPs.

Spatial Audio Brings Immersive Sound to Your Systems

Spatial Audio products from Texas Instruments convert the small soundstage of smartphones, tablets, laptops, and sound bars into a much wider and more exciting audio experience. With a simple implementation of various spatial sound enhancements—including accurate sound beamforming and crosstalk cancellation—TI provides spatially-enhanced audio solutions for multi-speaker applications.

Comprehensive Development and Evaluation System

TI's simplified audio effect programming eliminates the need for algorithm tuning or DSP experts on your design team. Simply input the unique parameters of your design and the easy-to-program spatial processing engine outputs the spatial coefficients which can be loaded into the evaluation board GUI and tested immediately. Sound enhancement solutions can be tailored to a specific application and the simple, iterative process allows easy design updates for future systems.




How Immersive Spatial Audio Technology Works

Beamforming, Crosstalk Cancellation, and HRTF

TI's Spatial Audio technology uses a combination of beamforming, crosstalk cancellation, and head related transfer function (HRTF) algorithms to overcome the physical boundaries of space-constrained systems and deliver a truly immersive audio experience.

Spatial Audio Technology Combines

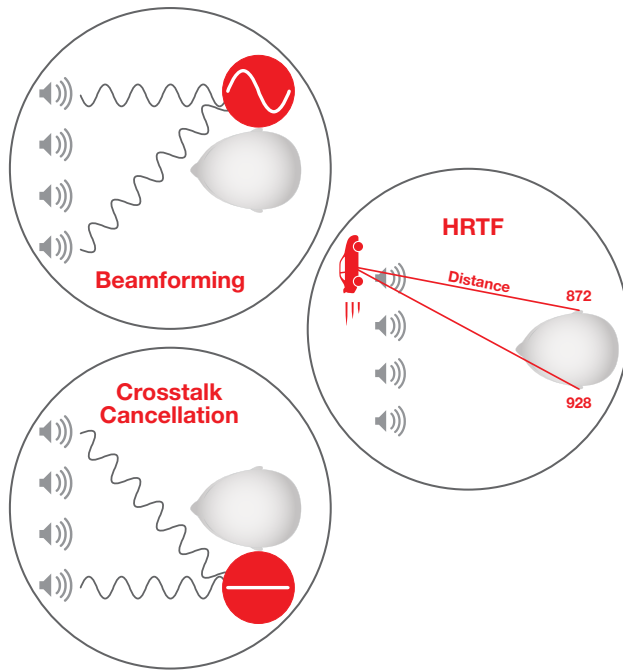

Beamforming creates areas of sound enhancement with the addition of constructively-interfering sound waves to augment other sound waves to produce a richer sound palette for the listener.

In contrast to beamforming, crosstalk cancellation uses destructive wave interference to cancel unwanted signals. Anti-waves—or cancellation waves—sent to the right ear cancel unwanted left channel audio signals. The same happens to unwanted right channel signals at the left ear. The result is distinct right- and left-channel sound enhancement areas that promote an elevated sense of audio placement in 3D space.

Sound wave processing through HRTF creates the perception that sound is coming from various directions. This psycho-acoustic effect localizes an audio source in space by considering that sound waves enter the ears at different times and with varying intensities due to the difference in distance between ears. By creating the perception of a temporal difference in each ear, HRTF places sounds in realistic 3D space.


Spatial Audio Development System

Complex Algorithm Programming Simplified


TI's web-based spatial audio software tool includes an easy-to-use speaker array coefficient generator that creates unique spatial audio coefficients in a few easy steps. Included with the evaluation board is a control graphical user interface (GUI) that configures the device, loads spatial coefficients, and provides a graphic equalizer.

The Spatial Audio development system simplifies and shortens development time.

1 Create speaker array coefficients online

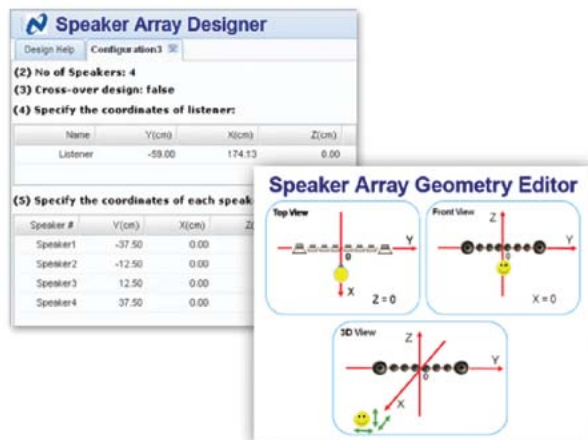

2 Download coefficients to your system or the evaluation board

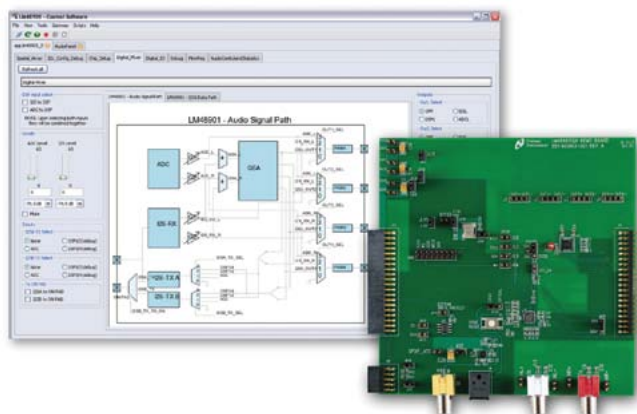

3 The GUI automatically determines settings and configures the device

Spatial Audio Products


The family of Spatial Audio products are scalable for devices the size of a credit card to those the length of a wall. Spatial Audio technology is designed for quick deployment across your entire product portfolio from tablets to sound bars.

The LM48901 directly supports four speaker channels and optionally will support two speaker channels individually plus two paralleled speaker channels to implement a 2.1 channel audio solution. LM48903 support stereo configurations. Additionally, LM48901 devices can be daisy-chained to support groups of four speaker channels each, giving you simple support for multi-speaker systems.

Complete Audio Solution for High-Fidelity Systems

The Spatial Array ICs are complete audio solutions for space-constrained systems and include:

- Spatial processing DSP
- Integrated Class D amplifiers
- Analog and digital inputs
- Flexible multi-channel capability
- Simple audio effect programming

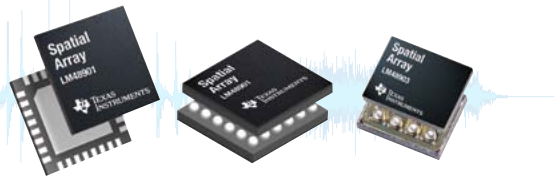

LM48901 and LM48903 Specifications

- 87 dBA SNR
- 22 mA quiescent supply current
- 5V PV_{DD} , 8 Ω RL, THD+N 1% 2W output power per channel
- 0.06% THD+N
- 89% efficiency per channel
- 71 dB PSRR at 217 Hz
- 1 μ A shutdown current

Key Features

- Spatial sound processing
- I²S digital input
- Differential-input stereo ADC
- Advanced edge rate control reduces EMI
- Click and pop suppression
- Micro-power shutdown
- Space-saving package options

Design Resources and References

In addition to powerful, easy-to-use programming tools, TI's Spatial Audio technology is supported by online resources and references.



**TI E2E™
Community**

E2E Audio Forum

www.ti.com/e2eaudio

Comprehensive Evaluation System

Including hardware, software, and sample board configurations

www.ti.com/spatialaudio

Demo Videos and Tutorial

www.ti.com/spatialaudio

Product samples, datasheets, and more can be found in the LM48901 and LM48903 product folder

www.ti.com/product/lm48901

www.ti.com/product/lm48903

Visit **www.ti.com/spatialaudio** to see a demonstration of Spatial Audio technology, download datasheets, and order samples.

To see the entire TI Audio Solutions portfolio, visit **www.ti.com/audio**.

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty, or endorsement thereof.

The platform bar is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated