




(1,27 mm) .050"

ISDF, CC03, TSDF, T1M44 SERIES


ISDF-07-D-M



ISDF-10-D-S




TSDF-10-D-S



T1M44-L-2830-01-G

CC03L-2830-01-G



# DISCRETE WIRE HOUSINGS & CONTACTS

Mates with:  
TFM, TFC

## SPECIFICATIONS

For complete specifications  
see [www.samtec.com?ISDF](http://www.samtec.com?ISDF)

Insulator Material:

Black LCP

Contact Material:

BeCu

Plating:

Au over 50µ" (1,27 µm) Ni

Operating Temp Range:

-35°C to +80°C (PVC)

-55°C to +125°C (\*Teflon®)

Voltage Rating:

275 VAC (PVC)

235 VAC (\*Teflon®)

Wire: 28 or 30 AWG

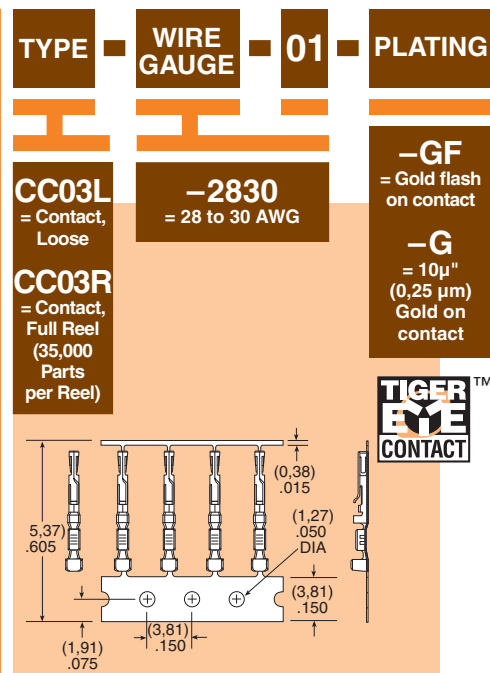
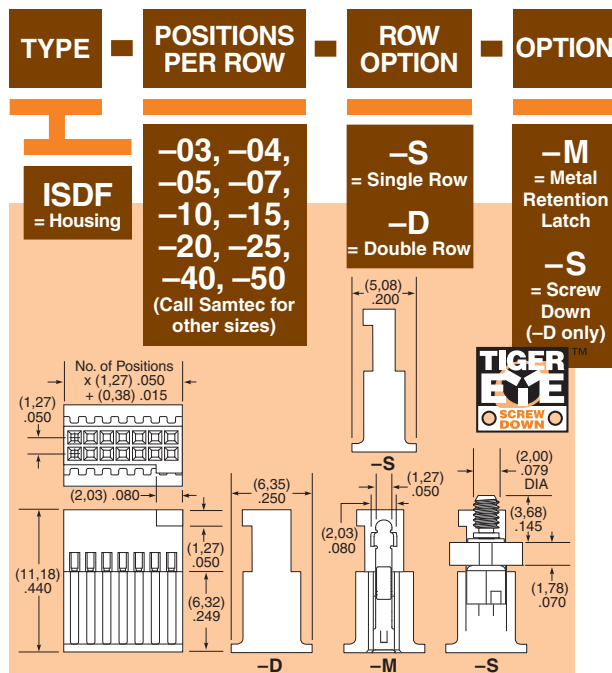
RoHS Compliant: Yes



## HAND TOOLS

28 to 30 AWG:

CAT-HT-203-2832-11

\*DuPont™ Teflon® is a  
registered trademark of the  
E.I. du Pont de Nemours  
and Company or its affiliates.Note: Some lengths, styles  
and options are non-standard,  
non-returnable.Mates with:  
SFM, SFC

## SPECIFICATIONS

For complete specifications  
see [www.samtec.com?TSDF](http://www.samtec.com?TSDF)

Insulator Material:

Black LCP

Contact Material:

BeCu

Plating:

Au over 50µ" (1,27 µm) Ni

Operating Temp Range:

-35°C to +80°C (PVC)

-55°C to +125°C (\*Teflon®)

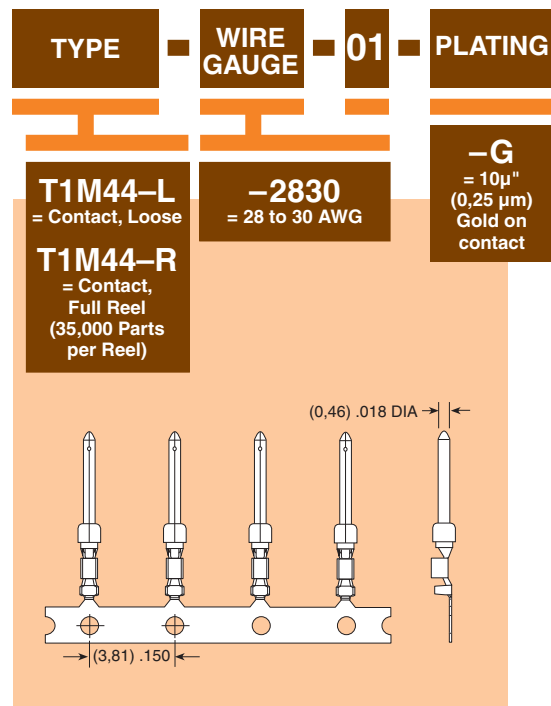
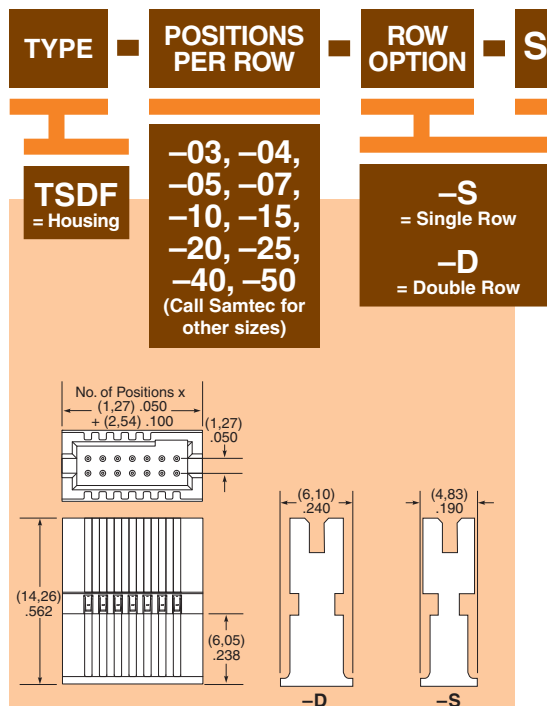
Wire: 28 or 30 AWG

RoHS Compliant: Yes



## APPLICATION SPECIFIC OPTION

- Color coded cable  
available (\*Teflon® N/A)
- Other plating available  
Call Samtec.

\*DuPont™ Teflon® is a  
registered trademark of the  
E.I. du Pont de Nemours  
and Company or its affiliates.Note: For wiring option  
information refer to drawing  
on web.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM