

Fuseholder Open Design, Holder for PSC 125V, THT



125 VAC · 5 A (UL)

**Description**

- Through hole mounting

Standards

- UL 4248-1 / UL 512

Approvals

- UL File Number: E41738

References

This type is Phase-out without alternate type

Last order date: 31.12.2012

Fuseholder to [PSC 125V](#)**Weblinks**



[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	PSC Fuse	Soldering Methods	Wave
Mounting	PCB	Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Terminal	Solder THT	Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Rated Voltage	125 VAC		
Rated current	5 A (UL)		
Degree of Protection	IP 30		
Material: Terminals	Tin-Plated Copper Alloy		
Unit Weight (Socket/Cap)	0.7 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		

Dimensions

10.5 mm

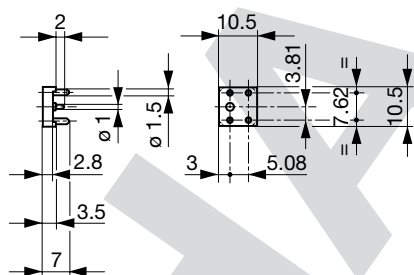

Drilling diagram

Variants

Holder	Order Number
•	7149.9017.01

Packaging Unit

Plastic Bag (100 pcs.)