

Fuseholder Open Design, Holder for MSB and 172876, THT



125 VAC/DC · 7 A (UL/CSA)

**Standards**

- UL 4248-1 / UL 512
- CSA C22.2 no. 39

**Approvals**

- UL File Number: E41738
- CSA File Number: 23151

**References**

Packaging Details  
Fuseholder to [MSB](#); [172876](#)

**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#),  
[Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#),  
[SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)



**Technical Data**

|                              |                                |
|------------------------------|--------------------------------|
| Fuse-Link                    | 2 x 7 mm                       |
| Mounting                     | PCB                            |
| Terminal                     | Solder THT                     |
| Rated Voltage                | 125 VAC/DC                     |
| Rated current                | 7 A (UL/CSA)                   |
| Degree of Protection         | IP 00                          |
| Admissible Ambient Air Temp. | -40 °C to 85 °C                |
| Climatic Category            | 40/085/21 acc. to IEC 60068-1  |
| Material: Socket             | Thermoplastic, black, UL 94V-0 |
| Material: Terminals          | Tin-Plated Bronze              |
| Unit Weight (Socket/Cap)     | 0.45 g                         |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.   |
| Product Marking              | Approvals                      |

|                              |                                                               |
|------------------------------|---------------------------------------------------------------|
| Soldering Methods            | Wave                                                          |
| Solderability                | 235 °C / 2 sec acc. to IEC 60068-2-20,<br>Test Ta, method 1   |
| Resistance to Soldering Heat | 260 °C / 10 sec acc. to IEC 60068-2-20,<br>Test Tb, method 1A |

**Dimensions**

10 mm

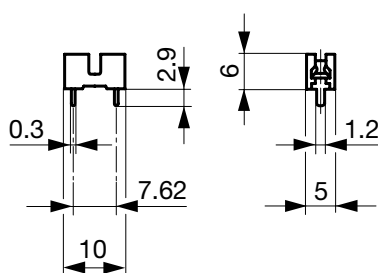

Drilling diagram

**Variants**

| Holder | Order Number |
|--------|--------------|
| ●      | 7090.9020.xx |

**Packaging Unit**

- .xx = .03 Plastic Bag (100 pcs.)
- .xx = .55 Blister Tape (500 pcs.)