

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingergrip, Rear-Side, grau or black



250 VAC · 2.5W/10A



GAM
T1 NNO

Description

- IP 67 from Front-Side
- Screw type fuse carrier

References

We recommend for new applications the type **23312P**
Last order date: 31.12.2013

Weblinks


pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product

Technical Data

Fuse-Link	6.3 x 32mm
Mounting	Panel Mount, Rear Side
Mounting	Fixing Nut
Terminal	Solder
Rated Voltage	250VAC
Rated current	10A
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23°C
Degree of Protection	IP 67
Admissible Ambient Air Temp.	-40°C to 85°C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, Nature
Material: Cap	Thermoplastic, Nature
Unit Weight (Socket/Cap)	23 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	 Type, Dielectric strength, Current

Soldering Methods	Iron
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness s	max 4 mm

Dimensions

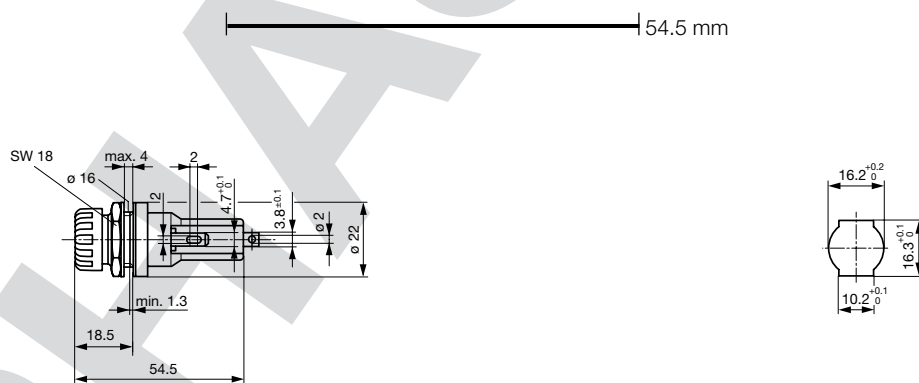

Mounting holes

Variants

Holder	Cap	Degree of Protection	Colour Holder	Colour Cap	Reference	Order Number
●	Fingergrip	IP 67	grey	Light-Grey	23463P	7092.6150
●	Fingergrip	IP 67	black	black	23463NJP	7092.6160

Packaging Unit

Bulk (100 pcs.)

PHASE OUT