

IEC Appliance Inlet C6 with Line Switch



Snap-In Version

**Description**

- Panel Mount:
Snap-in version, from front side
- Appliance Inlet, Pin temperature 70 °C, Protection class I,
- Line Switch 1- or 2-pole
- Solder, Quick Connect or PCB Terminal

Approvals

- VDE Certificate Number: 40002273
- CSA File Number: 1020538

Characteristics

- Line switch non-illuminated or illuminated

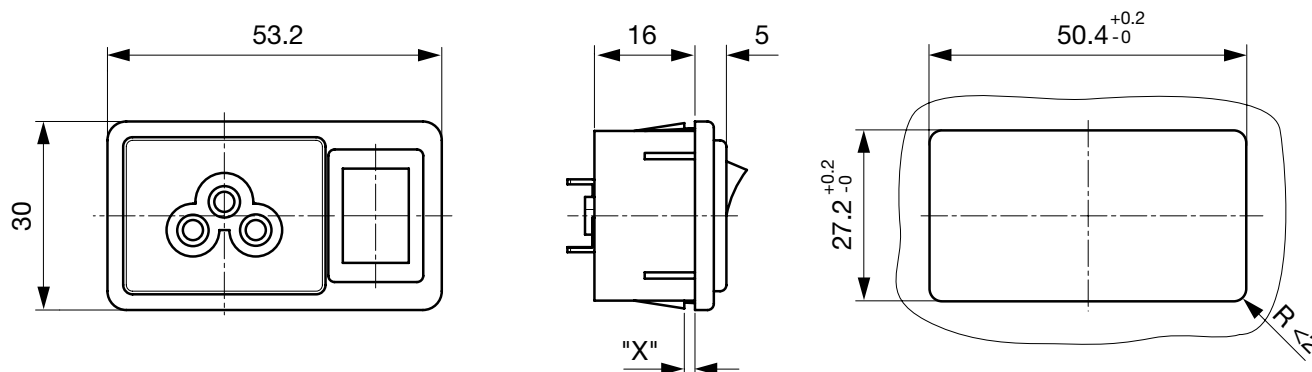
Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Mounting instruction](#), [Detailed request for product](#)

Technical Data

Ratings IEC	2.5 A / 250 VAC; 50 Hz
Ratings UL/CSA	2.5 A / 250 VAC; 60 Hz
Dielectric Strength	> 3 kVAC between L-N > 1.5 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder, Quick Connect or PCB Terminal
Panel Thickness s	Snap-in: 1/1.5/2/2.5/3 mm
Material: Housing	PA6, black, UL 94V-0

Appliance Inlet	C6 acc. to IEC 60320 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 2.5 A, Protection Class I
Line Switch	Rocker switch 1 or 2 pole, non-illuminated or illuminated black, acc. to IEC 61058-1 Technical Details

Dimensions

Length of the terminal please find at the order code configuration table
Dimension "X" please ref. to table order code

Config. Code

2565-K - H - A B C N - D - E G P

The characters are placeholders for the correspondingly keys of selections from the key tables.

2565-K - **H** - A B C N - D - E G P = Type

Type	Configuration key
combination frame	K

2565-K - H - **A** B C N - D - E G P = Terminals

Terminal L		Configuration key
short solder terminal (L = 4.8 mm)		2
long solder terminal (L = 8.5 mm)		3
PCB-terminal (standard)		4
Blade terminal (2.8 x 0.8 mm)		7

2565-K - H - A **B** C N - D - E G P = Terminals

Terminal N	Configuration key
short solder terminal (L = 4.8 mm)	2
long solder terminal (L = 8.5 mm)	3
PCB-terminal (standard)	4
Blade terminal (2.8 x 0.8 mm)	7

Symbols similar as in table A

2565-K - H - A B **C** N - D - E G P = Terminals

Terminal Ground	Configuration key
short solder terminal (L = 4.8 mm)	2
long solder terminal (L = 8.5 mm)	3
PCB-terminal (standard)	4
Blade terminal (2.8 x 0.8 mm)	7

Symbols similar as in table A

2565-K - H - A B C **N** - D - E G P = Terminal Fuseholder

Terminal Fuseholder	Configuration key

2565-K - H - A B C N - **D** - E G P = Color

Color	Configuration key
Black	A

2565-K - H - A B C N - D - **E** G P = Style

Style	Configuration key
snap-in (x=panel thickness)	4

2565-K - H - A B C N - D - E **G** P = Dimension X

Dimension "X"	Configuration key
15	

The dimension "X" is displayed in ($\frac{1}{10}$ mm). This information is also valid for the order code2565-K - H - A B C N - D - E G **P** = Switches

Switches	Configuration key
unipolar switch, 4,8mm blade terminal, black rocker	2
unipolar switch, solder terminal, black rocker	3
bipolar switch, 4,8mm blade terminal, black rocker	4
bipolar switch, solder terminals, black rocker	5
bipolar switch, 4,8mm blade terminal, rocker red illuminated	6
bipolar switch, solder terminal, rocker red illuminated	7
bipolar switch, 4,8mm blade terminals, rocker green illuminated	8
bipolar switch, solder terminals, rocker green illuminated	9

Packaging unit

50 Pcs