
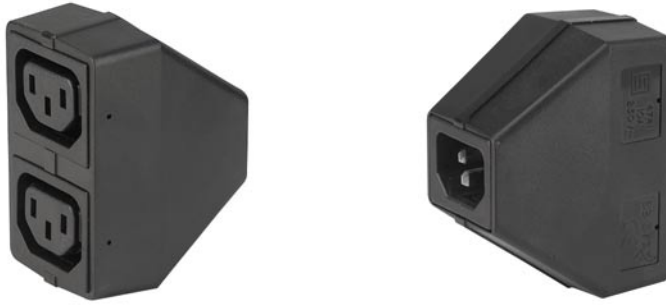


Distribution Unit with 1 IEC Appliance Inlet C14 and 2 Appliance Outlets F, Shuttered

**Description**

- Stand alone module
- 1 Function:  
of 2 outlets, Pin temperature 70 °C, Protection class I, shuttered



**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Mounting instruction](#), [Detailed request for product](#)


**Technical Data**

|                           |                                                                    |
|---------------------------|--------------------------------------------------------------------|
| Ratings IEC               | 10A / 250VAC; 50Hz                                                 |
| Ratings UL/CSA            | 10A / 250VAC; 60Hz                                                 |
| Dielectric Strength       | > 2.5kVAC between L-N<br>> 2.5kVAC between L/N-PE<br>(3 sec/50 Hz) |
| Allowable Operation Temp. | -25°C to 70°C                                                      |
| Protection Class          | Suitable for appliances with protection class I acc. to IEC 61140  |
| Material: Housing         | Thermoplastic, black, UL 94V-0                                     |

|                                    |                                                                                                                                                  |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Appliance Inlet / Appliance Outlet | C14 acc. to IEC 60320,<br>/ F acc. to IEC 60320,<br>UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|

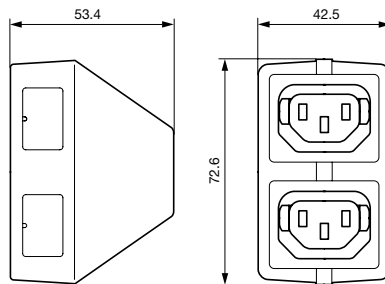**Dimensions**

Shutter operation:  
shutters opened by plug insertion



Shutter operation:  
shutters closed when plug is removed

**Variants**

| Type | Order Number |
|------|--------------|
| 4741 | 4741.0000    |

**Packaging unit** 50 Pcs

## Mating Inlets/Plugs

## Category / Description

## Plug Overview complete



|                                                                               |      |
|-------------------------------------------------------------------------------|------|
| IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm | 4732 |
| IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 8.5 mm   | 4733 |
| IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm  | 4735 |
| IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm    | 4736 |
| IEC Plug E, Cord Connector (Rewireable), Straight                             | 9009 |
| Plug further types to 4741                                                    | ...  |

## Mating Outlets/Connectors

## Appliance Outlet Overview complete



|                                                                                                   |      |
|---------------------------------------------------------------------------------------------------|------|
| IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal                            | 4787 |
| IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal            | 4788 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal | 5091 |

Appliance Outlet further types to 4741

## Connector Overview complete



|                                          |        |
|------------------------------------------|--------|
| IEC Connector C15A, Rewireable, Straight | 0102   |
| IEC Connector C15A, Rewireable, Straight | 0102-G |
| IEC Connector C15A, Rewireable, Angled   | 0112   |
| IEC Connector C13, Rewireable, Angled    | 4012   |
| IEC Connector C13, Rewireable, Straight  | 4022   |

Connector further types to 4741



## Power Supply or Interconnection Cord Overview complete

|                                                     |                |
|-----------------------------------------------------|----------------|
| Diverse Power Supply and Interconnection Cords 10 A | Cord Sets 10 A |
|-----------------------------------------------------|----------------|

Power Supply or Interconnection Cord further types to 4741