

IEC Appliance Inlet C20 with Circuit Breaker TA35 1-pole

V-Lock



C20



70° C

**Description**

- Panel Mount:
Snap-in version from front side
- 2 Functions:
Appliance Inlet, Protection class I, Circuit breaker type TA35, 1-pole
- Quick connect terminals 6.3 x 0.8 mm

Approvals

- VDE Certificate Number: 40025196
- UL File Number: E96454

Characteristics

- Unwired
- Switch non-illuminated or illuminated
Thermal overload protection
- Suitable for use in equipment according to IEC 60950

Other versions on request

- Pre-wired version
- Quick connect terminals 4.8 x 0.8 mm
- Protection class II, 70°C

References

Alternative: version for 10 A (15 A) 6135

Substitute for type 1624-K

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Mounting instruction](#), [Detailed request for product](#)


Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.

Technical Data

Ratings IEC	16 A / 250 VAC; 50 Hz
Ratings UL/CSA	20 A / 250 VAC; 60 Hz
Dielectric Strength	> 2.5 kVAC between L-N > 3 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 60 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Quick connect terminals 6.3 x 0.8 mm
Panel Thickness s	Snap-in: 1.5/2/2.5 mm
Material: Housing	Thermoplastic, black, UL 94V-0


Appliance Inlet	C20 acc. to IEC 60320, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16 A, Protection Class I
Circuit Breakers	Acc. IEC/EN 60934, UL 1077, CSA 22.2 no. 235 1-pole rocker switch, illuminated or non-illuminated. Conditional short circuit Inc: 2000 A

Dimensions

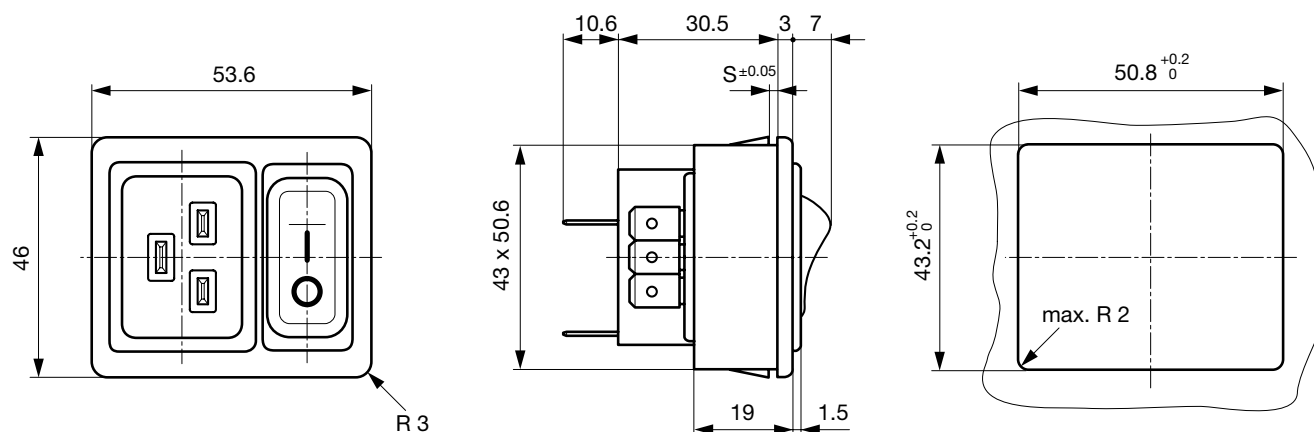


Diagrams

non illuminated



1) Line
2) Load

illuminated (connection N' to L)

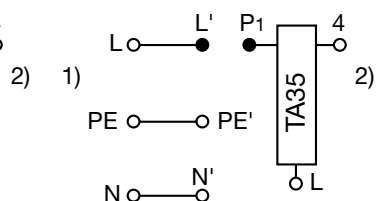

1) Line
2) Load

ORDER CODE

Number of switched poles Number of protected poles		1-pole 1	
Switch	without illumination	CFT	
Switch	illuminated	240 V 120 V	C2F C4F

Other versions on request

Table 1 Selection for type TA35

Order example

TA35- CFT W F 120 C0

No other features

Colours

	Switch front	Rocker non-illuminated	illuminated
W	black	white	—
B	black	black	—
3	black	—	red transparent
4	black	—	green transparent
6	black	—	orange transparent


Other colours on request

Rocker legend

	Surface	Illustration	Colour of print
F	embossed	— 0	
H	printed	ON OFF	white
K	printed	ON OFF	black
L	printed	— 0	white
M	printed	— 0	black

Other legends on request

Position of the rocker legend e.g. F

Rated current I_n (A)

I_n	Code	I_n	Code
1,0	J10	8,0	080
2,0	J20	10,0	100
4,0	040	12,0	120
5,0	050	15,0	150
6,0	060	16,0	160
		20,0	200*


Other rated currents on request

*) UL / CSA only


Technical data (continued)

Circuit breaker

Tripping characteristics

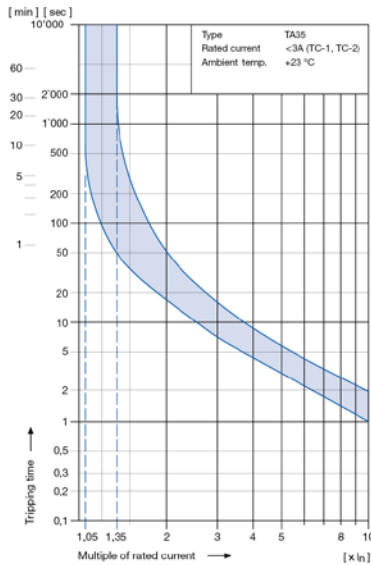 $I_n < 3 \text{ A}$ 

Tripping characteristics

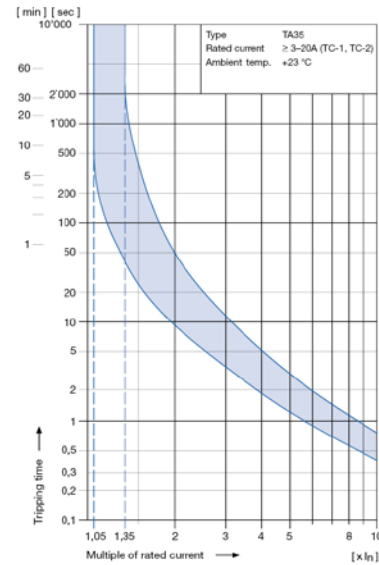 $I_n \geq 3 \dots 20 \text{ A}$ 

Effect of ambient temperature

The unit is calibrated for an ambient temperature of +23 °C. To determine the rated current for lower or higher ambient temperature, use a correction factor from the table below.

* Ambient temperature [°C] Correction factor

-25	0.79
-20	0.81
0	0.90
+23	1.00
+40	1.03
+50	1.04
+60	1.06

* Temperature must be measured at the rear of the breaker next to the terminals after equipment operating temperature has been reached.

Example:

Rated current at +23 °C

10 A

Ambient temperature

+60 °C

Correction factor

1.06

Chosen rated current at +60 °C ambient temperature:

10 A x 1.06 = 10.6 A

Order code (Order example)

Type	Order code TA35
6136	C F T W F 1 2 0 C 0
	see table 1

. 0 2 1 0

Wiring

1 wired (only on request)
0 unwired

Terminals

1 Quick connect 6.3 x 0.8 mm

Mounting

2 Snap-in s = 1.5 mm
3 Snap-in s = 2.0 mm
4 Snap-in s = 2.5 mm

0 Protection class 1

Please note that Schurter will establish an internal part number for logistics use in addition to the order code. The format of this internal part number is, for example: 6136.xxxx.xxxx

Packaging unit 15 Pcs**Mating Outlets/Connectors****Category / Description**[Connector Overview complete](#)

IEC Connector C19, Rewireable, Straight	0104U
IEC Connector C19, Rewireable, Angled	4790
IEC Connector C19, Rewireable, Straight	4795

[Connector further types to 6136](#)[Power Supply Cord Overview complete](#)

EU Power Supply Cord with IEC Connector C19, straight/ angled	6004.0395
US Power Supply Cord with IEC Connector C19, straight	6009.5195

[Power Supply Cord further types to 6136](#)