

Inline Fuseholder, 5x20 / 6.3x32 mm

new



5x20 mm with wire leads, 8601.2001.08 5x20 mm, 8601.2000

6.3x32 mm, 8601.2005

32 VAC · 2.5 W / 6.3 A · 32 VDC

**Description**

- Inline Fuseholder

Applications



- Automotive applications/aftermarket
- Audio aftermarket
- Lighting aftermarket

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

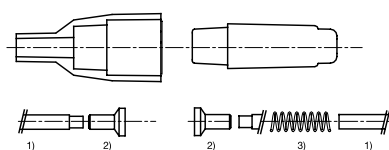
Technical Data

Shock-Safe Category	PC2
Fuse-Link	5 x 20 or 6.3 x 32 mm
Mounting	In-line
Terminal	Wires
Rated Voltage	32 VAC , 32 VDC
Rated current	6.3 A
Rated Power Acceptance IEC	2.5 W / 6.3 A @ Ta 23 °C
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to +85 °C
Material: Socket	Thermoplastic, UL 94V-0
Material: Terminals	Tin-Plated Brass
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Dimensions

5x20 mm

6.3x32 mm

Mounting Instruction

Variants

Holder	Fuse-Link	Wire	Colour Wire	Length [mm]	Order Number
●	5 x 20mm	-	-	-	8601.2000
●	5 x 20mm	18 AWG	dark pink	200	8601.2001.08
●	6.3 x 32mm	-	-	-	8601.2005
●	6.3 x 32mm	14 AWG	pink	200	8601.2005.08

Wire Length: 8"

Packaging Unit

Bulk (50 pcs.)