

FO-50360-L

4

3

2


1

HONEYWELL
PART NUMBER

V15H16-CZ100A03-K

PRODUCT CODE
CWF2020

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

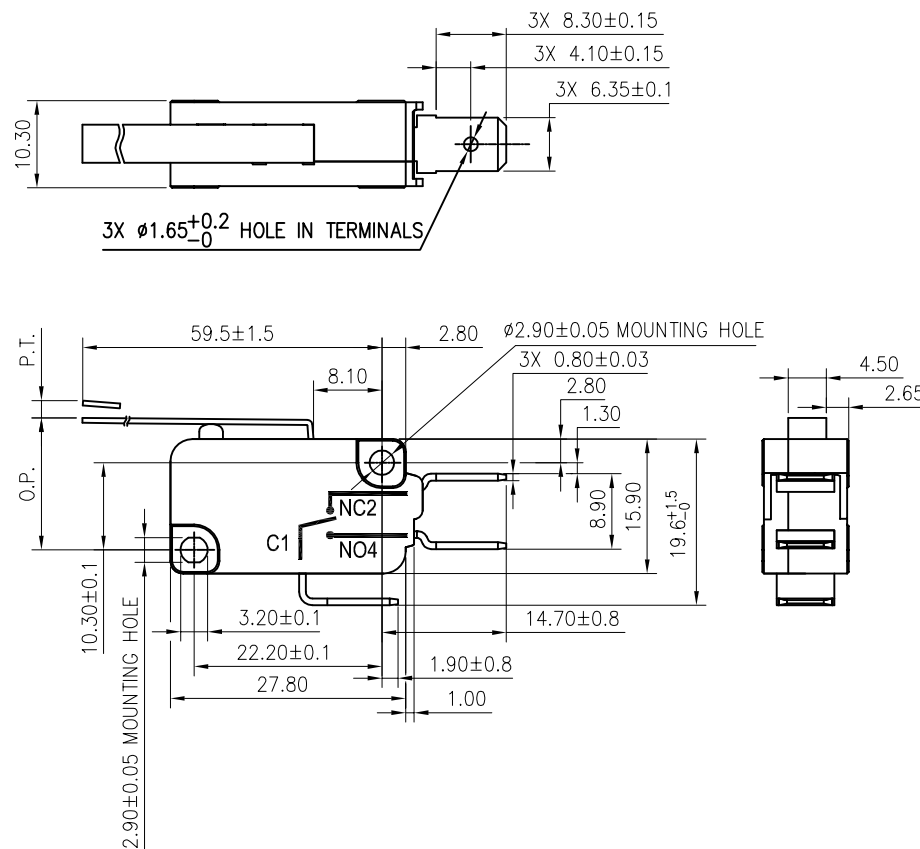

NOTES:

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN		KSR		03DEC07		Honeywell									
OPERATING FORCE: 30gf MAX.		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK		RJ		03DEC07											
DIFFERENTIAL FORCE: 5gf MIN.		 16(4)A 250V~ 25T150 μ 5E4		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.						TITLE									
RELEASE FORCE: 5gf MIN.				ONE PLACE .X ± -																	
FREE POSITION: 15.3±3MM.				 16A 1/2HP 125/250VAC		TWO PLACE .XX ± 0.40		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY													
OPERATING POSITION: 6.4MM MAX.						THREE PLACE .XXX ± -															
PRE-TRAVEL: 2.4MM MAX.				ANGLES X ± 2°		AutoCAD						SWITCH - BASIC									
DIFFERENTIAL TRAVEL: 2.4MM MAX.				THIRD ANGLE PROJECTION																	
OVER-TRAVEL: 2.6MM MIN.												SIZE		TYPE		CAGE CODE		DRAWING NAME		REV	
FULL OVERTRAVEL FORCE:												B		I				V15H16-CZ100A03-K		B	
												SCALE		—				SHEET		1 OF 1	