
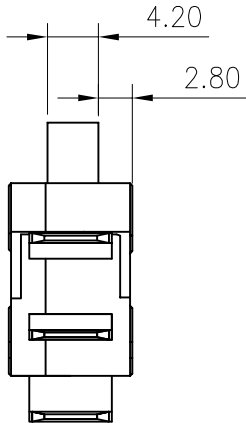
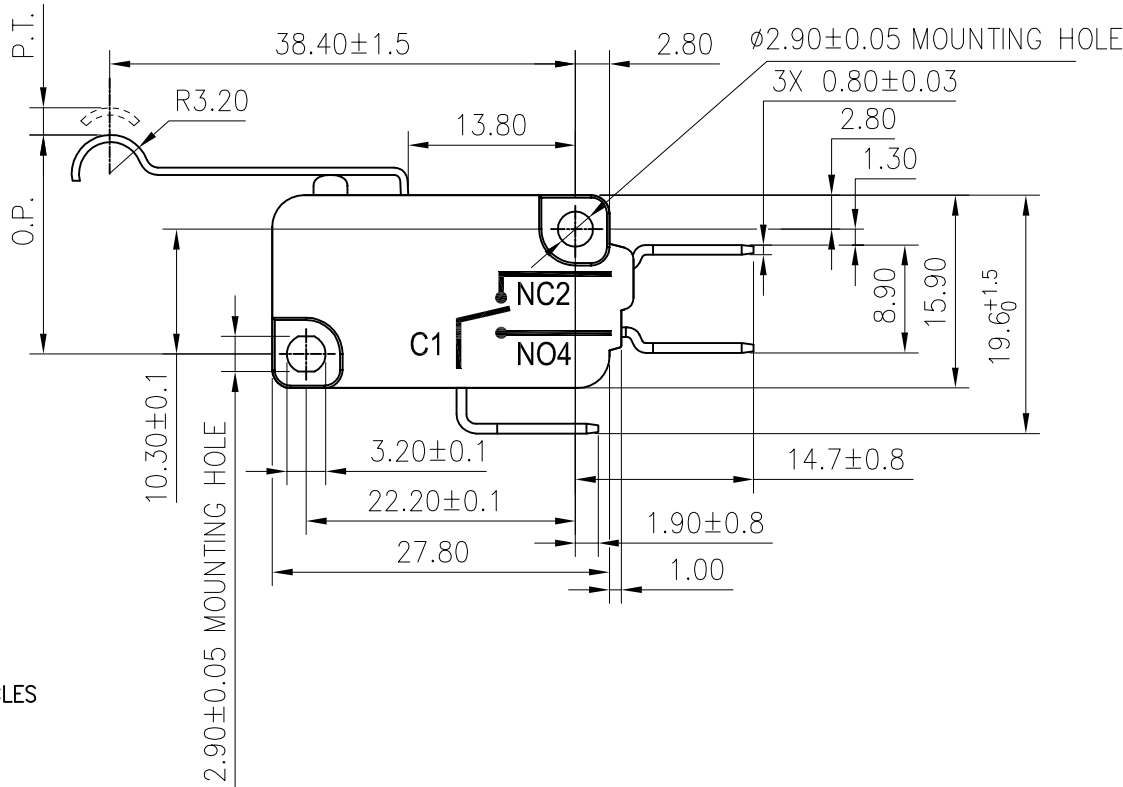



HONEYWELL PART NUMBER
V15H16-CZ200B04-K
PRODUCT CODE CWF2021

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

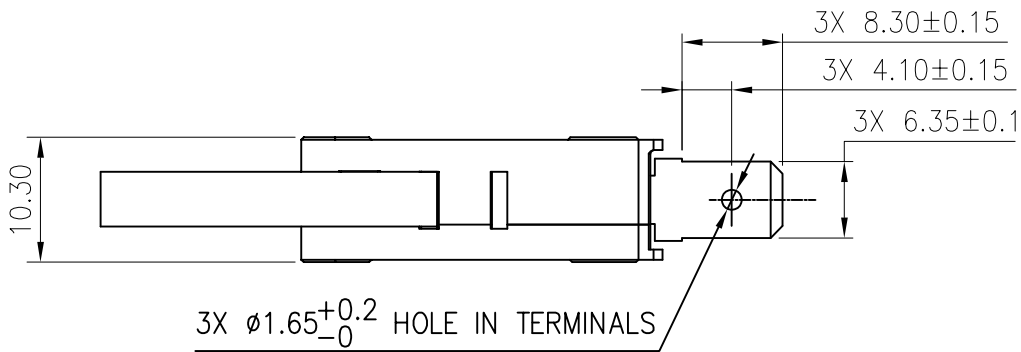

NOTES:

1. TERMINALS WILL ACCEPT 6.35 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN		KSR		03DEC07		Honeywell						
OPERATING FORCE: 70gf MAX.		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK		RJ		03DEC07								
DIFFERENTIAL FORCE:		 16(4)A 250V~ 25T150 μ 5E4  16A 1/2HP 125/250VAC		NO PLACE		X	±	±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.									
RELEASE FORCE:				ONE PLACE		.X	±	±										
FREE POSITION:				TWO PLACE		.XX	±	± 0.40										
OPERATING POSITION:				THREE PLACE		.XXX	±	±	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY									
PRE-TRAVEL:				ANGLES		X	±	± 2°										
DIFFERENTIAL TRAVEL:		THIRD ANGLE PROJECTION					AutoCAD				SCALE		—		SHEET		1 OF 1	
OVER-TRAVEL:							B		I		CAGE CODE		DRAWING NAME		REV			
FULL OVERTRAVEL FORCE:							V15H16-CZ200B04-K		B									