


REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVR 15MAY08	ASD

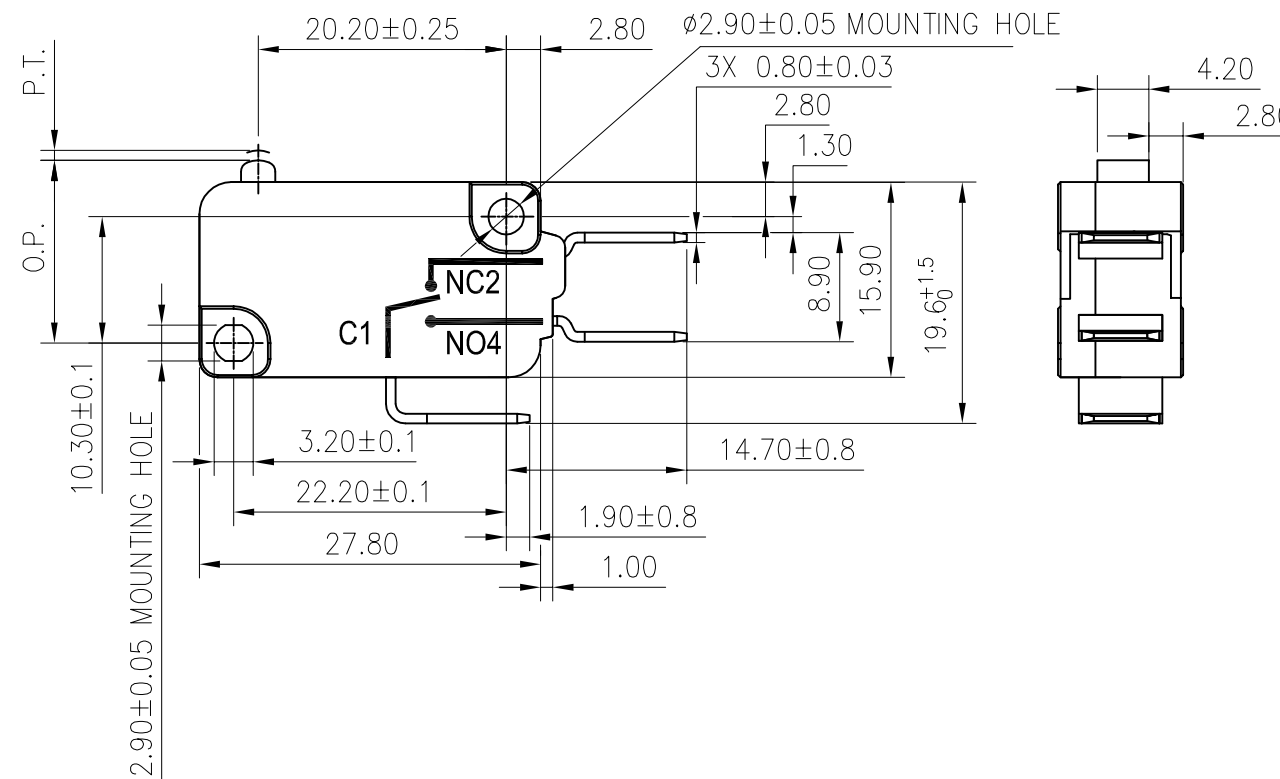

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:		DRAWN	KSR	03DEC07	Honeywell					
OPERATING FORCE: 400gf MAX. DIFFERENTIAL FORCE: RELEASE FORCE: 100gf MIN. FREE POSITION: OPERATING POSITION: 14.7±0.5MM. PRE-TRAVEL: 1.6MM MAX. DIFFERENTIAL TRAVEL: 0.4MM MAX. OVER-TRAVEL: 0.8MM MIN. FULL OVERTRAVEL FORCE:		CONTACT ARRANGEMENT S.P.D.T				CHECK	RJ	03DEC07						
17 CQC 16(4)A 250V~ 25T150 μ 5E4 16A 1/2HP 125/250VAC		NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± 0.40 THREE PLACE .XXX ± ANGLES X ± 2° THIRD ANGLE PROJECTION		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC							
				INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY										
								AutoCAD			SIZE	TYPE	CAGE CODE	DRAWING NAME
							B	I		V15H16-CZ400-K		B		
							SCALE		—			SHEET	1 OF 1	