


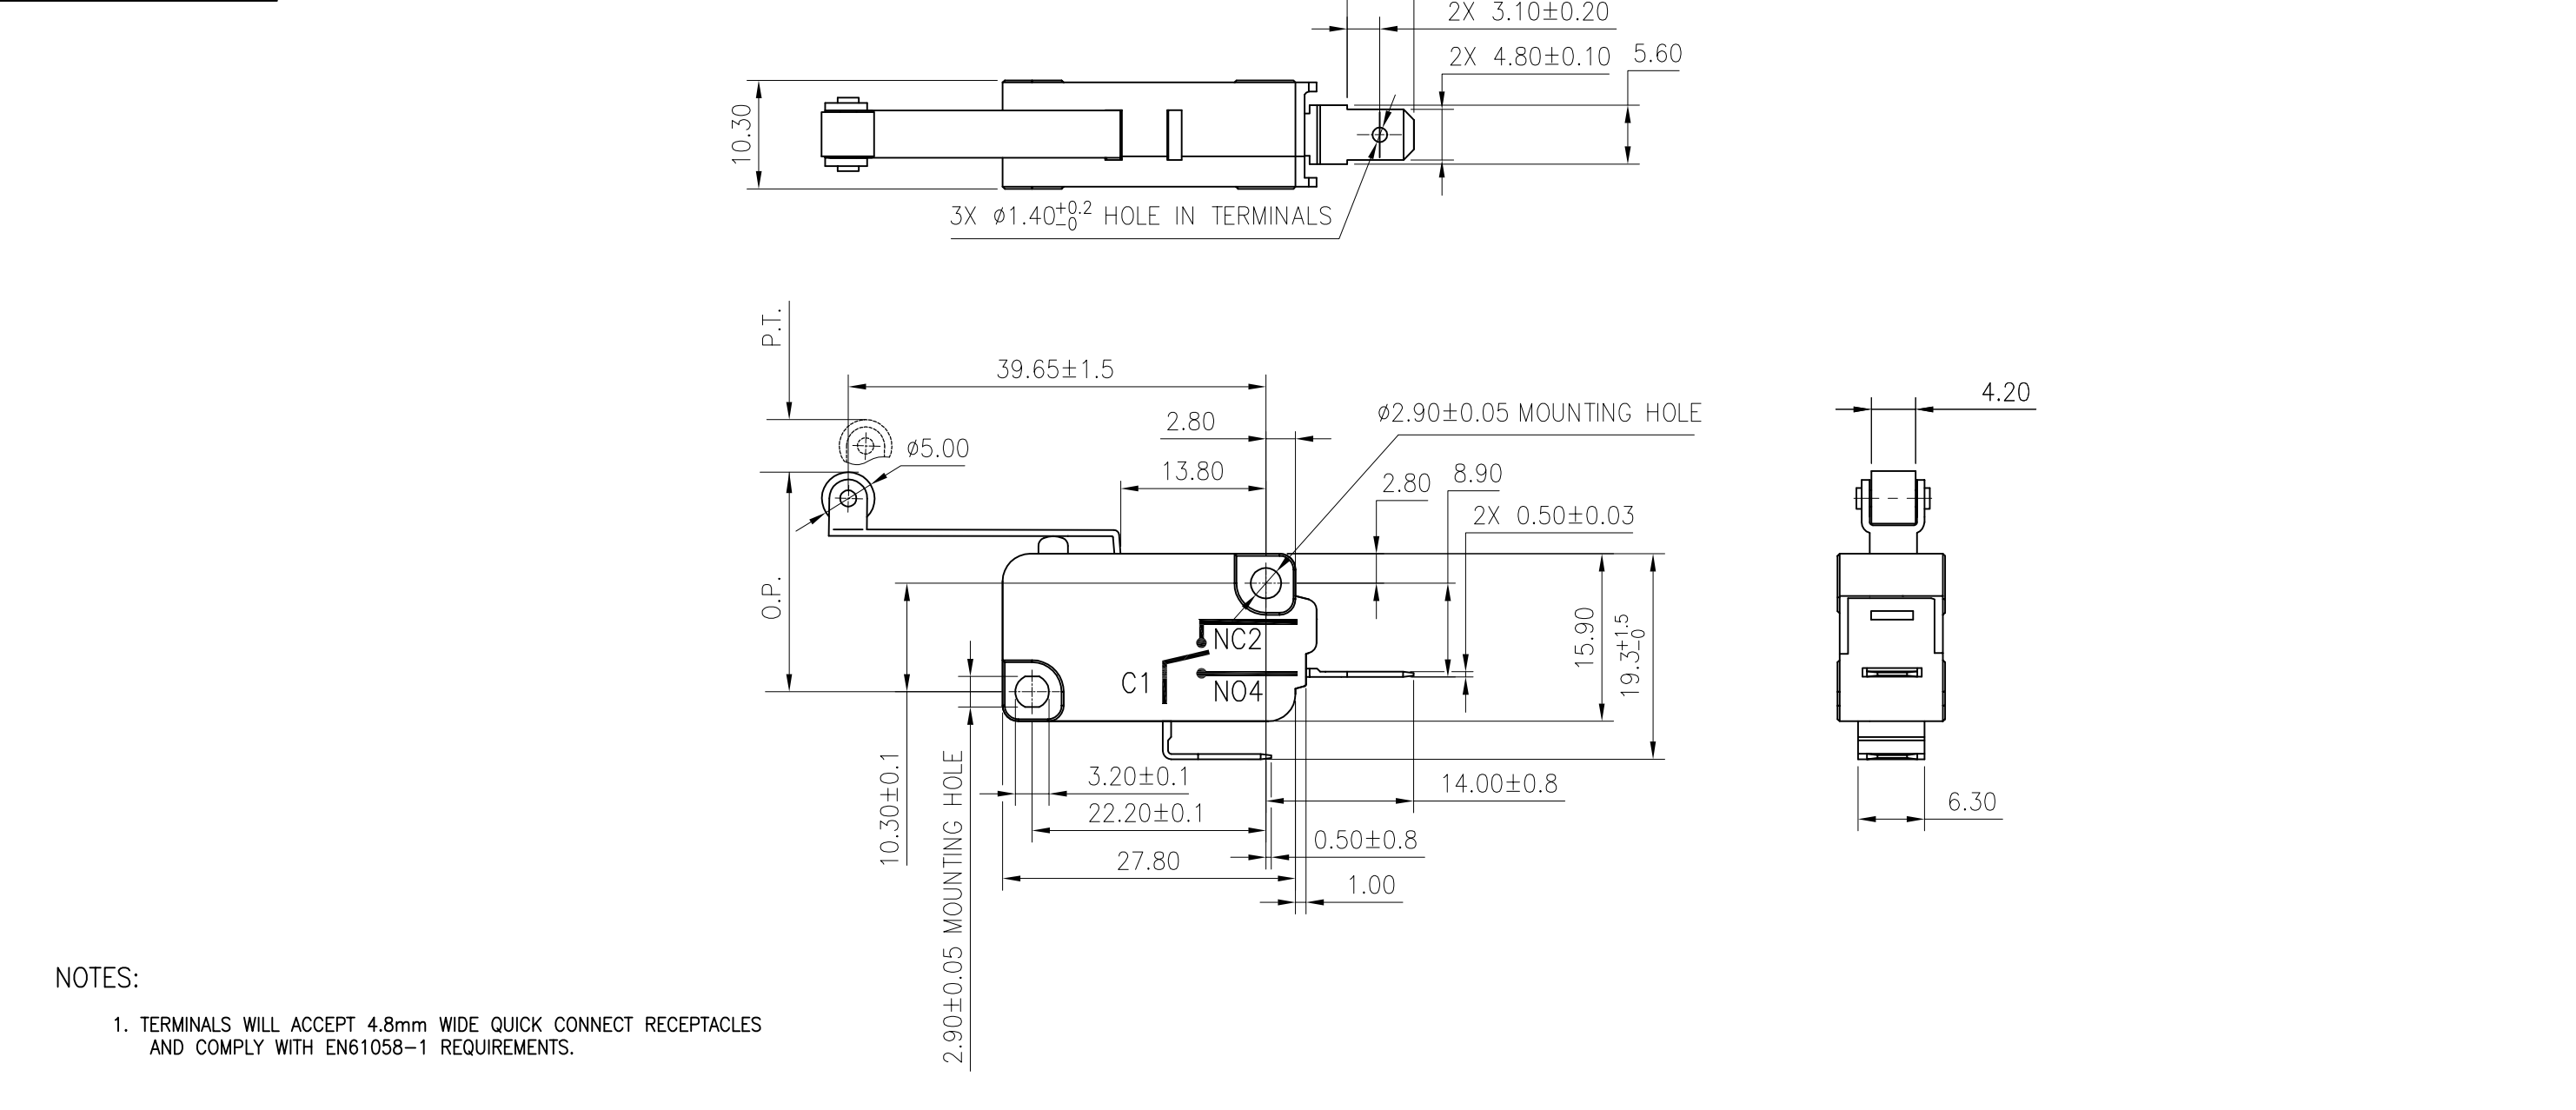

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:		DRAWN		KSR		03DEC07		Honeywell									
CONTACT ARRANGEMENT S.P.N.O		  16A 1/2HP 125/250VAC				CHECK		RJ		03DEC07								TITLE			
OPERATING FORCE: 65gf MAX.				NO PLACE X ± - ONE PLACE .X ± - TWO PLACE .XX ± 0.40 THREE PLACE .XXX ± - ANGLES X ± 2°		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE		TYPE		CAGE CODE		DRAWING NAME		REV			
DIFFERENTIAL FORCE: 10gf MIN.										B		I				V15H16-EP200B06-K		B			
RELEASE FORCE: 10gf MIN.																					
FREE POSITION: 20.6±2.2MM.																					
PRE-TRAVEL: 6.0MM MAX.																					
DIFFERENTIAL TRAVEL: 1.6MM MAX.																					
OVER-TRAVEL: 2.2MM MIN.																					
FULL OVERTRAVEL FORCE:																					