

FO-50360-L

4

3

2




1

HONEYWELL
PART NUMBER

V15H16-EP400A03-K

PRODUCT CODE
CWF2032

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

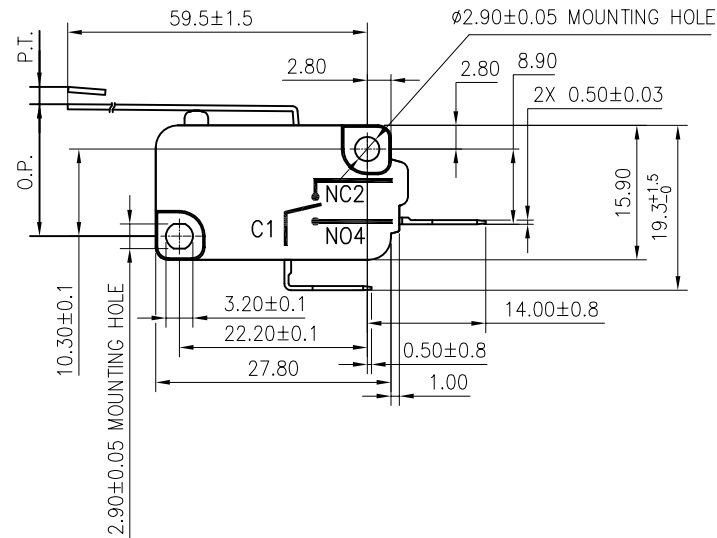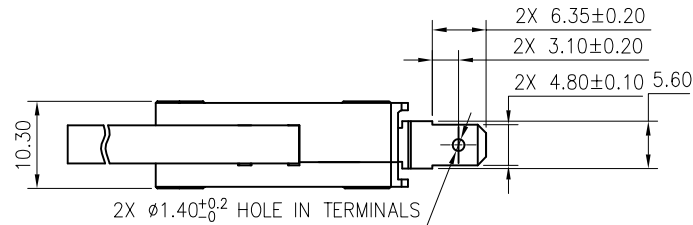

NOTES:

1. TERMINALS WILL ACCEPT 6.35 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN		KSR		03DEC07		Honeywell					
OPERATING FORCE: 130gf MAX.		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK		RJ		03DEC07							
DIFFERENTIAL FORCE: _____		 16(4)A 250V~ 25T150 μ 5E4  16A 1/2HP 125/250VAC		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		TITLE SWITCH - BASIC							
RELEASE FORCE: 30gf MIN.				ONE PLACE .X ± -													
FREE POSITION: _____				TWO PLACE .XX ± 0.40													
OPERATING POSITION: 15.3±3MM.				THREE PLACE .XXX ± -													
PRE-TRAVEL: 6.4MM MAX.				ANGLES X ± 2°													
DIFFERENTIAL TRAVEL: 2.4MM MAX.				THIRD ANGLE PROJECTION		AutoCAD		SIZE B		TYPE I		CAGE CODE		DRAWING NAME V15H16-EP400A03-K		REV B	
OVER-TRAVEL: 2.6MM MIN.								SCALE		—		SHEET		1 OF 1			
FULL OVERTRAVEL FORCE: _____																	

4

3

2

1