FO-50360-L

HONEYWELL PART NUMBER
V15H16-EZ200B02-K
PRODUCT CODE CWF2019

REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

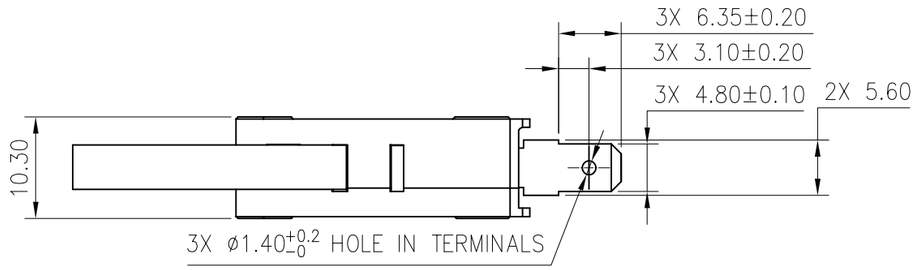

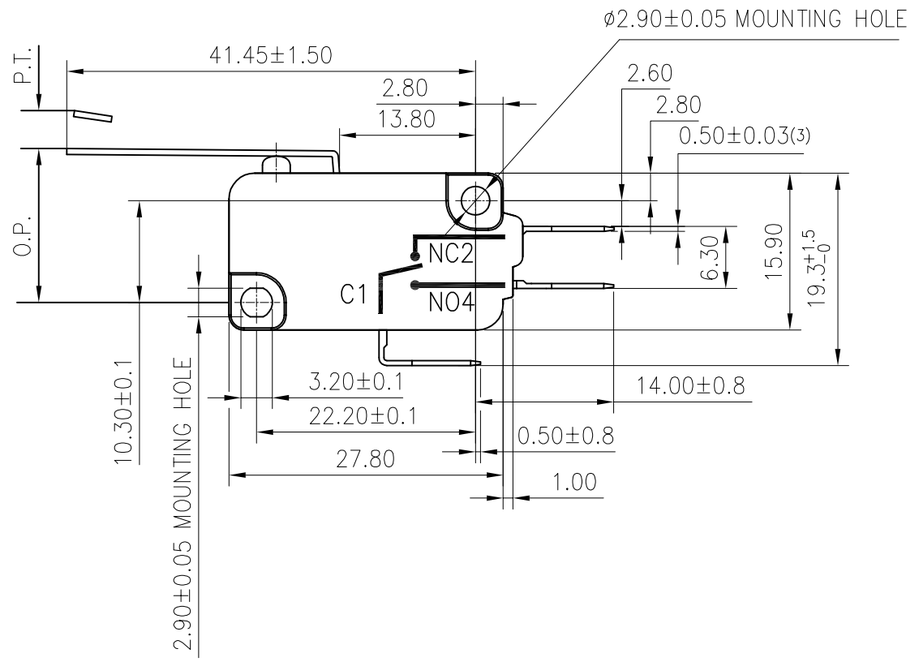

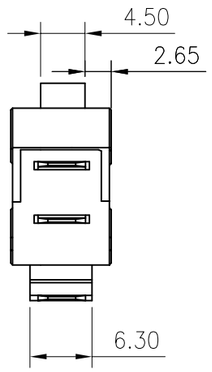

NOTES:

1. TERMINALS WILL ACCEPT 4.8mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS	
OPERATING FORCE:	65gf MAX.
DIFFERENTIAL FORCE:	
RELEASE FORCE:	15gf MIN.
FREE POSITION:	
OPERATING POSITION:	15.3±2.5MM.
PRE-TRAVEL:	6.0MM MAX.
DIFFERENTIAL TRAVEL:	1.65MM MAX.
OVER-TRAVEL:	2.2MM MIN.
FULL OVERTRAVEL FORCE:	

ELECTRICAL DATA

CONTACT ARRANGEMENT
S.P.D.T

16(4)A 250V~
25T150 µ 5E4

16A 1/2HP 125/250VAC

DESIGN UNITS: MM
TOLERANCES UNLESS NOTED:

NO PLACE	X	± -
ONE PLACE	.X	± -
TWO PLACE	.XX	± 0.40
THREE PLACE	.XXX	± -
ANGLES	X	± 2°

THIRD ANGLE PROJECTION

DRAWN	KSR	03DEC07
CHECK	RJ	03DEC07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

AutoCAD

Honeywell

TITLE
SWITCH - BASIC

SIZE	TYPE	CAGE CODE	DRAWING NAME	REV
B	I		V15H16-EZ200B02-K	B

SCALE — SHEET 1 OF 1