


REV	DOCUMENT	CHANGED BY	CHECK
A	0040063	SS 27MAY08	BLR

HONEYWELL PART NUMBER
V15H22-CZ100A06-K
PRODUCT CODE
CFW2053

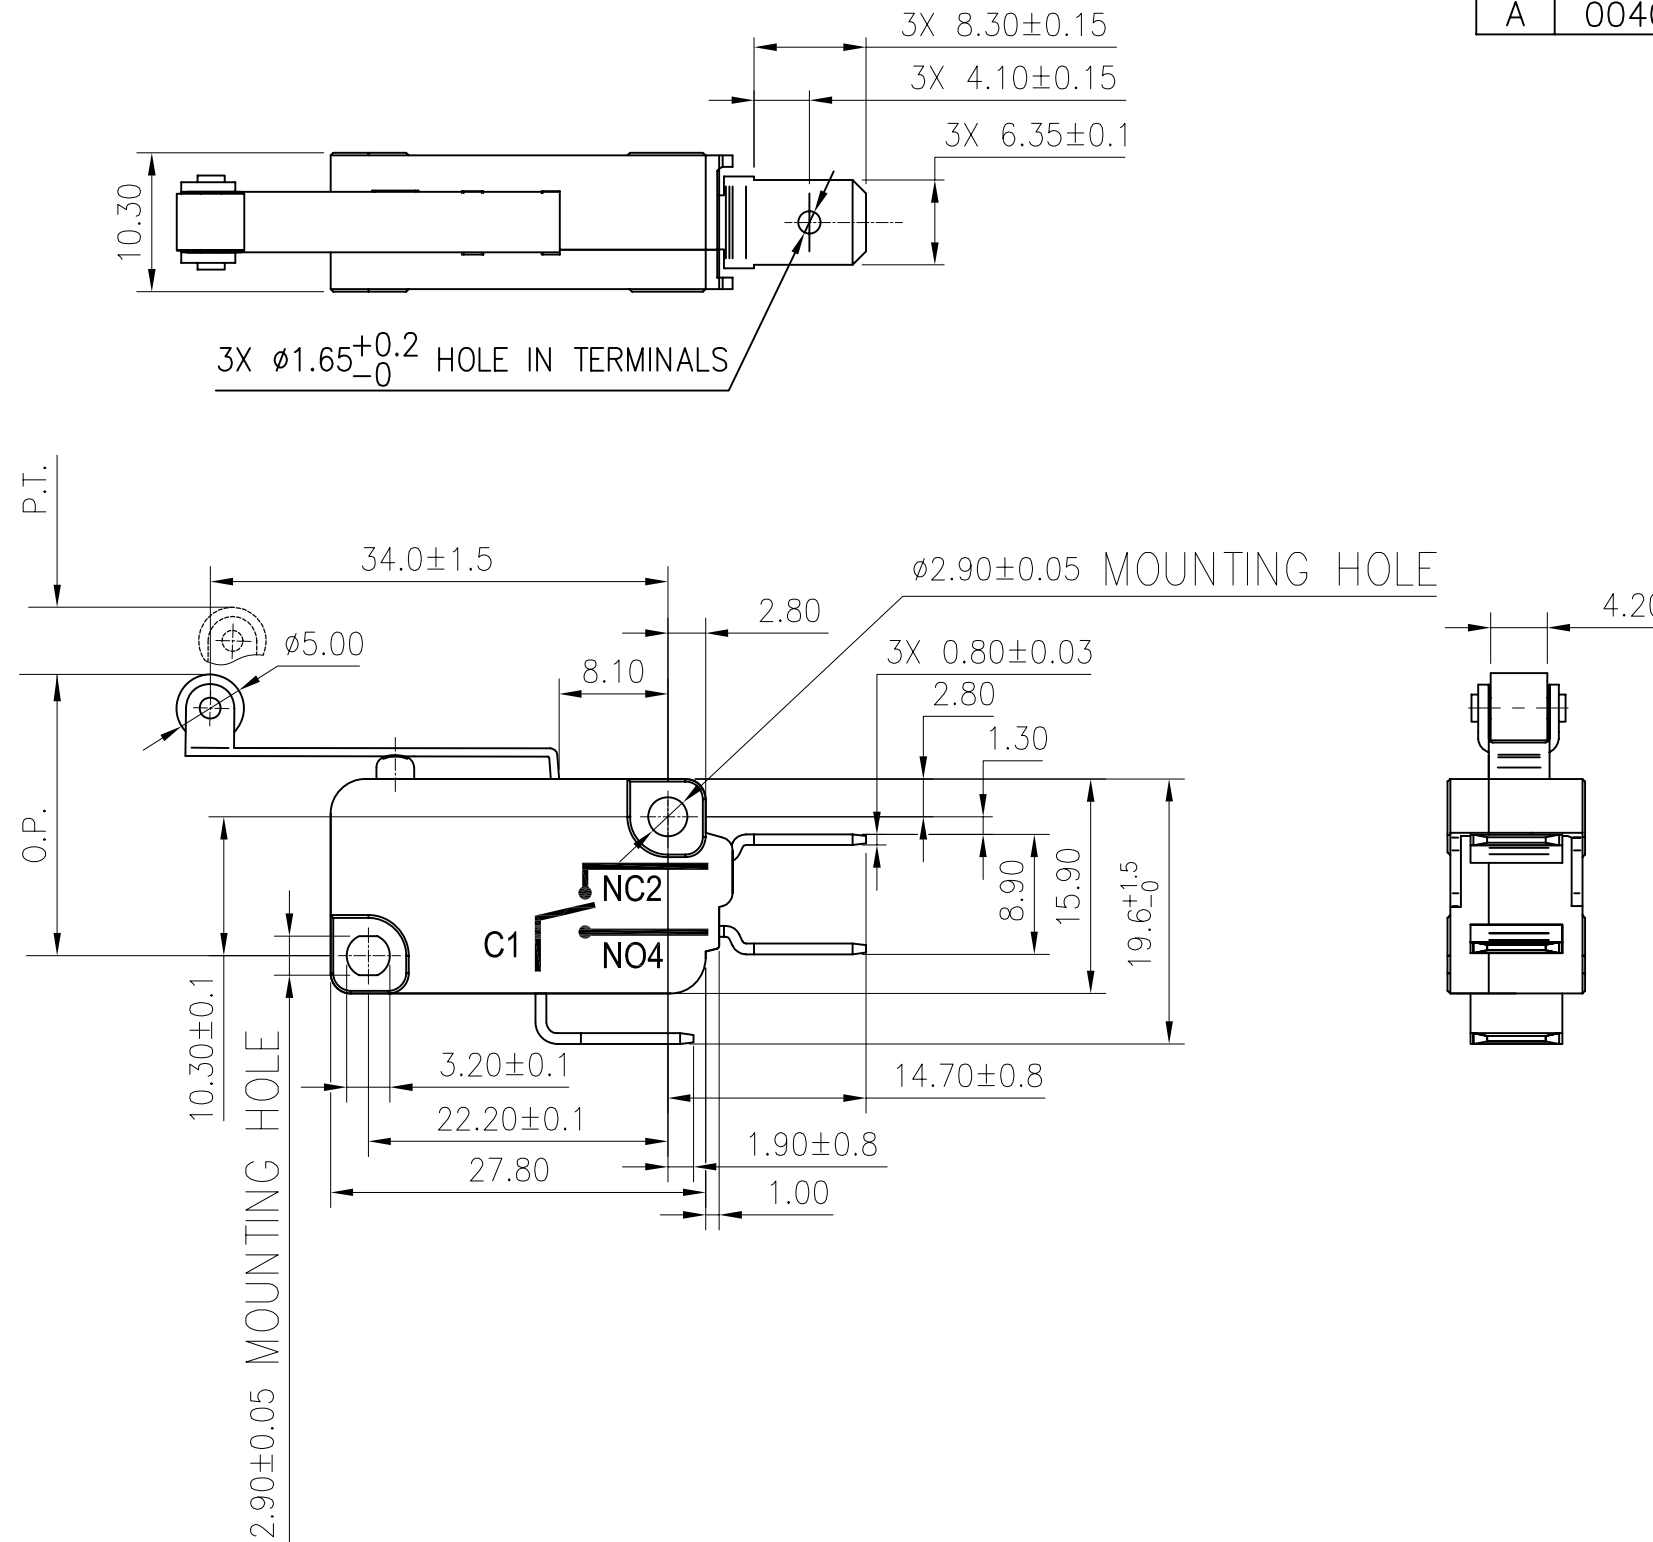

NOTES:

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN	KSR	26MAY08	Honeywell							
OPERATING FORCE: 60gf MAX.		CONTACT ARRANGEMENT S.P.D.T		TOLERANCES UNLESS NOTED:		CHECK	RJ	26MAY08								
DIFFERENTIAL FORCE:		E17 CQC 22(8)A 250V~ 25T150 μ RU® c RU® 22A 1HP 125/250VAC		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY								
RELEASE FORCE: 10gf MIN.				ONE PLACE .X ± -												
FREE POSITION:				TWO PLACE .XX ± 0.40												
OPERATING POSITION: 20.6±1.6MM.				THREE PLACE .XXX ± -												
PRE-TRAVEL: 3.2MM MAX.				ANGLES X ± 2°		AutoCAD		SCALE	NTS			SHEET	1	OF	1	
DIFFERENTIAL TRAVEL: 1.2MM MAX.								B	I		DRAWING NAME		V15H22-CZ100A06-K		REV	A
OVER-TRAVEL: 1.3MM MIN.																
FULL OVERTRAVEL FORCE:																