
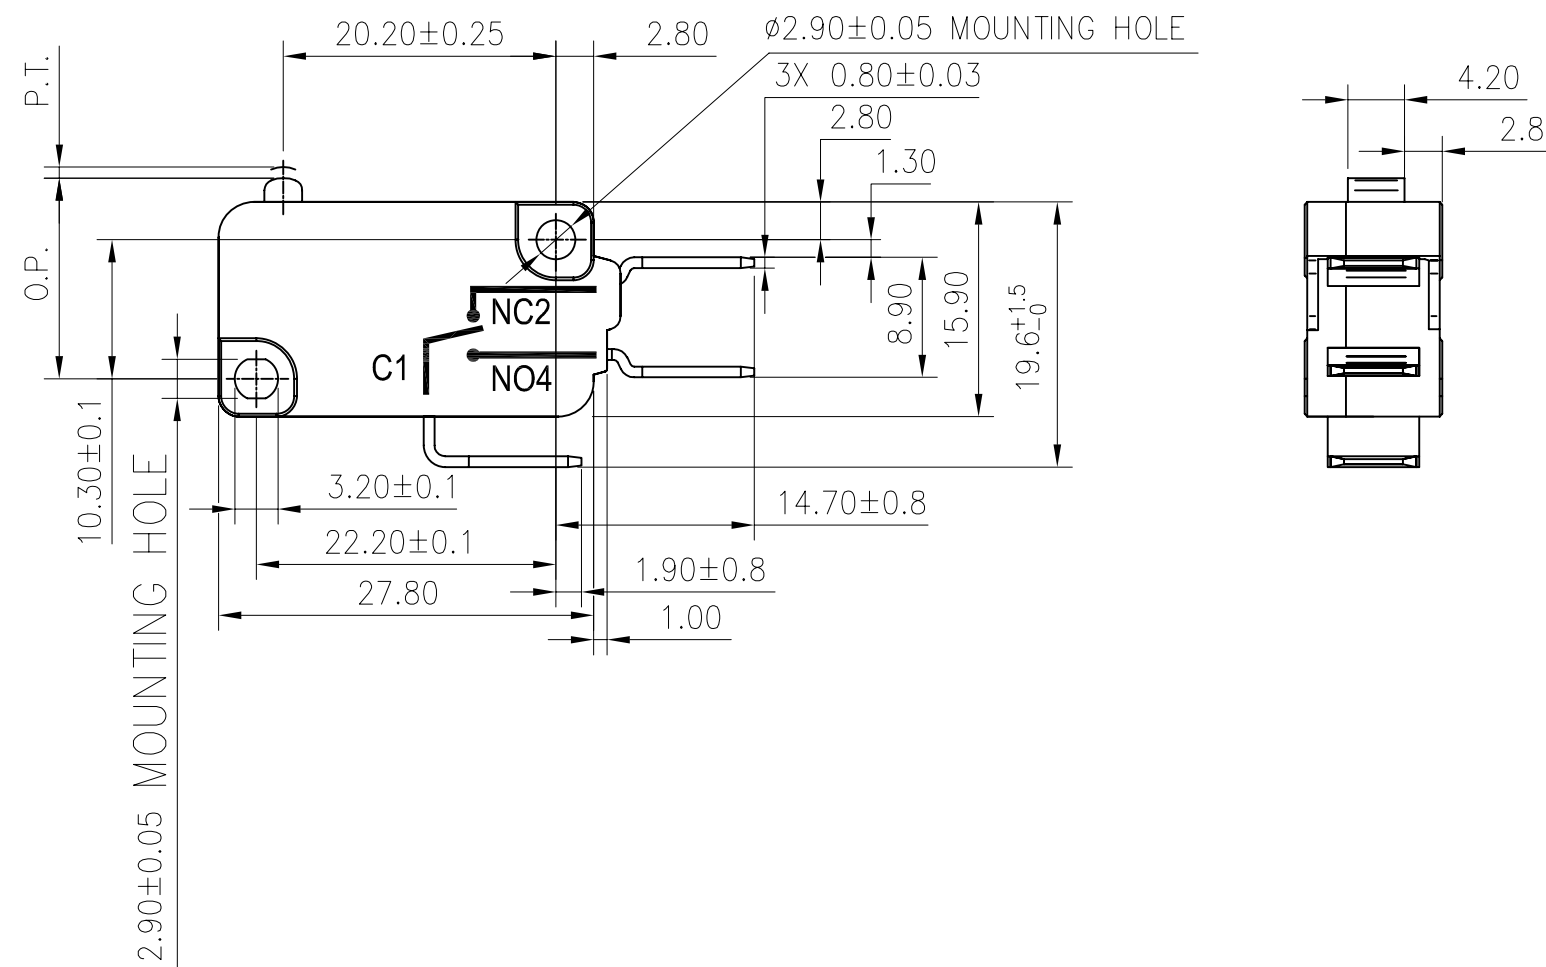


REV	DOCUMENT	CHANGED BY	CHECK
A	0040063	SS 27MAY08	BLR

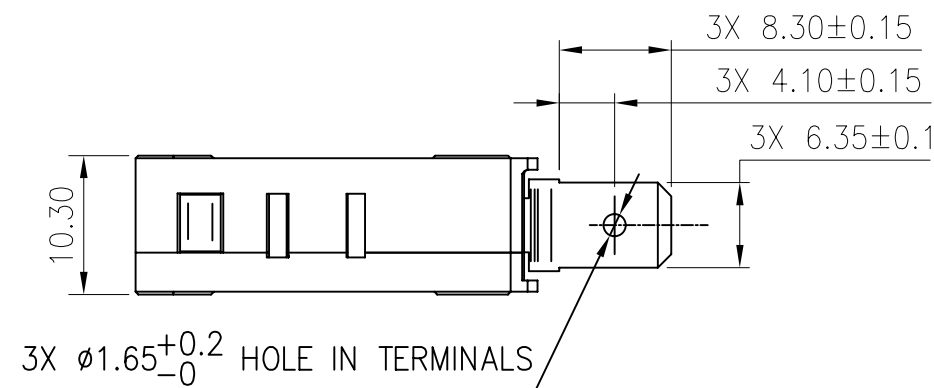

NOTES:

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		CONTACT ARRANGEMENT		DESIGN UNITS: MM		DRAWN	KSR	26MAY08	Honeywell									
OPERATING FORCE: 300gf MAX.		S.P.D.T		TOLERANCES UNLESS NOTED:		CHECK	RJ	26MAY08										
DIFFERENTIAL FORCE:		17 CCC 22(8)A 250V~ 25T150 μ RJ c RJ 22A 1HP 125/250VAC		NO PLACE	X	±	-	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE						
RELEASE FORCE: 75gf MIN.				ONE PLACE	.X	±	-											
FREE POSITION:				TWO PLACE	.XX	±	0.40	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE	DRAWING NAME		REV		
OPERATING POSITION: 14.7±0.5MM.				THREE PLACE	.XXX	±	-				B	I		V15H22-CZ300-K		A		
PRE-TRAVEL: 1.6MM MAX.				THIRD ANGLE PROJECTION							SCALE	NTS		SHEET		1	OF	1
DIFFERENTIAL TRAVEL: 0.4MM MAX.																		
OVER-TRAVEL: 0.8MM MIN.																		
FULL OVERTRAVEL FORCE:																		