
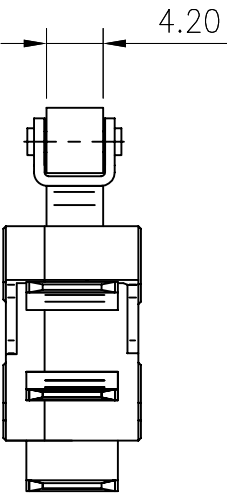
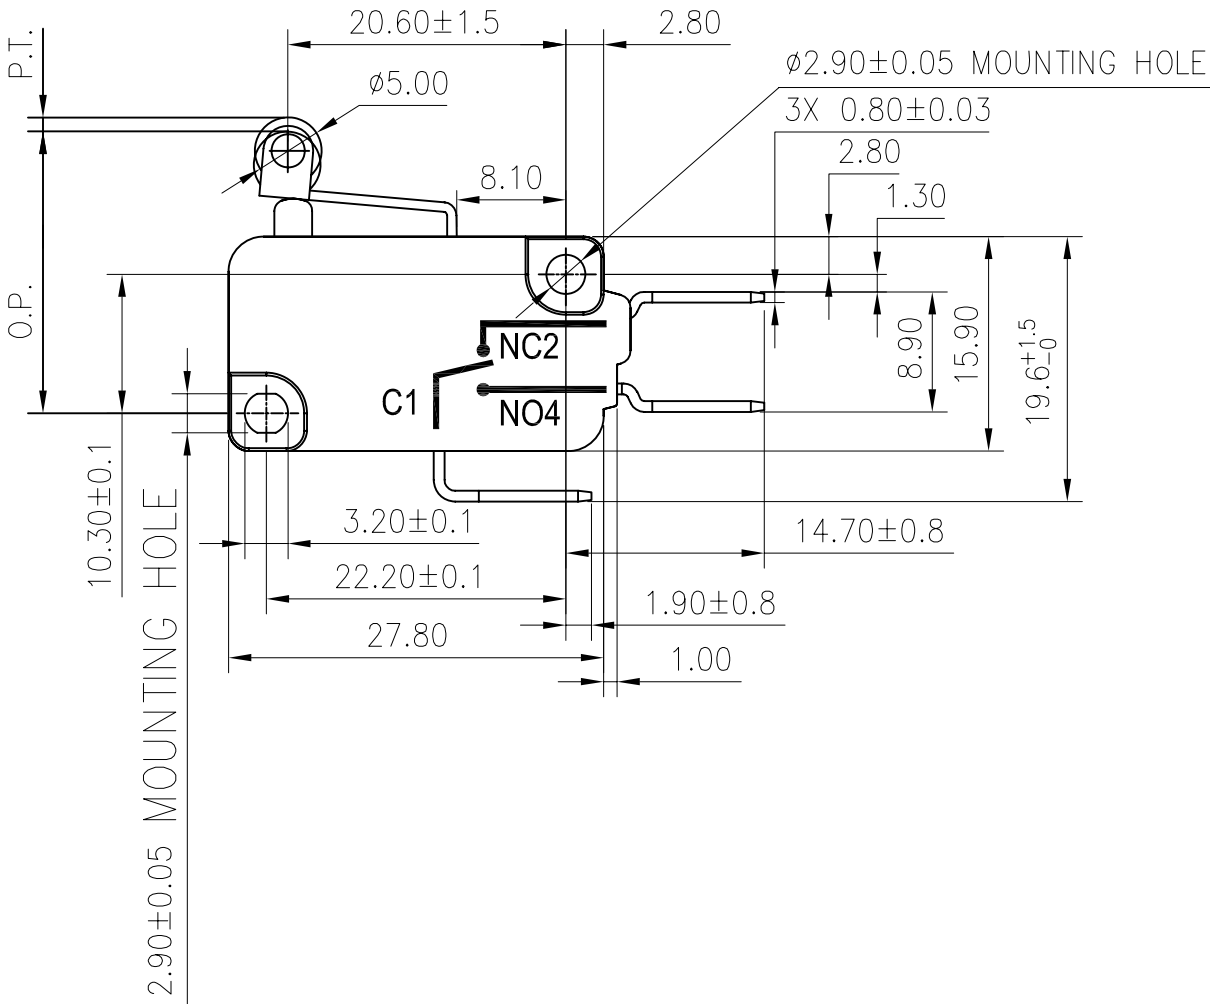


HONEYWELL PART NUMBER
V15H22-CZ300A05-K
PRODUCT CODE
CFW2071

REV	DOCUMENT	CHANGED BY	CHECK
A	0040063	SS 27MAY08	BLR

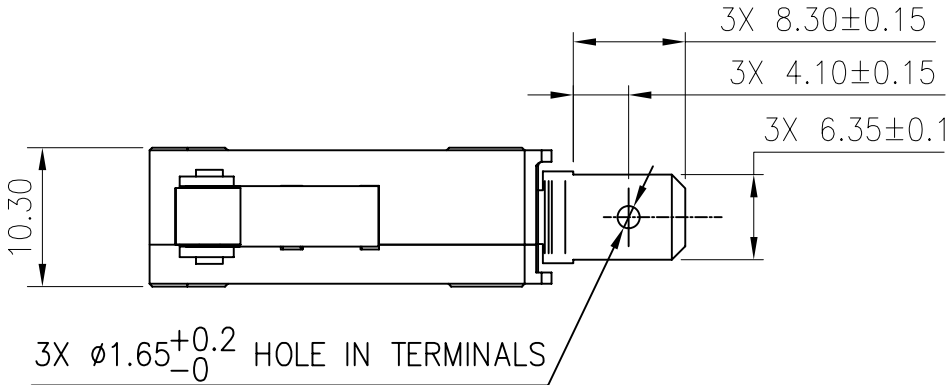

NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN	KSR	26MAY08	Honeywell									
		CONTACT ARRANGEMENT S.P.D.T		TOLERANCES UNLESS NOTED:		CHECK	RJ	26MAY08						TITLE				
OPERATING FORCE: 350gf MAX.		EN 17 CQC 22(8)A 250V~ 25T150 μ		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.												
DIFFERENTIAL FORCE:				ONE PLACE .X ± -														
RELEASE FORCE: 60gf MIN.		RJ cRJ 22A 1HP 125/250VAC		TWO PLACE .XX ± 0.40		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE	DRAWING NAME	REV					
FREE POSITION:				THREE PLACE .XXX ± -					B	I		V15H22-CZ300A05-K	A					
OPERATING POSITION: 20.6±0.8MM.				ANGLES X ± 2°		AutoCAD			SCALE		SHEET		1 OF 1					
PRE-TRAVEL: 1.6MM MAX.				THIRD ANGLE PROJECTION					NTS									
DIFFERENTIAL TRAVEL: 0.4MM MAX.																		
OVER-TRAVEL: 0.8MM MIN.																		
FULL OVERTRAVEL FORCE:																		