
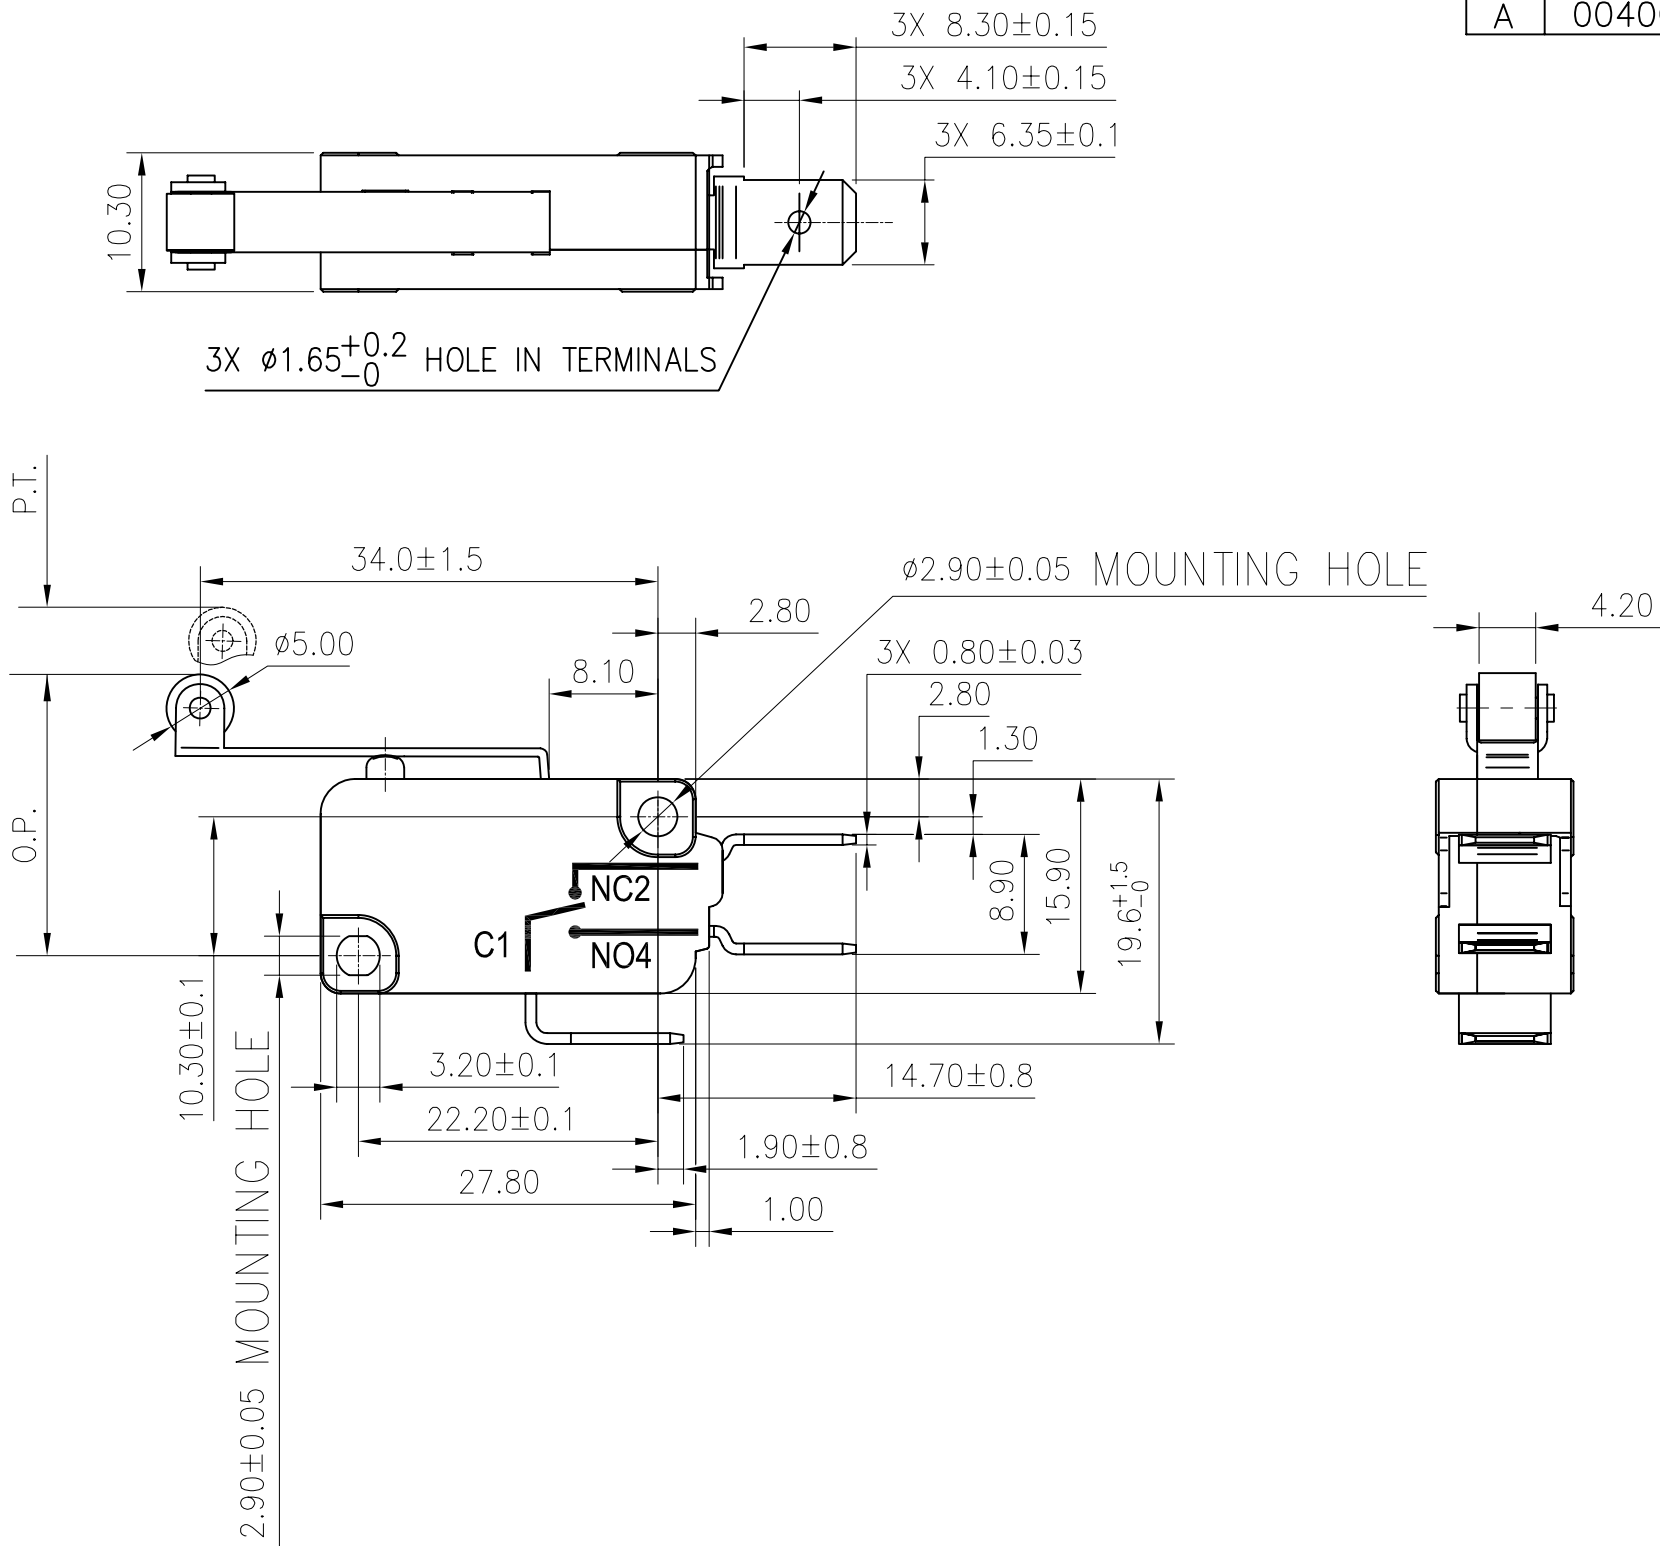


|                          |
|--------------------------|
| HONEYWELL<br>PART NUMBER |
| V15H22-CZ300A06-K        |
| PRODUCT CODE             |
| CFW2072                  |

|     |          |            |       |
|-----|----------|------------|-------|
| REV | DOCUMENT | CHANGED BY | CHECK |
| A   | 0040063  | SS 27MAY08 | BLR   |



NOTES:  
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES  
AND COMPLY WITH EN61058-1 REQUIREMENTS.

|                                 |  |                                                                                                              |  |                                                                                       |  |                                                                                                                                                                 |  |     |  |         |  |           |  |  |  |       |  |        |  |
|---------------------------------|--|--------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----|--|---------|--|-----------|--|--|--|-------|--|--------|--|
| CHARACTERISTICS                 |  | ELECTRICAL DATA                                                                                              |  | DESIGN UNITS: MM                                                                      |  | DRAWN                                                                                                                                                           |  | KSR |  | 26MAY08 |  | Honeywell |  |  |  |       |  |        |  |
| CONTACT ARRANGEMENT<br>S.P.D.T  |  |  22(8)A 250V~<br>25T150 μ |  | TOLERANCES UNLESS NOTED:                                                              |  | CHECK                                                                                                                                                           |  | RJ  |  | 26MAY08 |  |           |  |  |  |       |  |        |  |
| OPERATING FORCE: 180gf MAX.     |  |                                                                                                              |  | NO PLACE X ± -                                                                        |  | THIS DRAWING COVERS A PROPRIETARY ITEM<br>AND IS THE PROPERTY OF HONEYWELL.<br>THIS DRAWING IS NOT TO BE COPIED OR USED<br>WITHOUT THE PERMISSION OF HONEYWELL. |  |     |  |         |  |           |  |  |  |       |  |        |  |
| DIFFERENTIAL FORCE: _____       |  |                                                                                                              |  | ONE PLACE .X ± -                                                                      |  |                                                                                                                                                                 |  |     |  |         |  |           |  |  |  |       |  |        |  |
| RELEASE FORCE: 30gf MIN.        |  |                                                                                                              |  | TWO PLACE .XX ± 0.40                                                                  |  |                                                                                                                                                                 |  |     |  |         |  |           |  |  |  |       |  |        |  |
| FREE POSITION: _____            |  |  22A 1HP 125/250VAC       |  | THREE PLACE .XXX ± -                                                                  |  | INTERPRET PER ASME Y14.5M-1994<br>OTHER HONEYWELL ENGINEERING<br>STANDARDS MAY APPLY                                                                            |  |     |  |         |  |           |  |  |  |       |  |        |  |
| OPERATING POSITION: 20.6±1.6MM. |  |                                                                                                              |  | ANGLES X ± 2°                                                                         |  |                                                                                                                                                                 |  |     |  |         |  |           |  |  |  |       |  |        |  |
| PRE-TRAVEL: 3.2MM MAX.          |  |                                                                                                              |  | THIRD ANGLE PROJECTION                                                                |  | AutoCAD                                                                                                                                                         |  |     |  |         |  |           |  |  |  |       |  |        |  |
| DIFFERENTIAL TRAVEL: 1.2MM MAX. |  |                                                                                                              |  |  |  |                                                                                                                                                                 |  |     |  |         |  |           |  |  |  |       |  |        |  |
| OVER-TRAVEL: 1.3MM MIN.         |  |                                                                                                              |  |                                                                                       |  |                                                                                                                                                                 |  |     |  | SCALE   |  | NTS       |  |  |  | SHEET |  | 1 OF 1 |  |
| FULL OVERTRAVEL FORCE: _____    |  |                                                                                                              |  |                                                                                       |  |                                                                                                                                                                 |  |     |  |         |  |           |  |  |  |       |  |        |  |