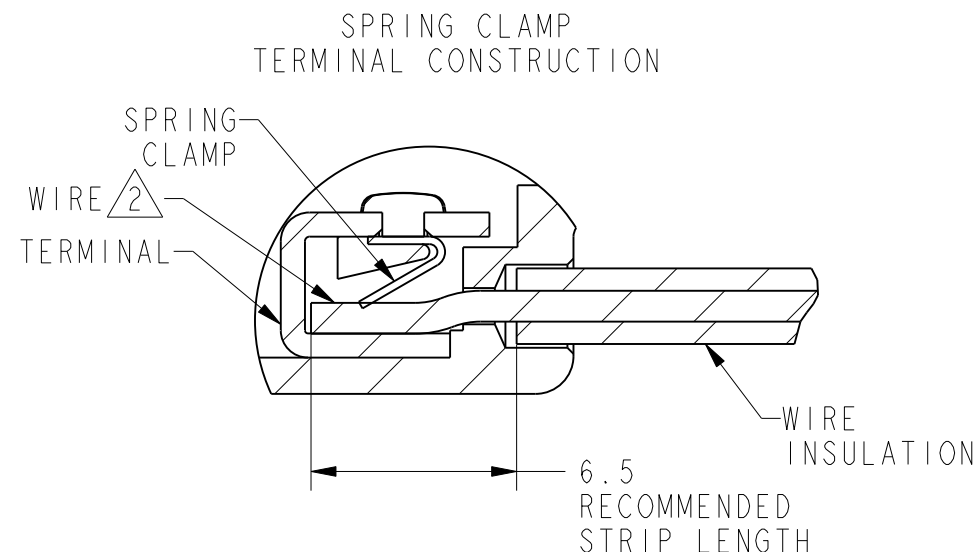




REV	DOCUMENT	CHANGED BY	CHECK
B	0041235	KVS 03JUL08	ASD



NOTES

1 - MOUNTING HOLES WILL ACCEPT Ø3 MAX PINS OR SCREWS.

2 - RECOMMENDED TO BE USED ONLY WITH SOLID WIRE OR FUSED STRANDED WIRE.

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: MM	DRAWN	SJS	30APR07	Honeywell					
OPERATING FORCE----- 200 GRAMS MAX	CONTACT ARRANGEMENT S P D T	TOLERANCES UNLESS NOTED:	CHECK	-	30APR07						
RELEASE FORCE-----50 GRAMS MIN	 IIR(3)/II(3)A 125/250V~ T85 μ 5E4	NO PLACES X ± 1.000	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, BASIC					
PRETRAVEL ----- 1.6 MAX		ONE PLACE .X ± 0.40									
DIFFERENTIAL TRAVEL-----0.25 MAX		TWO PLACE .XX ± 0.150				INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY					
OVERTRAVEL----- 0.8 MIN		THREE PLACE .XXX ± 0.005									
		FOUR PLACE .XXXX ± 0.0050	Pro/ENGINEER 3D			SIZE TYPE B I		DRAWING NAME V15S11-HZ200		REV B	
		ANGLES X ± 3°									
		THIRD ANGLE PROJECTION 				SCALE 2 : 1				SHEET 1 OF 1	