


HONEYWELL PART NUMBER
V15T16-CC100A01-K
PRODUCT CODE
CFW2040

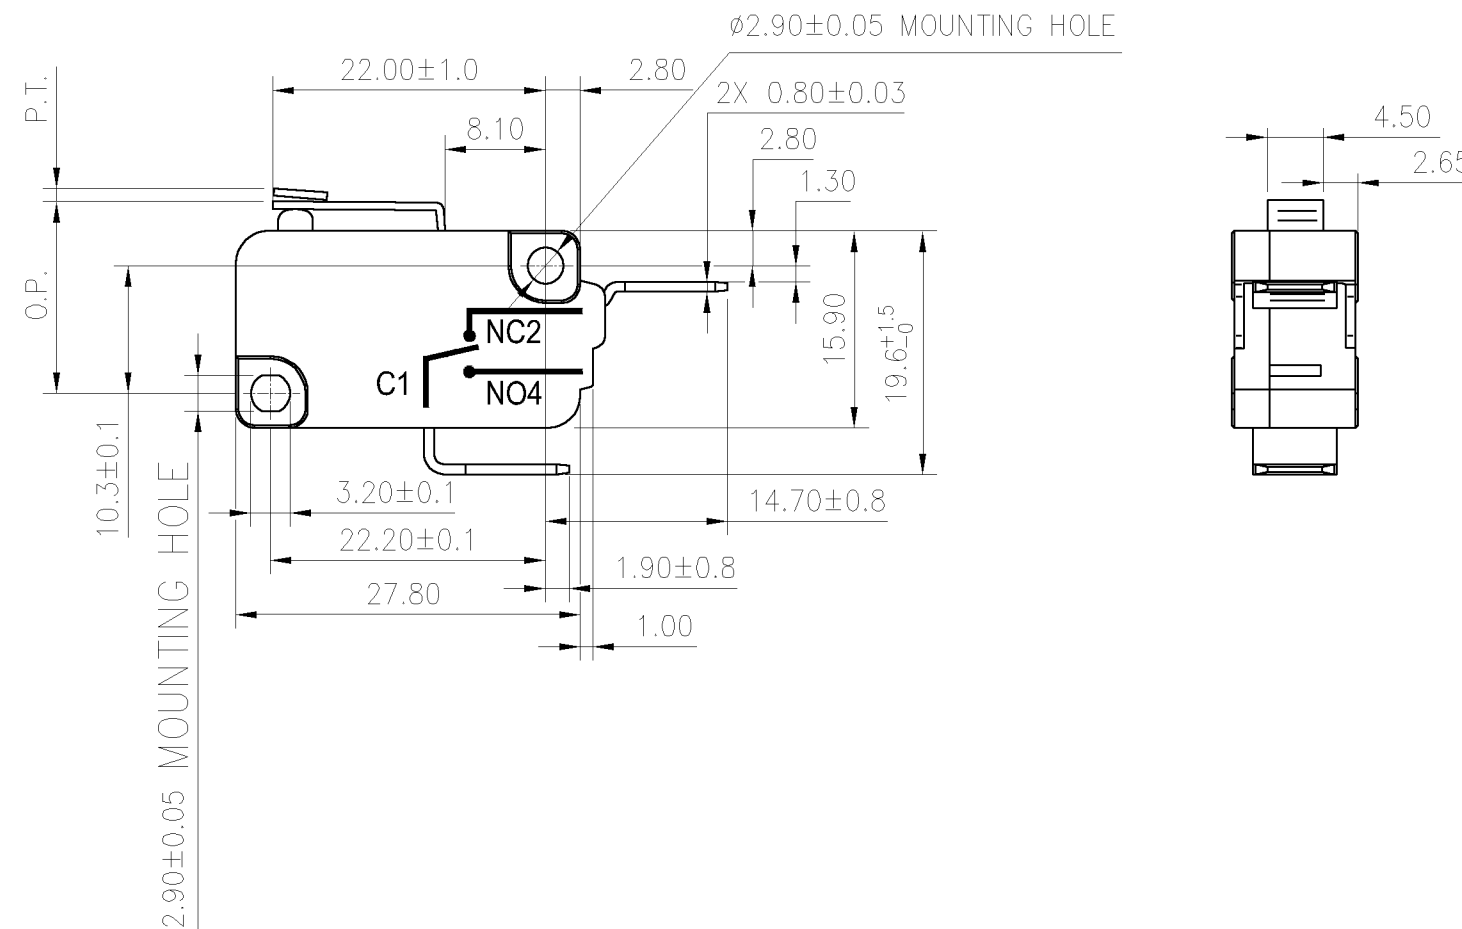

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN	KSR	01APR08	Honeywell				
CONTACT ARRANGEMENT		S.P.N.C		TOLERANCES UNLESS NOTED:		CHECK	RJ	01APR08					
OPERATING FORCE: 100gf MAX.		17 cec 16(4)A 250V~ 25T125 μ 5E4 RU® RU® 16A 1/2HP 125/250VAC		NO PLACE X ± ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.	TITLE						
DIFFERENTIAL FORCE: _____				ONE PLACE .X ± ±									
RELEASE FORCE: 25gf MIN.				TWO PLACE .XX ± ± 0.40			INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						
FREE POSITION: _____				THREE PLACE .XXX ± ±									
OPERATING POSITION: 15.3±0.5MM.				ANGLES X ± ± 2°									
PRE-TRAVEL: 1.6MM MAX.		THIRD ANGLE PROJECTION		AutoCAD	SIZE	TYPE	CAGE CODE	DRAWING NAME		REV			
B	I					V15T16-CC100A01-K		A					
DIFFERENTIAL TRAVEL: 0.4MM MAX.	OVER-TRAVEL: 0.8MM MIN.				FULL OVERTRAVEL FORCE: _____	SCALE	NTS		SHEET	1	OF 1		