
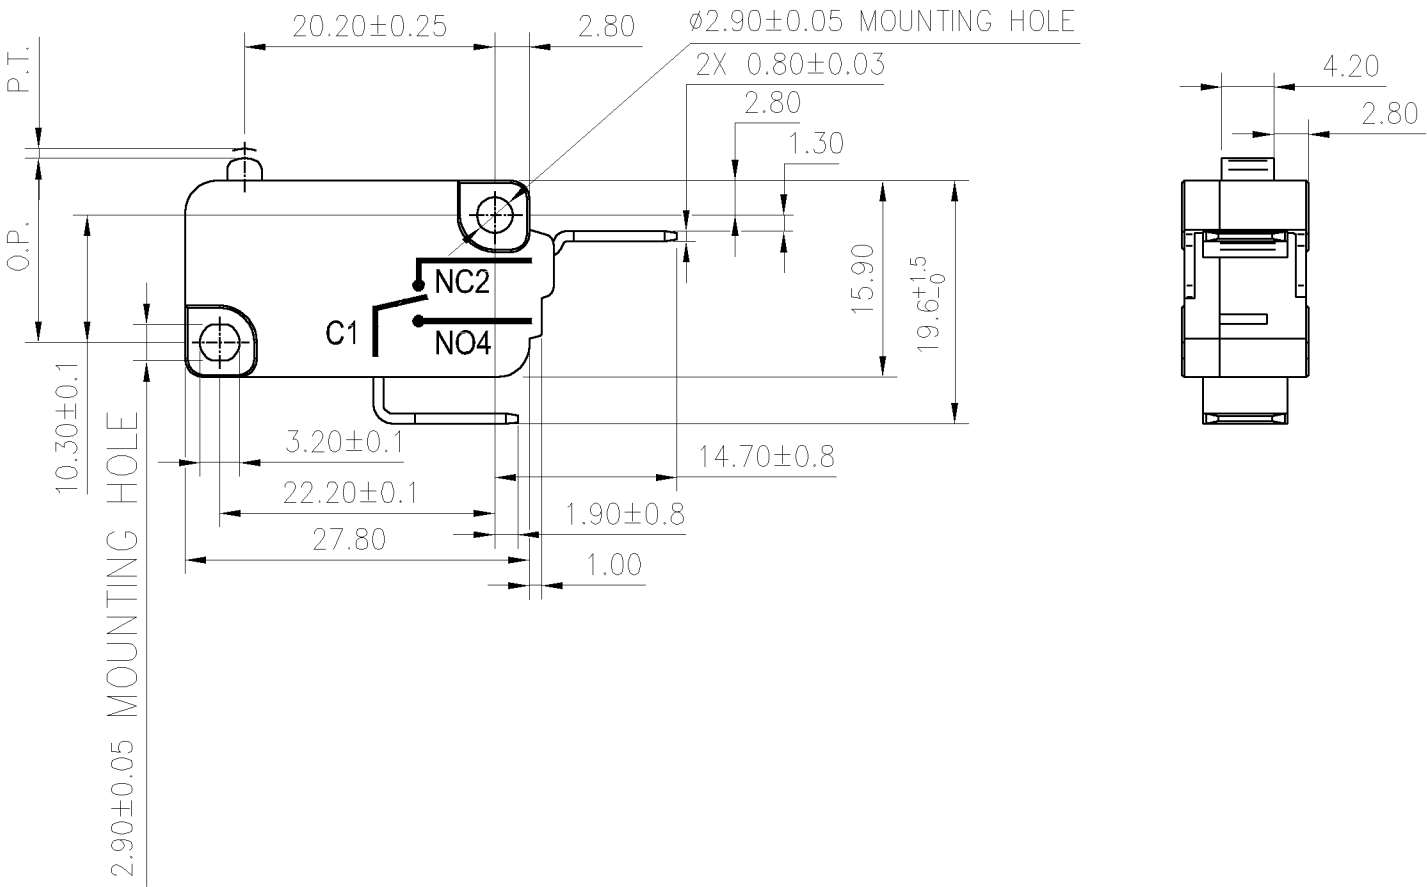
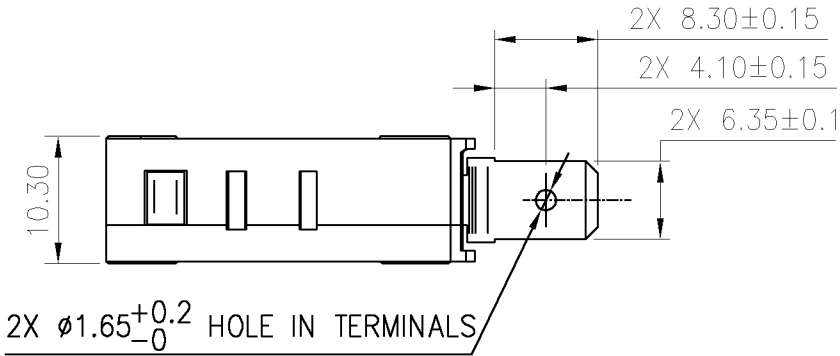


HONEYWELL PART NUMBER
V15T16-CC300-K
PRODUCT CODE
CFW2060

REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR



NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:		DRAWN	KSR	01APR08	Honeywell						
		CONTACT ARRANGEMENT S.P.N.C				CHECK	RJ	01APR08							
OPERATING FORCE: 300gf MAX.		 16(4)A 250V~ 25T125 μ 5E4  16A 1/2HP 125/250VAC		NO PLACE X ± ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC						
DIFFERENTIAL FORCE:				ONE PLACE .X ± ±											
RELEASE FORCE: 75gf MIN.				TWO PLACE .XX ± ± 0.40											
FREE POSITION:				THREE PLACE .XXX ± ±											
OPERATING POSITION: 14.7±0.5MM.						ANGLES X ± ± 2°		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE	DRAWING NAME	
PRE-TRAVEL: 1.6MM MAX.				THIRD ANGLE PROJECTION 			AutoCAD			B	I		V15T16-CC300-K		A
DIFFERENTIAL TRAVEL: 0.4MM MAX.							SCALE	NTS			SHEET	1	OF	1	
OVER-TRAVEL: 0.8MM MIN.															
FULL OVERTRAVEL FORCE:															