


HONEYWELL PART NUMBER
V15T16-CC300A01-K
PRODUCT CODE
CFW2061

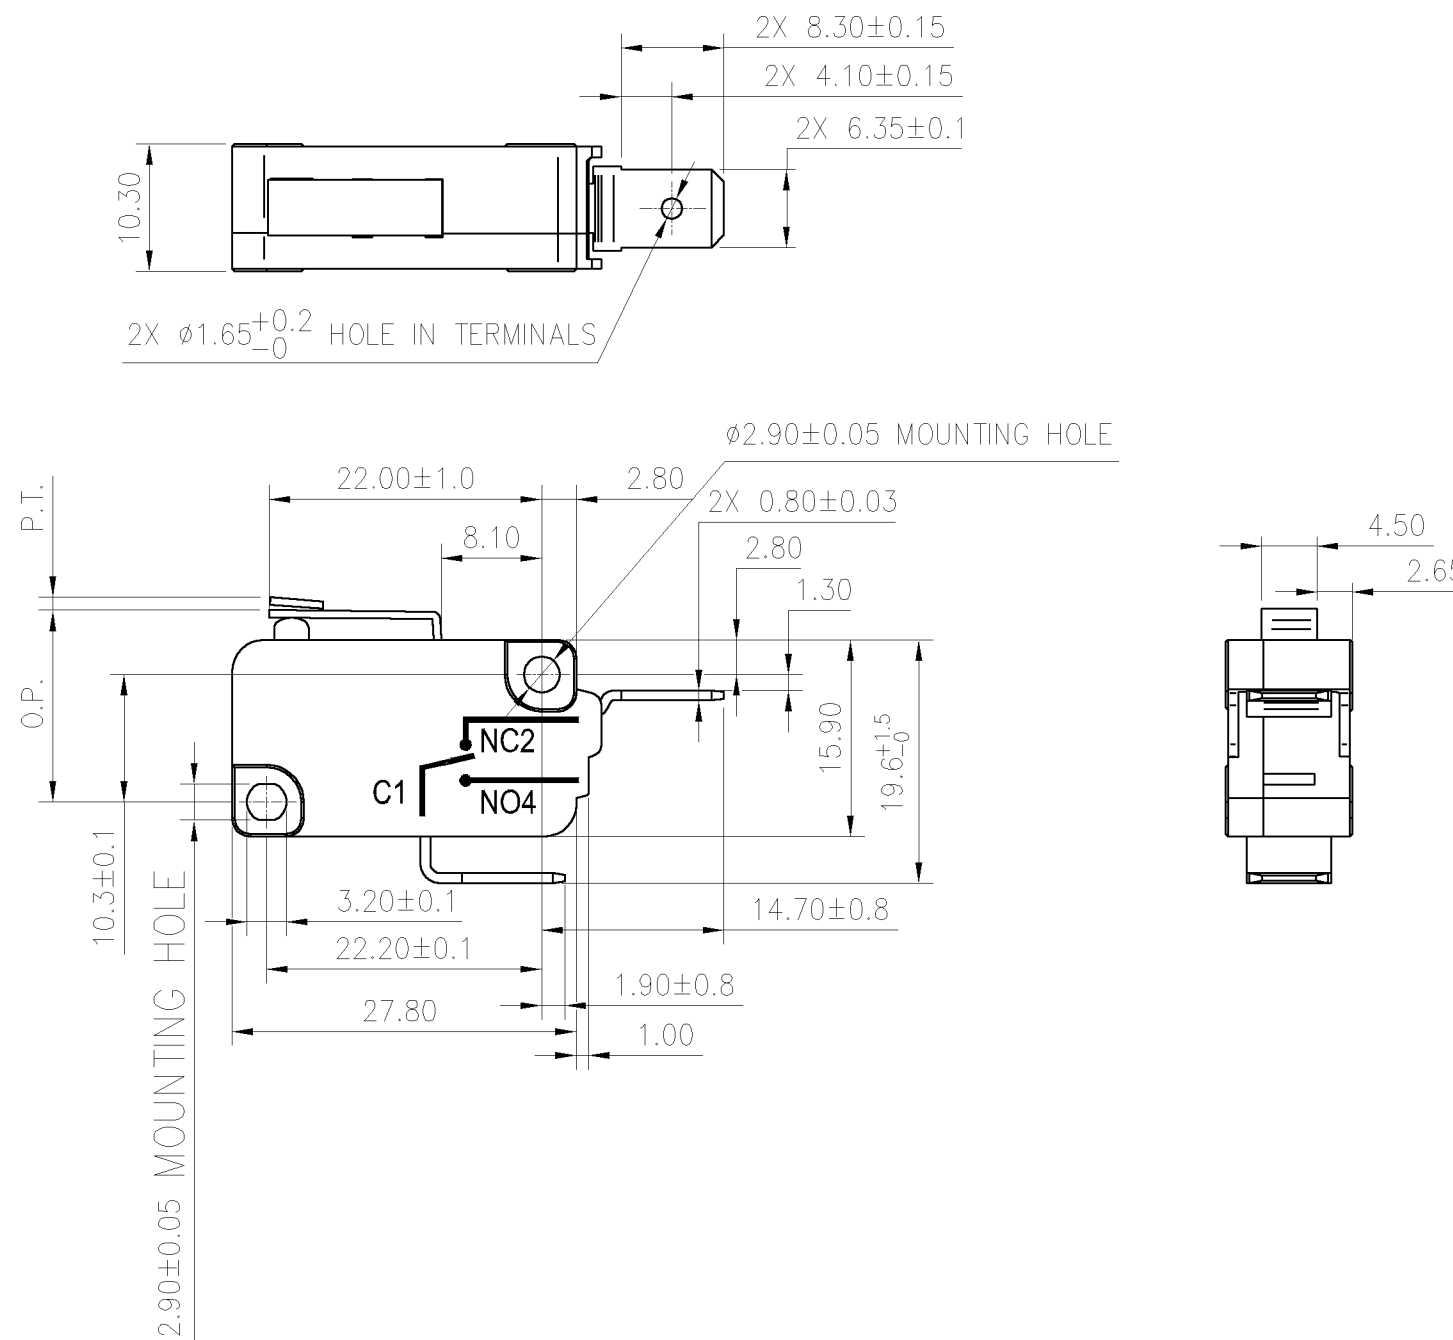

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN	KSR	01APR08	Honeywell				
OPERATING FORCE: 300gf MAX.		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK	RJ	01APR08					
DIFFERENTIAL FORCE:		17 CAC 16(4)A 250V~ 25T125 μ 5E4 RV c RV 16A 1/2HP 125/250VAC		NO PLACE X ± ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.	TITLE						
RELEASE FORCE: 75gf MIN.				ONE PLACE .X ± ±									
FREE POSITION:				TWO PLACE .XX ± ± 0.40									
OPERATING POSITION: 15.3±0.5MM.				THREE PLACE .XXX ± ±									
PRE-TRAVEL: 1.6MM MAX.				ANGLES X ± ± 2°		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE B TYPE I CAGE CODE DRAWING NAME V15T16-CC300A01-K REV A						
DIFFERENTIAL TRAVEL: 0.4MM MAX.		THIRD ANGLE PROJECTION											
OVER-TRAVEL: 0.8MM MIN.				AutoCAD	SCALE	NTS	SHEET	1 OF 1					
FULL OVERTRAVEL FORCE:													