


REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR

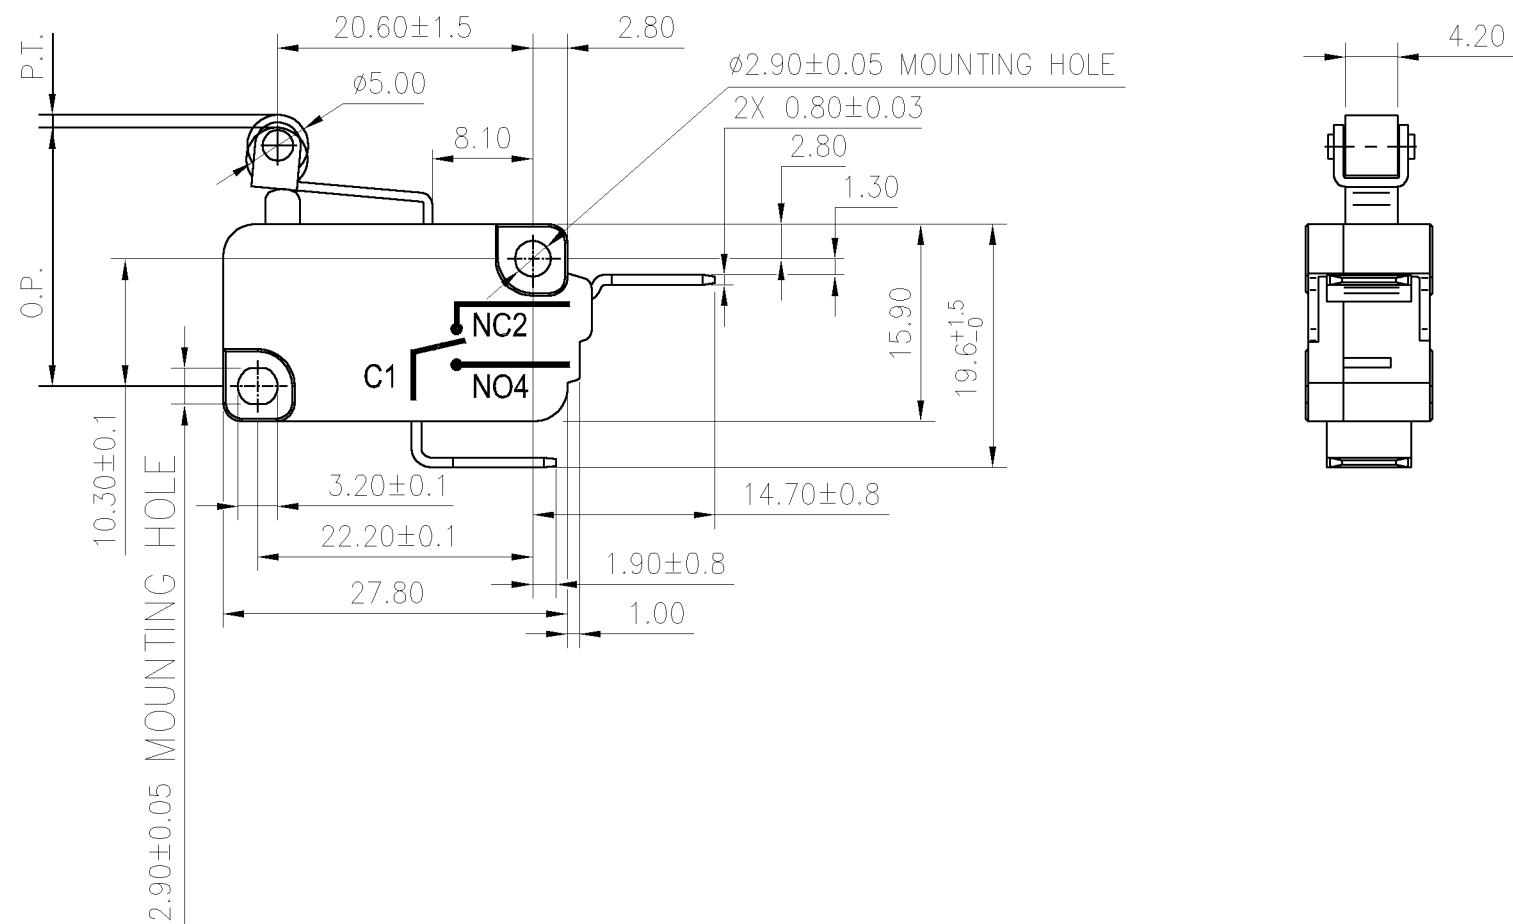

1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM				DRAWN	KSR	01APR08	Honeywell								
OPERATING FORCE: 350gf MAX. DIFFERENTIAL FORCE: RELEASE FORCE: 60gf MIN. FREE POSITION: OPERATING POSITION: 20.6±0.8MM. PRE-TRAVEL: 1.6MM MAX. DIFFERENTIAL TRAVEL: 0.4MM MAX. OVER-TRAVEL: 0.8MM MIN. FULL OVERTRAVEL FORCE:		CONTACT ARRANGEMENT S.P.N.C		TOLERANCES UNLESS NOTED:				CHECK	RJ	01APR08						TITLE SWITCH - BASIC			
		17 COC 16(4)A 250V~ 25T125 μ 5E4 16A 1/2HP 125/250VAC		NO PLACE X ± ± ONE PLACE .X ± ± TWO PLACE .XX ± ± 0.40 THREE PLACE .XXX ± ± ANGLES X ± ± 2°				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I				
				THIRD ANGLE PROJECTION				AutoCAD			SCALE	NTS			SHEET	1	OF 1		