


REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

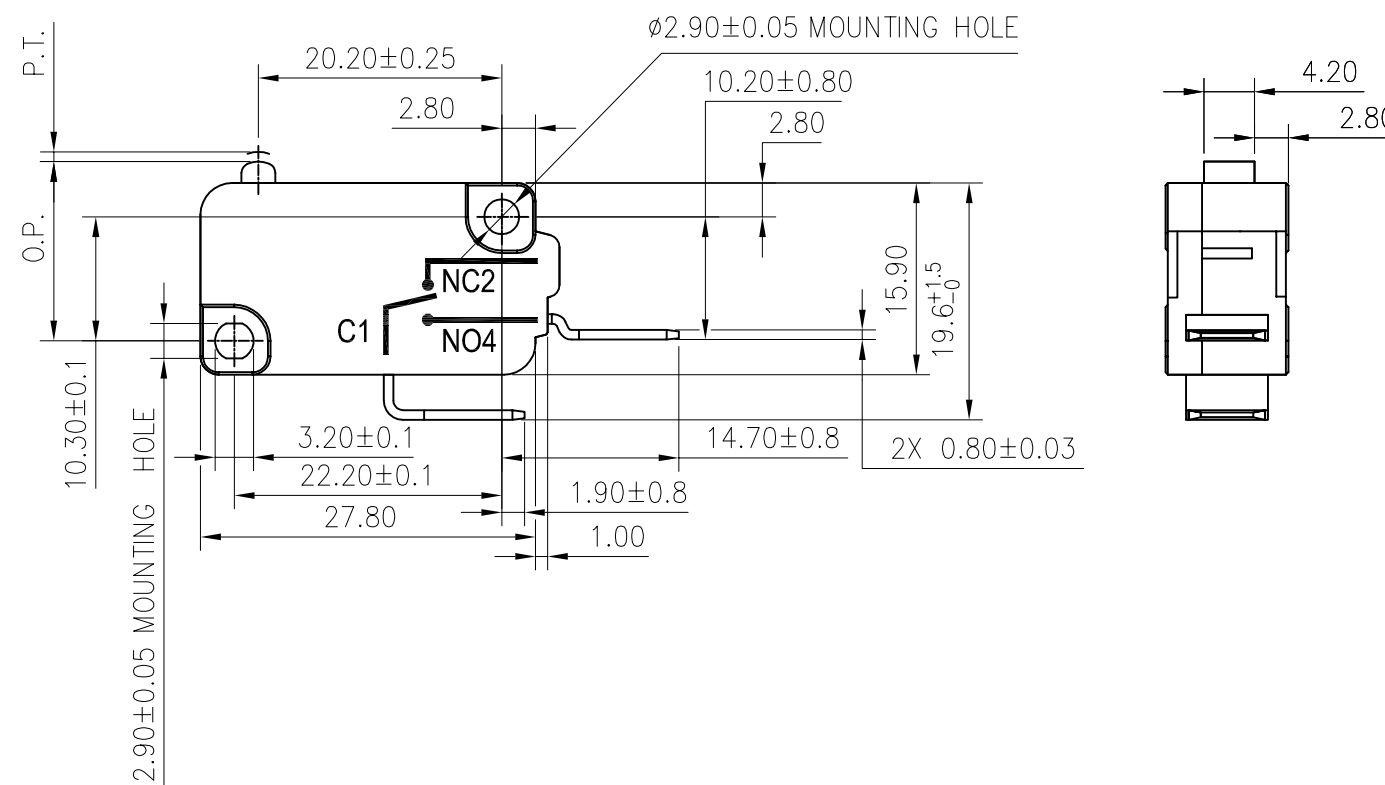

1. TERMINALS WILL ACCEPT 6.35 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN		KSR		03DEC07		Honeywell							
		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK		RJ		03DEC07						TITLE			
OPERATING FORCE: 100gf MAX.		E7 CQC 16(4)A 250V~ 25T125 μ 5E4 RJ® cRJ® 16A 1/2HP 125/250VAC		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE B		TYPE I		CAGE CODE					
DIFFERENTIAL FORCE:																			
RELEASE FORCE: 25gf MIN.																			
FREE POSITION:																			
OPERATING POSITION: 14.7±0.5MM.				ONE PLACE .X ± -		THIRD ANGLE PROJECTION		AutoCAD		SCALE		—		SHEET		1 OF 1			
PRE-TRAVEL: 1.6MM MAX.																			
DIFFERENTIAL TRAVEL: 0.4MM MAX.																			
OVER-TRAVEL: 0.8MM MIN.																			
FULL OVERTRAVEL FORCE:																			