


REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

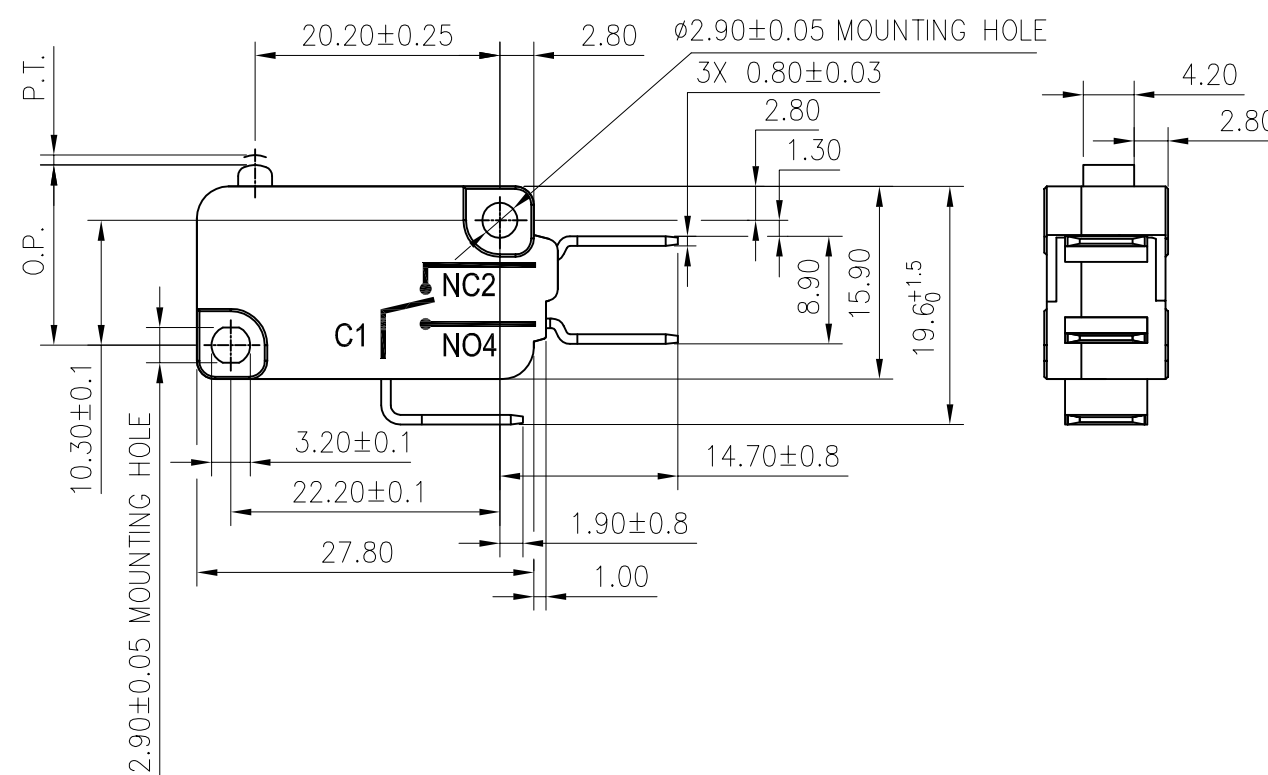

1. TERMINALS WILL ACCEPT 6.35 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN	KSR	03DEC07	Honeywell							
OPERATING FORCE: 200gf MAX.		CONTACT ARRANGEMENT S.P.D.T		TOLERANCES UNLESS NOTED:		CHECK	RJ	03DEC07								
DIFFERENTIAL FORCE:		EN 17 CQC 16(4)A 250V~ 25T125 μ 5E4 RU C RU 16A 1/2HP 125/250VAC		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE						
RELEASE FORCE: 50gf MIN.				ONE PLACE .X ± -												
FREE POSITION:				TWO PLACE .XX ± 0.40		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE B	TYPE I	CAGE CODE	DRAWING NAME V15T16-CZ200-K		REV B	
OPERATING POSITION: 14.7±0.5MM.				THREE PLACE .XXX ± -												
PRE-TRAVEL: 1.6MM MAX.				ANGLES X ± 2°												
DIFFERENTIAL TRAVEL: 0.4MM MAX.		THIRD ANGLE PROJECTION														
OVER-TRAVEL: 0.8MM MIN.								AutoCAD	SCALE	—			SHEET	1	OF	1
FULL OVERTRAVEL FORCE:																