
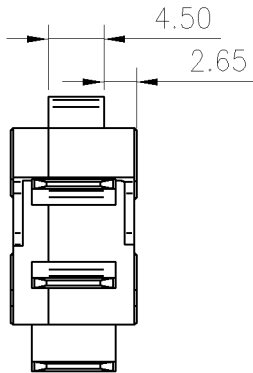
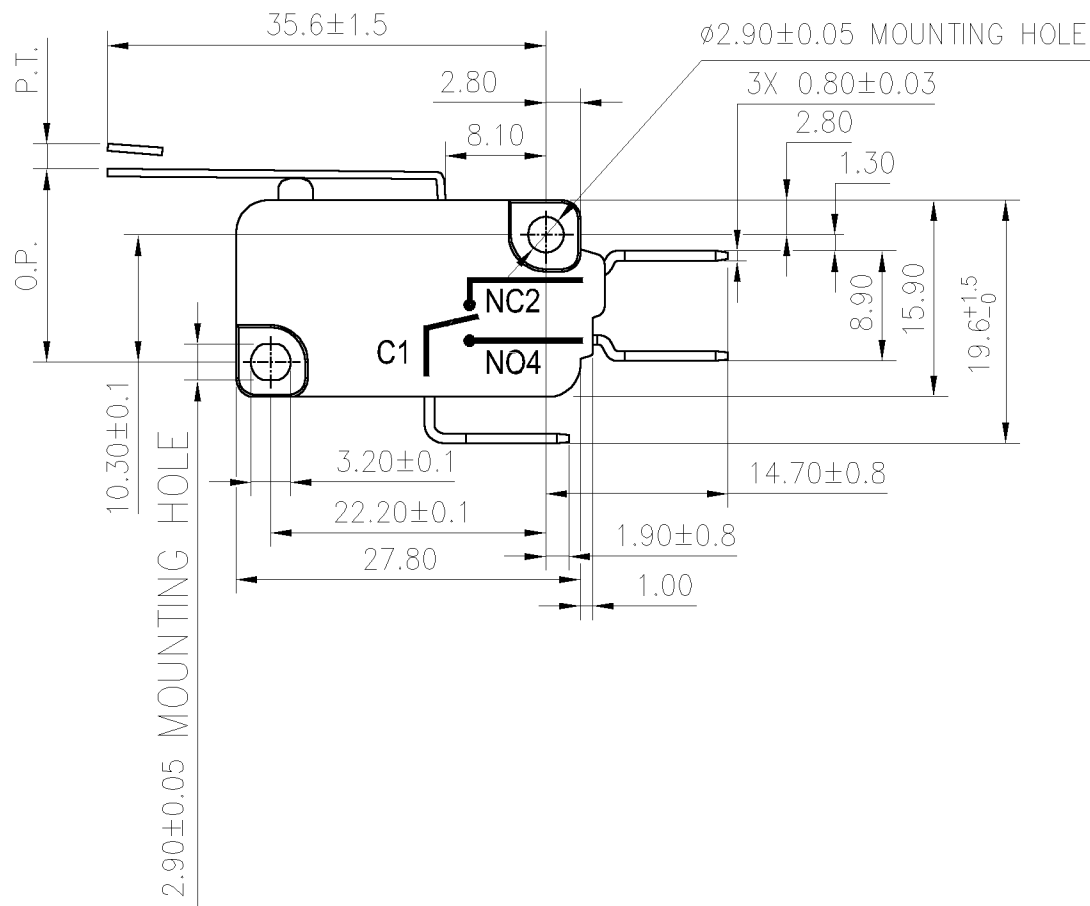


HONEYWELL PART NUMBER
V15T16-CZ300A02-K
PRODUCT CODE
CFW2056

REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR

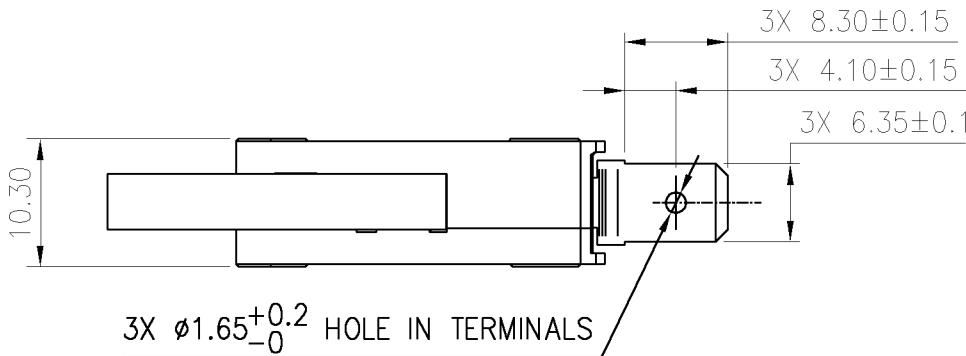

NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES
AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM				DRAWN	KSR	01APR08	Honeywell					
		CONTACT ARRANGEMENT S.P.D.T		TOLERANCES UNLESS NOTED:				CHECK	RJ	01APR08						
OPERATING FORCE: 180gf MAX.				NO PLACE X ± ±				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE					
DIFFERENTIAL FORCE:				ONE PLACE .X ± ±												
RELEASE FORCE: 30gf MIN.				TWO PLACE .XX ± ± 0.40												
FREE POSITION:				THREE PLACE .XXX ± ±				INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B TYPE I CAGE CODE DRAWING NAME V15T16-CZ300A02-K REV A					
OPERATING POSITION: 15.3±1.5MM.				ANGLES X ± ± 2°												
PRE-TRAVEL: 3.2MM MAX.				THIRD ANGLE PROJECTION				AutoCAD			SCALE NTS		SHEET 1		OF 1	
DIFFERENTIAL TRAVEL: 1.2MM MAX.																
OVER-TRAVEL: 1.3MM MIN.																
FULL OVERTRAVEL FORCE:																



16A 1/2HP 125/250VAC

THIRD ANGLE PROJECTION

