

MICRO SWITCH



FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-1A17D8-000-1

CW-B0250

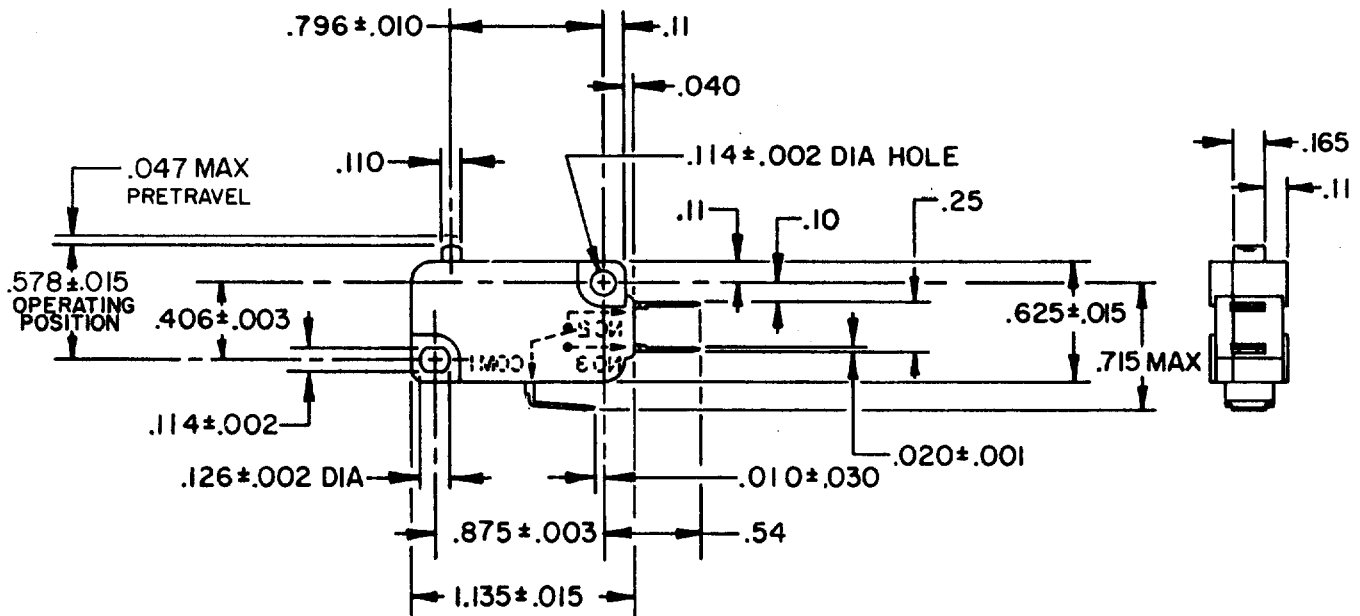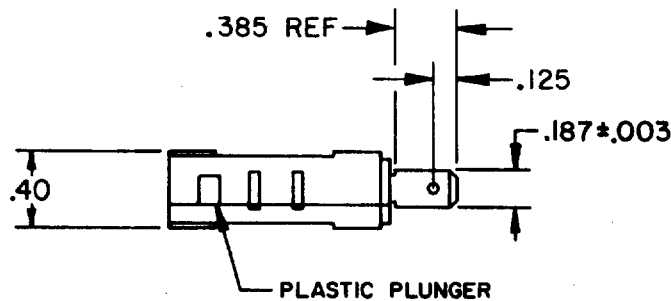


NOTE

1 - SWITCH WILL OPERATE AND RELEASE WITHIN FULL EXCURSION OF THE PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - 150 GRAM MAX

RELEASE FORCE - - - - - 25 GRAM MIN

DIFFERENTIAL TRAVEL - - - - .002-.006

OVERTRAVEL - - - - - .050 MIN

FREE POSITION - - - - - .625 MAX

RELEASE TRAVEL - - - - - .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162

5A 125, 250, 277 VAC
1/10 HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	17.04	X	0.0005
ONE PLACE	X.X	0.4/0.18	X.X	0.001/0.03
TWO PLACES	X.XX	0.16/0.008	X.XX	0.002/0.015
THREE PLACES	X.XXX		X.XXX	0.0005/0.005

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT

V7-1A17D8-000-1

M

DRAWING
NUMBER

3

ISSUE

3

CHECK

CHECK

CHECK

CHECK

CHECK

FO-52848-A

DRAWN

T SK 12 DEC 86

REPLACES X86440-V7

RELEASE NO. PR-15262