

CATALOG LISTING

V7-1A17D8

ISSUE
5

REPLACES X94122-V7

RELEASE NO. PR-17140

CHECK

30 JAN 12

CMH

J A P

CHECK

27 FEB 89

28 FEB 89

J A P

CHECK

27 FEB 89

J A P

CHECK

27 FEB 89

J A P

DRAWN

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING


V7-1A17D8

CW-B0240

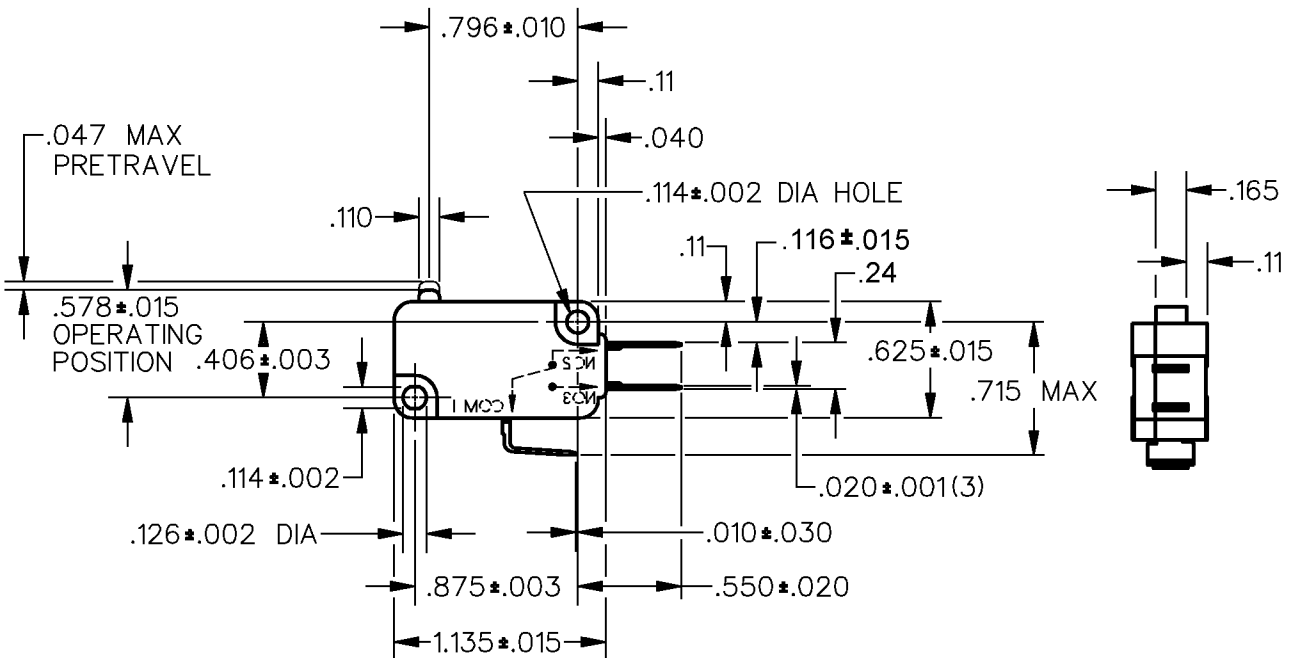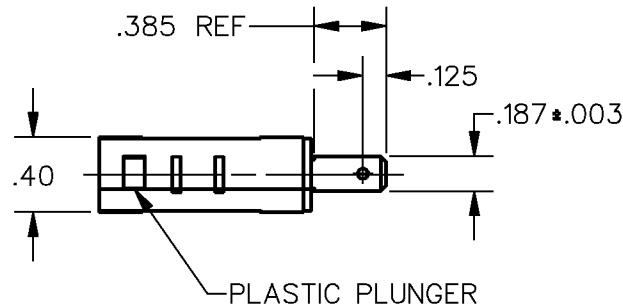

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 150 GRAMS MAX
RELEASE FORCE — — — 25 GRAMS MIN
DIFFERENTIAL TRAVEL — — — .002—.010
OVERTRAVEL — — — — .050 MIN
FREE POSITION — — — — .625 MAX
RELEASE TRAVEL — — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162 5A 125, 250, 277 VAC
1/10 HP 250 VAC



SCALE NONE DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

RASTER
DRAWN