

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V7-1A17P02

CW-B0265

CATALOG LISTING

V7-1A17P02
PAGE 1 OF 1

REPLACES

RELEASE NO. PR-16947

M

ISSUE
5

REVISIONS

A	PR	16947
14	WJM	DEC 88
B	CO-	66886
17	BAB	JUL 90
C	CO-	74613
12	GRT	APR 93
D	CO-	79143
19	DCS	JUL 95

CHECK

CHECK

15 DEC 88

JAP



CHECK

14 DEC 88


WJM

DRAWN

DDM/CAD

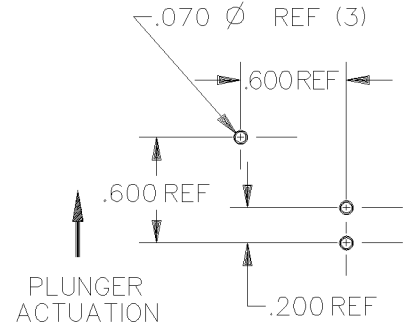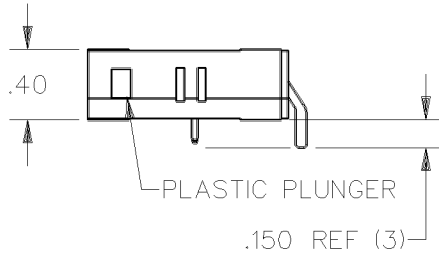

TERMINATION PATTERN

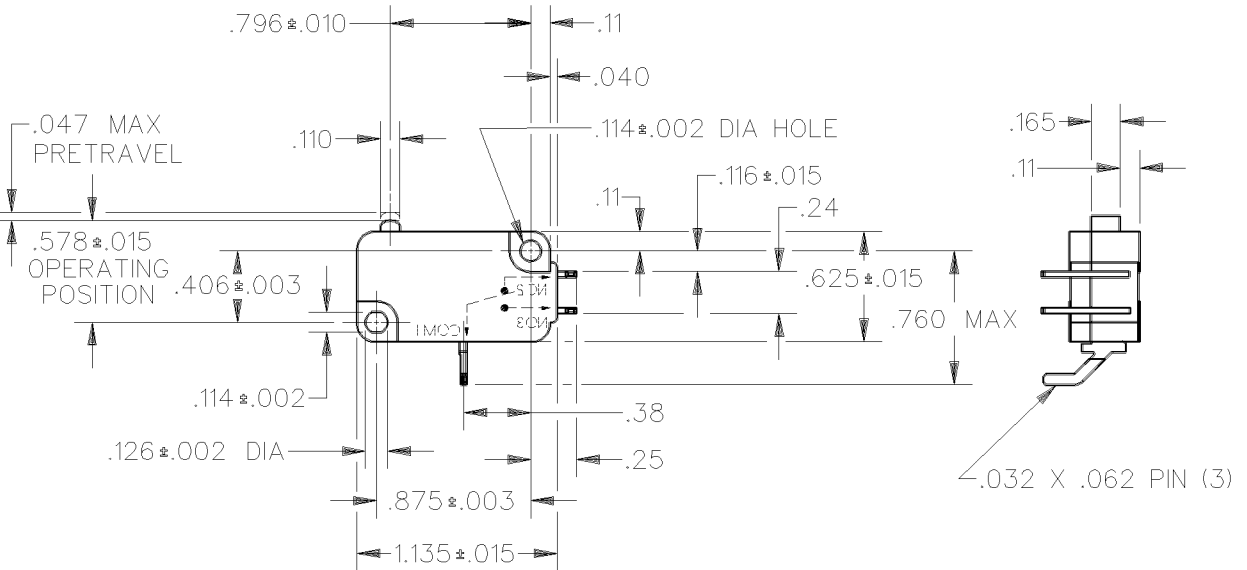

NOTE
1 - TERMINATION MAY REQUIRE STUFFING INTO BOARD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — —150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE— — —25 GRAMS MIN	5A 125, 250, 277 VAC 1/10 HP 250 VAC L162	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL— — —.002-.010		TWO PLACE (.00)	±.015
OVERTRAVEL— — — — —.050 MIN		THREE PLACE (.000)	±.005
FREE POSITION— — — — —.625 MAX		ANGLES	±
RELEASE TRAVEL— — — — —.010 MIN		WEIGHT	