

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-1B17D8-263

CW-B4709

CATALOG LISTING

V7-1B17D8-263

REPLACES

RELEASE NO. PR-19143

ISSUE

3

REVISIONS

A	CO-71698	30JAN12
	JAL	
	15 NOV 93	
B	0085964	30JAN12
	SBH	

CHECK

30JAN12

CMH

CHECK

27JUN 91



LAD

CHECK

20JUN 91

RASTER


DRAWN

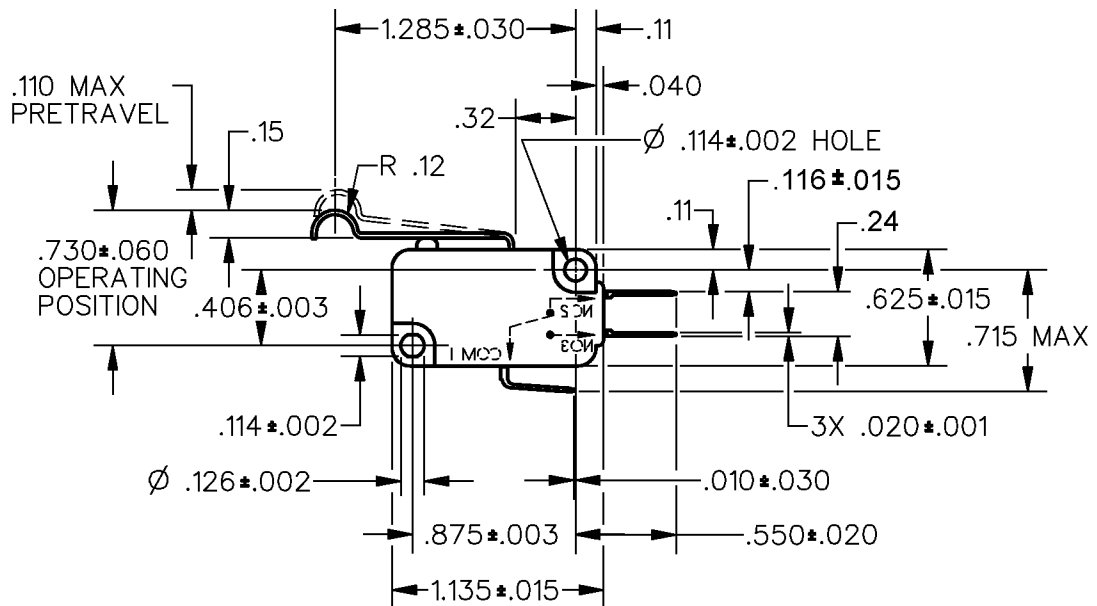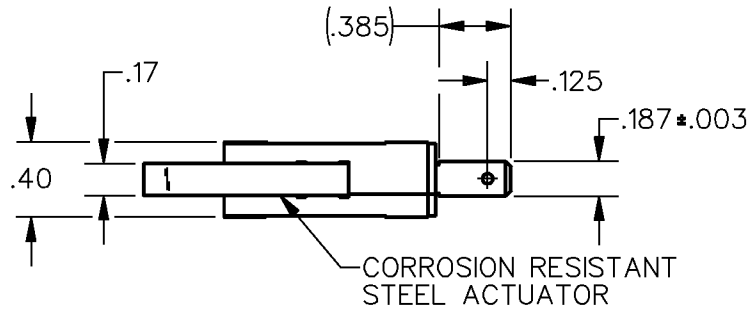

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE--- 90 GRAMS MAX
RELEASE FORCE--- 9 GRAMS MIN
DIFFERENTIAL TRAVEL--- .030 MAX
OVERTRAVEL--- .060 MIN
RELEASE TRAVEL--- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"



SCALE NONE

DO NOT
SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT