


REV	DOCUMENT	CHANGED BY	CHECK
A	0032560	MST 25JUL07	PSR

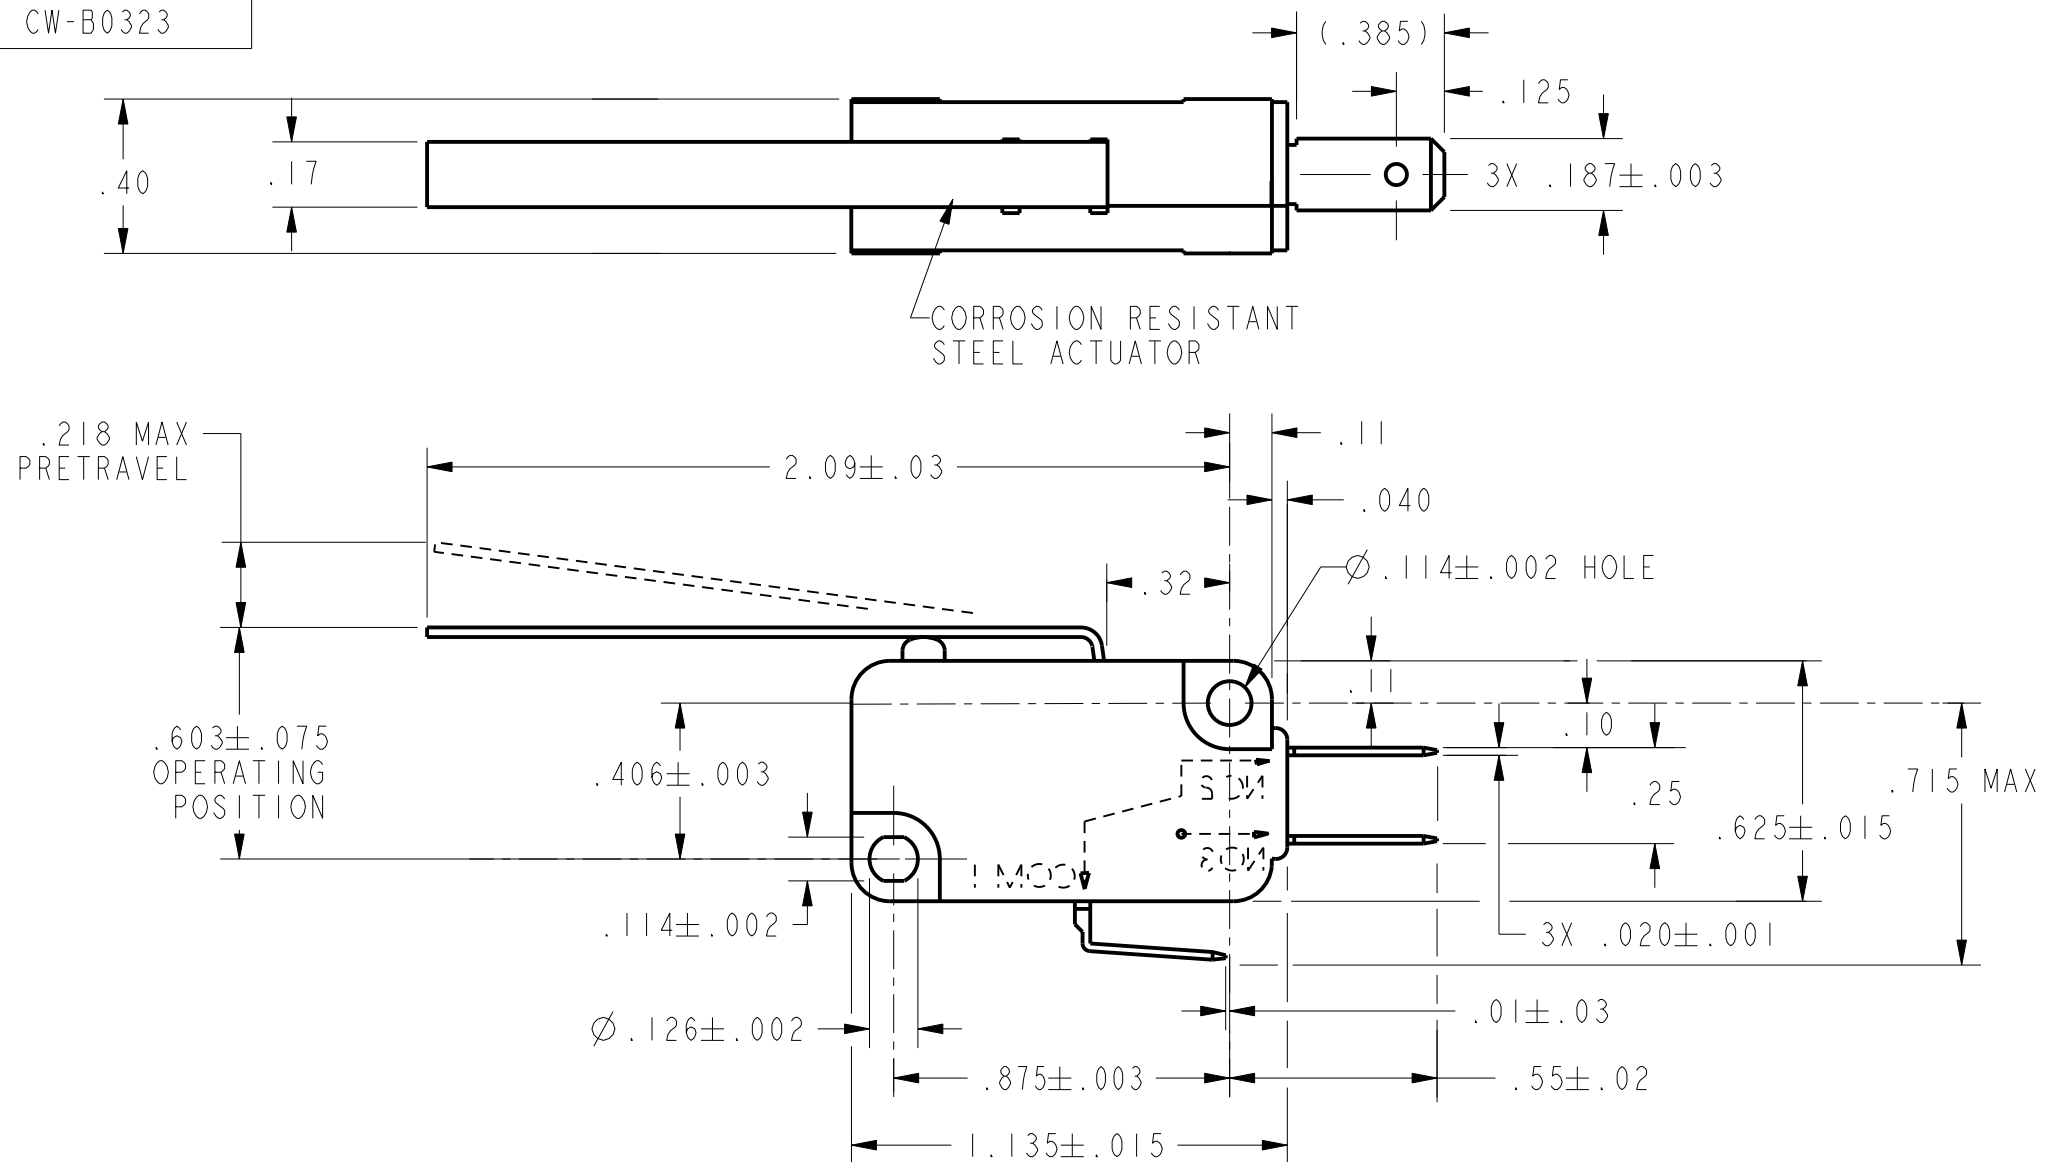

REPLACES: X200883-V7

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	MST	25JUL07	Honeywell						
OPERATING FORCE----- 51 GRAMS MAX		CONTACT ARRANGEMENT S P D T				CHECK	PSR	25JUL07							
RELEASE FORCE----- 4 GRAMS MIN		L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L" 10 (3) 250 T85 IE5 CE EN 50500 UL UL		NO PLACES X ± 0.400		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH, BASIC					
DIFFERENTIAL TRAVEL----- .047 MAX				ONE PLACE .X ± 0.03											
OVERTRAVEL----- .114 MIN				TWO PLACE .XX ± 0.015		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV	
RELEASE TRAVEL----- .027 MIN				THREE PLACE .XXX ± 0.005						B	I	V7-1B19D8-045		A	
				FOUR PLACE .XXXX ± 0.0005		Pro/ENGINEER 2D				SCALE	2:1			SHEET	1 OF 1
				ANGLES X ± 3											
				THIRD ANGLE PROJECTION											