FO-50360-L

CW-B0201

REV	DOCUMENT	CHANGED BY	CHECK
2	202921	DLT 21MAY01	SAV
3	203625	GJW 2 AUG 01	SAV

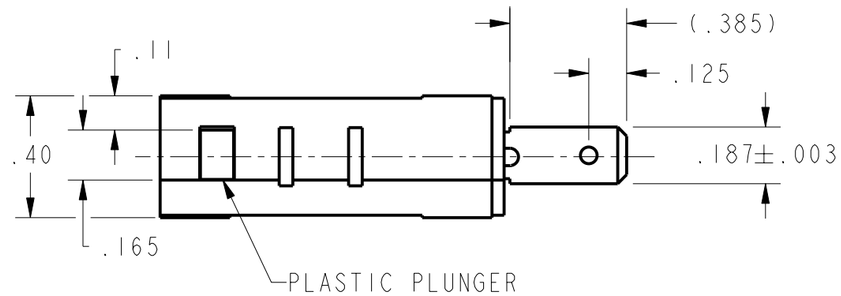

NOTES
1 - COMMON TERMINAL CONFORMS TO .250 WIDE X .032 THICK NEMA DC-2 SPECIFICATION
2 - METRIC MOUNTING HOLES

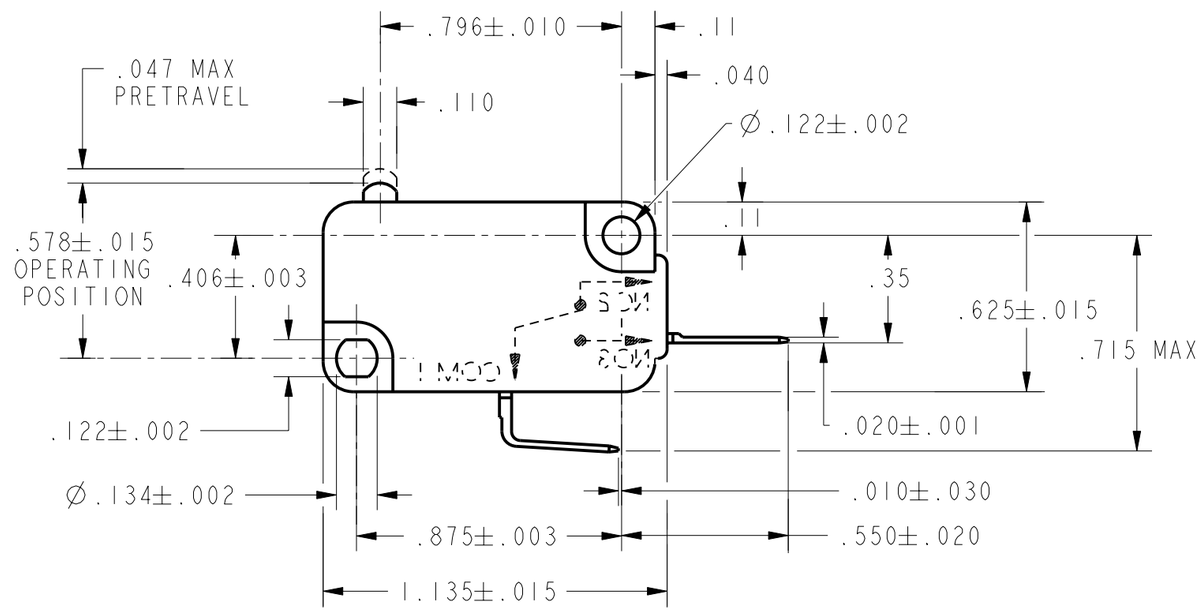

CHARACTERISTICS	
OPERATING FORCE	150 GRAMS MAX
RELEASE FORCE	25 GRAMS MIN
DIFFERENTIAL TRAVEL	.002-.010
OVERTRAVEL	.050 MIN
FREE POSITION	.625 MAX
RELEASE TRAVEL	.010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

L156
11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"

10 (3) ~ / 250
T85 1E5 µ

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0.4
TWO PLACE	.XX	±.015	±0.15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	DLT	21MAY01
CHECK	SAV	21MAY01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell
Sensing and Control

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-1B20D9C2-000-1	3

SCALE NONE | WEIGHT | SHEET 1 OF 1