

FED.MFG.CODE 91929

CATALOG LISTING

CW-B4775

CATALOG LISTING

V7-1B37D8-263

REPLACES

RELEASE NO. PR-20328

CHECK

CHECK

16 OCT 92

JAL

CHE 2

OCT

D15

1


N

2
SSUE

REVISIONS


A	CO 76502
DCS 20 JAN 94	

DDM/CAD

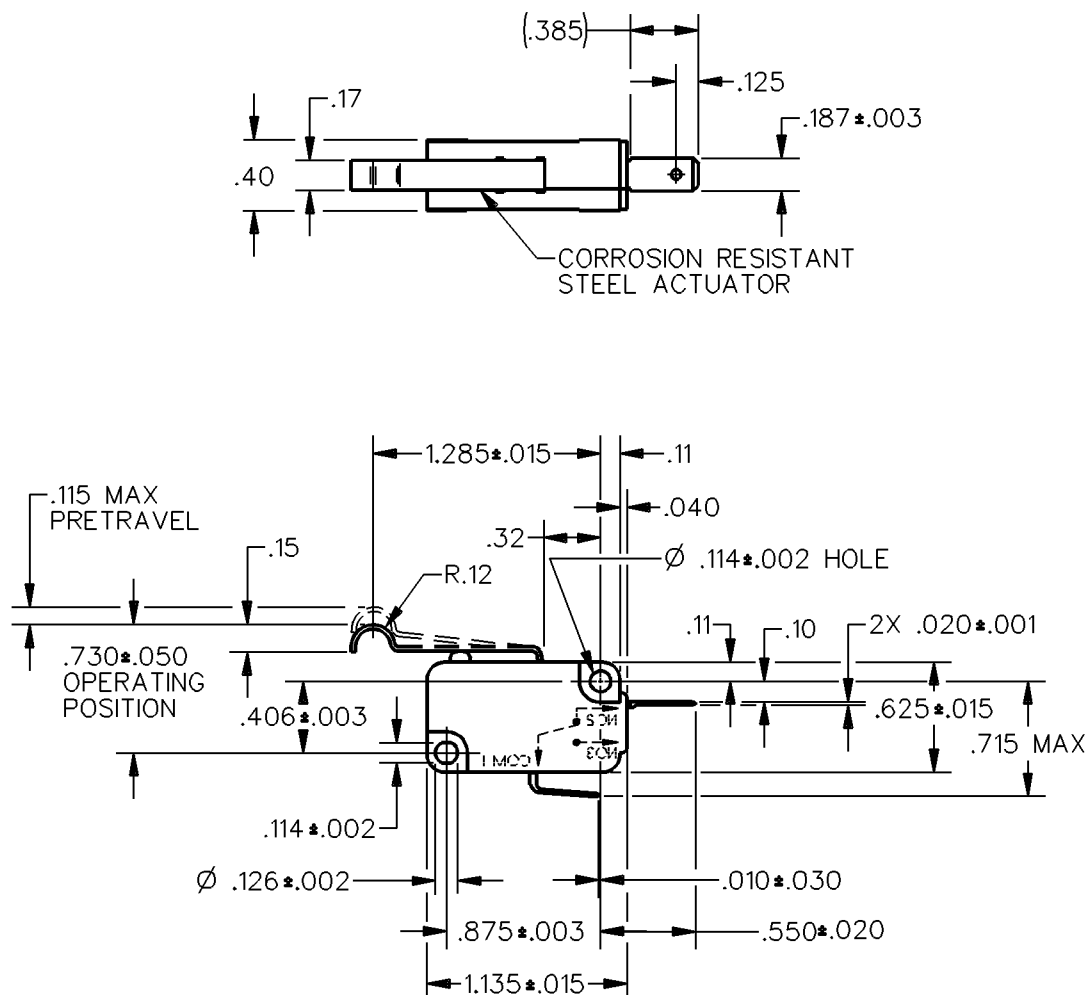

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT S P N C		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OPERATING FORCE— — — 95 GRAMS MAX	L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"		ONE PLACE (.0)	± .030
RELEASE FORCE — — — 9 GRAMS MIN			TWO PLACE (.00)	± .015
DIFFERENTIAL TRAVEL — — — .025 MAX			THREE PLACE (.000)	± .005
OVERTRAVEL — — — — — .060 MIN			ANGLES	±
RELEASE TRAVEL — — — — — .015 MIN			WEIGHT	