
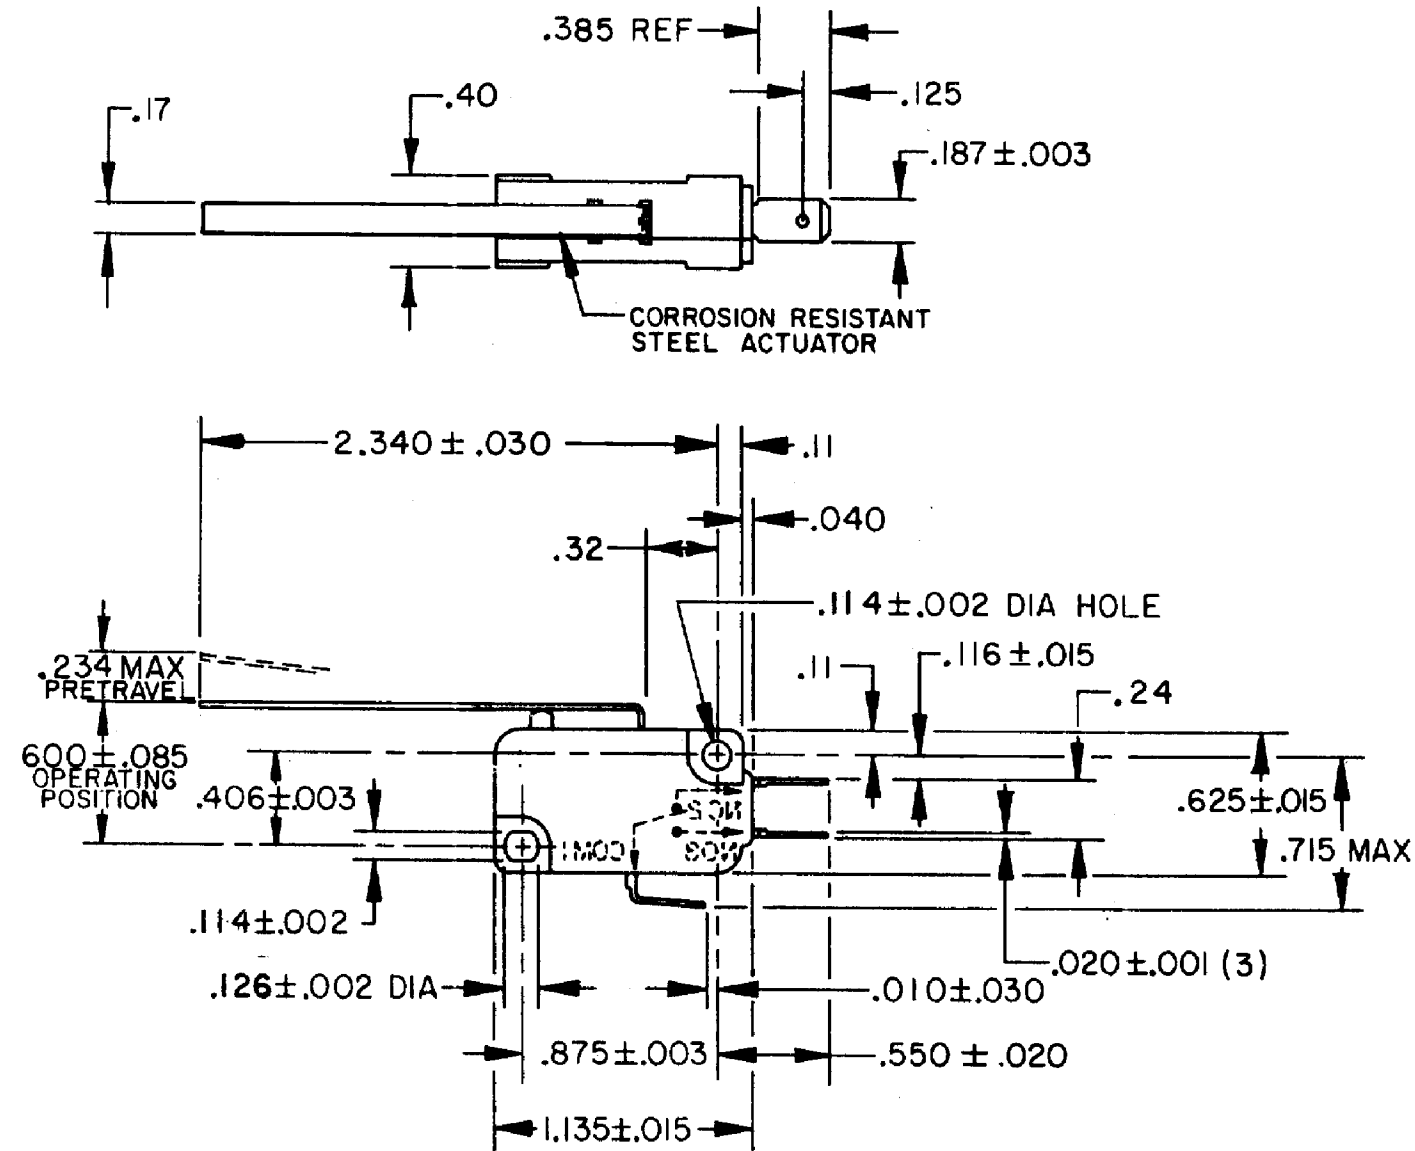


HONEYWELL
PART NUMBER

REV	DOCUMENT	CHANGED BY	CHECK
7	0086919	VKR 28FEB12	CMH



RELEASE NO	CATALOG LISTING
PR-16322	V7-1C17D8-048
	CW-B1620

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	JAP	28MAR88	Honeywell					
OPERATING FORCE----- 45 GRAMS MAX		CONTACT ARRANGEMENT S P D T				CHECK	DCS	28SEP89						
RELEASE FORCE ----- 5 GRAMS MIN		L215 15.1A 1/2HP 125, 250, 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L" 		NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			TITLE SWITCH, BASIC					
DIFFERENTIAL TRAVEL ----- .060 MAX				ONE PLACE .X ± .030										
OVERTRAVEL ----- .165 MIN				TWO PLACE .XX ± .015										
RELEASE TRAVEL ----- .030 MIN				THREE PLACE .XXX ± .005										
				FOUR PLACE .XXXX ± -										
				ANGLES ± -					SIZE DWG TYPE DRAWING NAME REV					
				THIRD ANGLE PROJECTION 		RASTER			B I		V7-1C17D8-048		7	
									SCALE -		WEIGHT		SHEET 1 OF 1	