


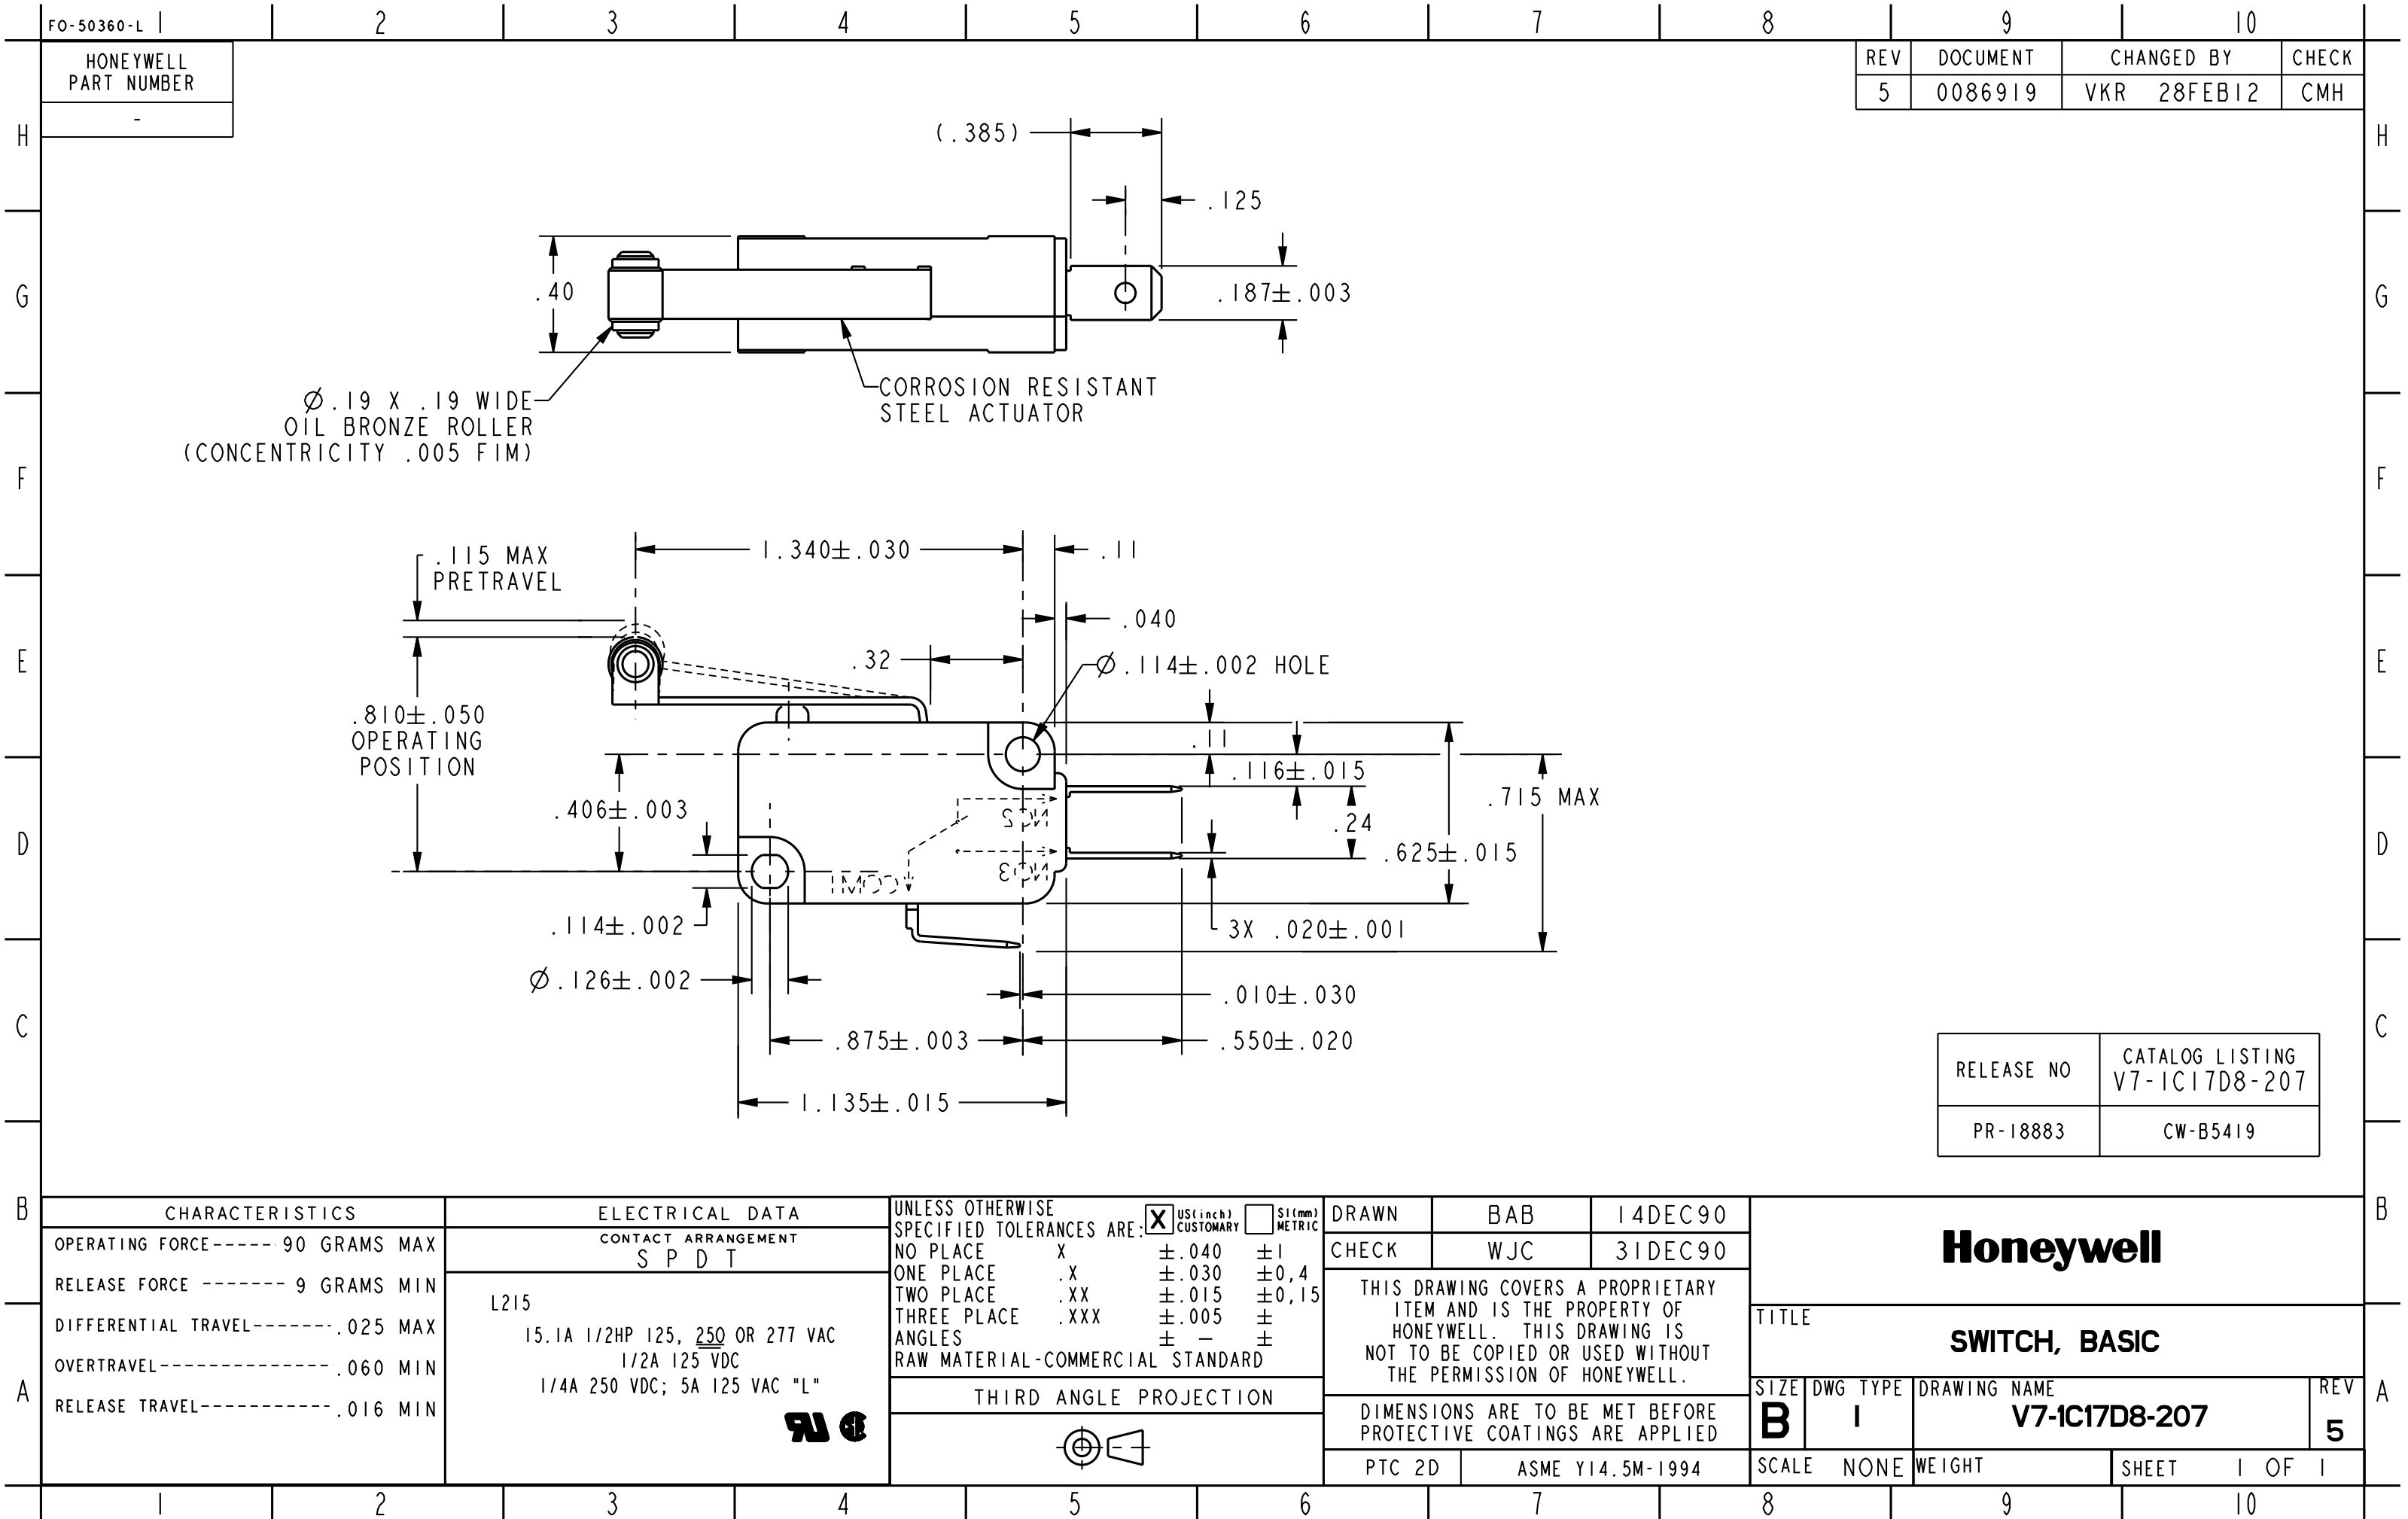

FO-50360-L

2

3

4

5

6

7

8

9


10

HONEYWELL
PART NUMBER

-

REV	DOCUMENT	CHANGED BY	CHECK
5	0086919	VKR 28FEB12	CMH

RELEASE NO	CATALOG LISTING
PR-18883	V7-1C17D8-207
	CW-B5419

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN	BAB	14DEC90	Honeywell								
OPERATING FORCE----- 90 GRAMS MAX		CONTACT ARRANGEMENT S P D T		NO PLACE X ±.040 ±1		CHECK	WJC	31DEC90									
RELEASE FORCE ----- 9 GRAMS MIN		L215 15.1A 1/2HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L" 		ONE PLACE .X ±.030 ±0.4		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, BASIC								
DIFFERENTIAL TRAVEL----- .025 MAX				TWO PLACE .XX ±.015 ±0.15													
OVERTRAVEL----- .060 MIN				THREE PLACE .XXX ±.005 ±		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED											
RELEASE TRAVEL----- .016 MIN				ANGLES ± — ±													
				RAW MATERIAL-COMMERCIAL STANDARD													
				THIRD ANGLE PROJECTION													
																	
						PTC 2D			ASME Y14.5M-1994			SCALE NONE		WEIGHT		SHEET 1 OF 1	