



HONEYWELL
PART NUMBER

-

REV	DOCUMENT	CHANGED BY		CHECK
4	0086919	VKR	28FEB12	CMH

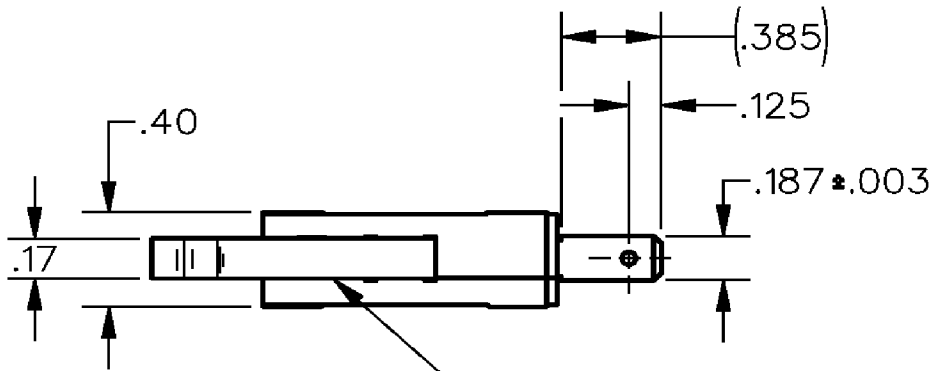

CORROSION RESISTANT
STEEL ACTUATOR

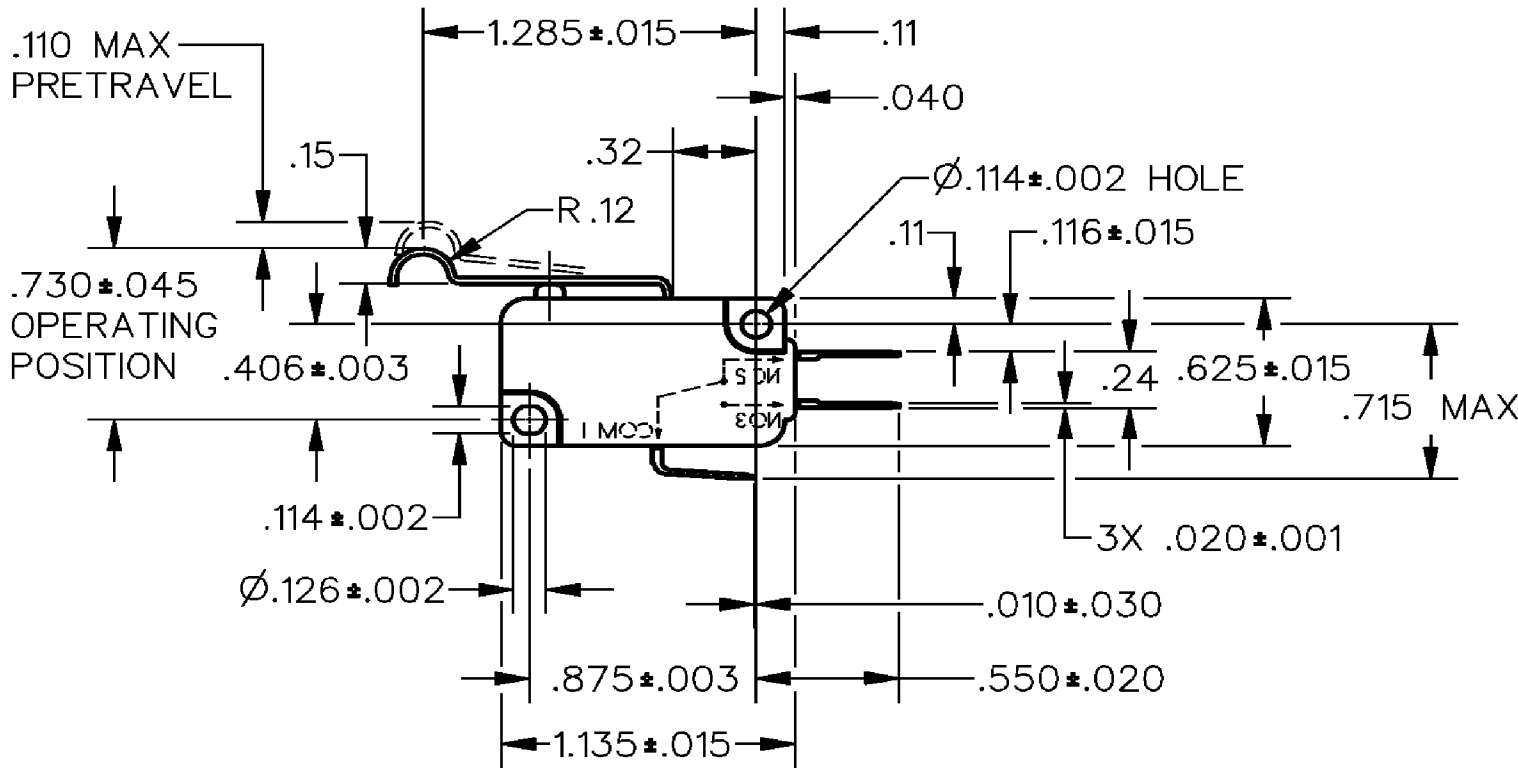

RELEASE NO	CATALOG LISTING
PR-19189	V7-1C17D8-263 CW-B1655

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	DCS	06JUN08		Honeywell			
OPERATING FORCE----- 91 GRAMS MAX		CONTACT ARRANGEMENT S P D T		TOLERANCES UNLESS NOTED:		CHECK	DAW	18JUN08					
RELEASE FORCE ----- 9 GRAMS MIN		L215 15.1A 1/2HP 125, 250 OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L" 		NO PLACE X ± —		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE DWG TYPE DRAWING NAME REV B I V7-1C17D8-263 4					
DIFFERENTIAL TRAVEL ----- .024 MAX				ONE PLACE .X ± .030									
OVERTRAVEL ----- .061 MIN				TWO PLACE .XX ± .015									
RELEASE TRAVEL ----- .015 MIN				THREE PLACE .XXX ± .005									
				FOUR PLACE .XXXX ± —									
				ANGLES ± —		RASTER		SCALE - WEIGHT		SHEET 1 OF 1			
				THIRD ANGLE PROJECTION									