


HONEYWELL PART NUMBER
V7-1C17D8-295
CWB1659

REV	DOCUMENT	CHANGED BY	CHECK
B	0041135	VS 26JUN08	BLR

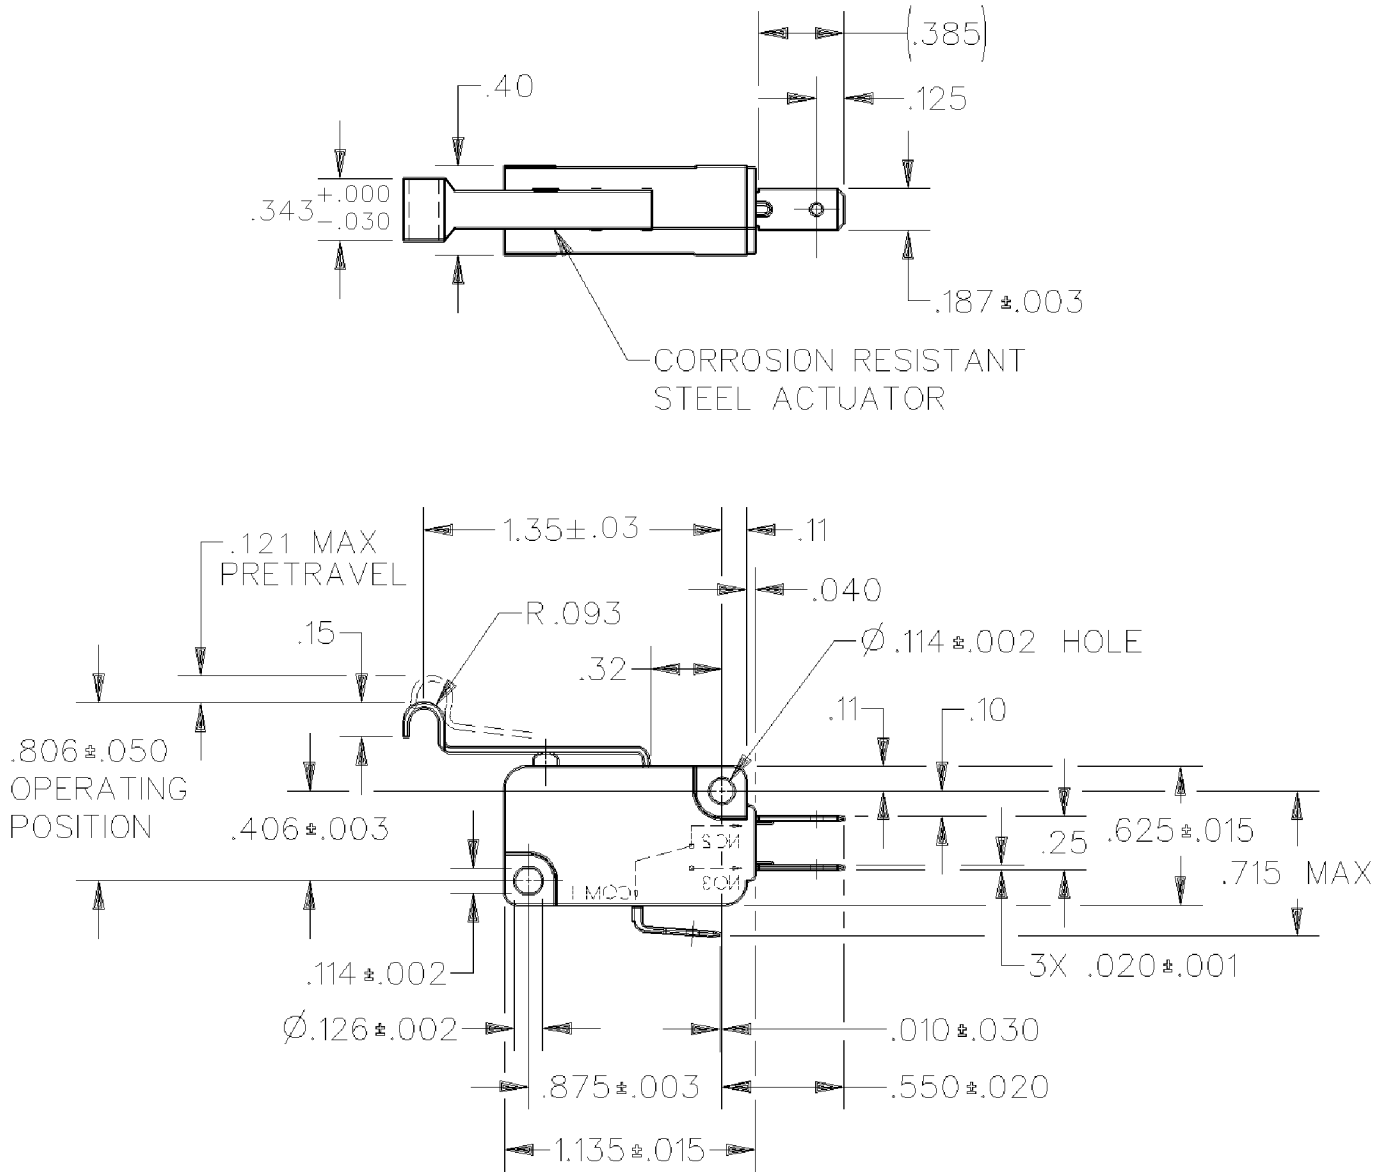

REPLACES : X116307-V7

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± — ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± — ANGLES ± — THIRD ANGLE PROJECTION 		DRAWN		DVM		23JUN05		Honeywell			
OPERATING FORCE— — —86 GRAMS MAX RELEASE FORCE— — —9 GRAMS MIN DIFFERENTIAL TRAVEL— — —.027 MAX OVERTRAVEL— — — — —.068 MIN RELEASE TRAVEL— — — — —.016 MIN		CONTACT ARRANGEMENT S P D T L215 15.1A 1/2HP 125, 250 OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L" 				CHECK		AK		23JUN05					
				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV	
										B	I	V7-1C17D8-295		B	
						RASTER				SCALE	-			SHEET 1 OF 1	