
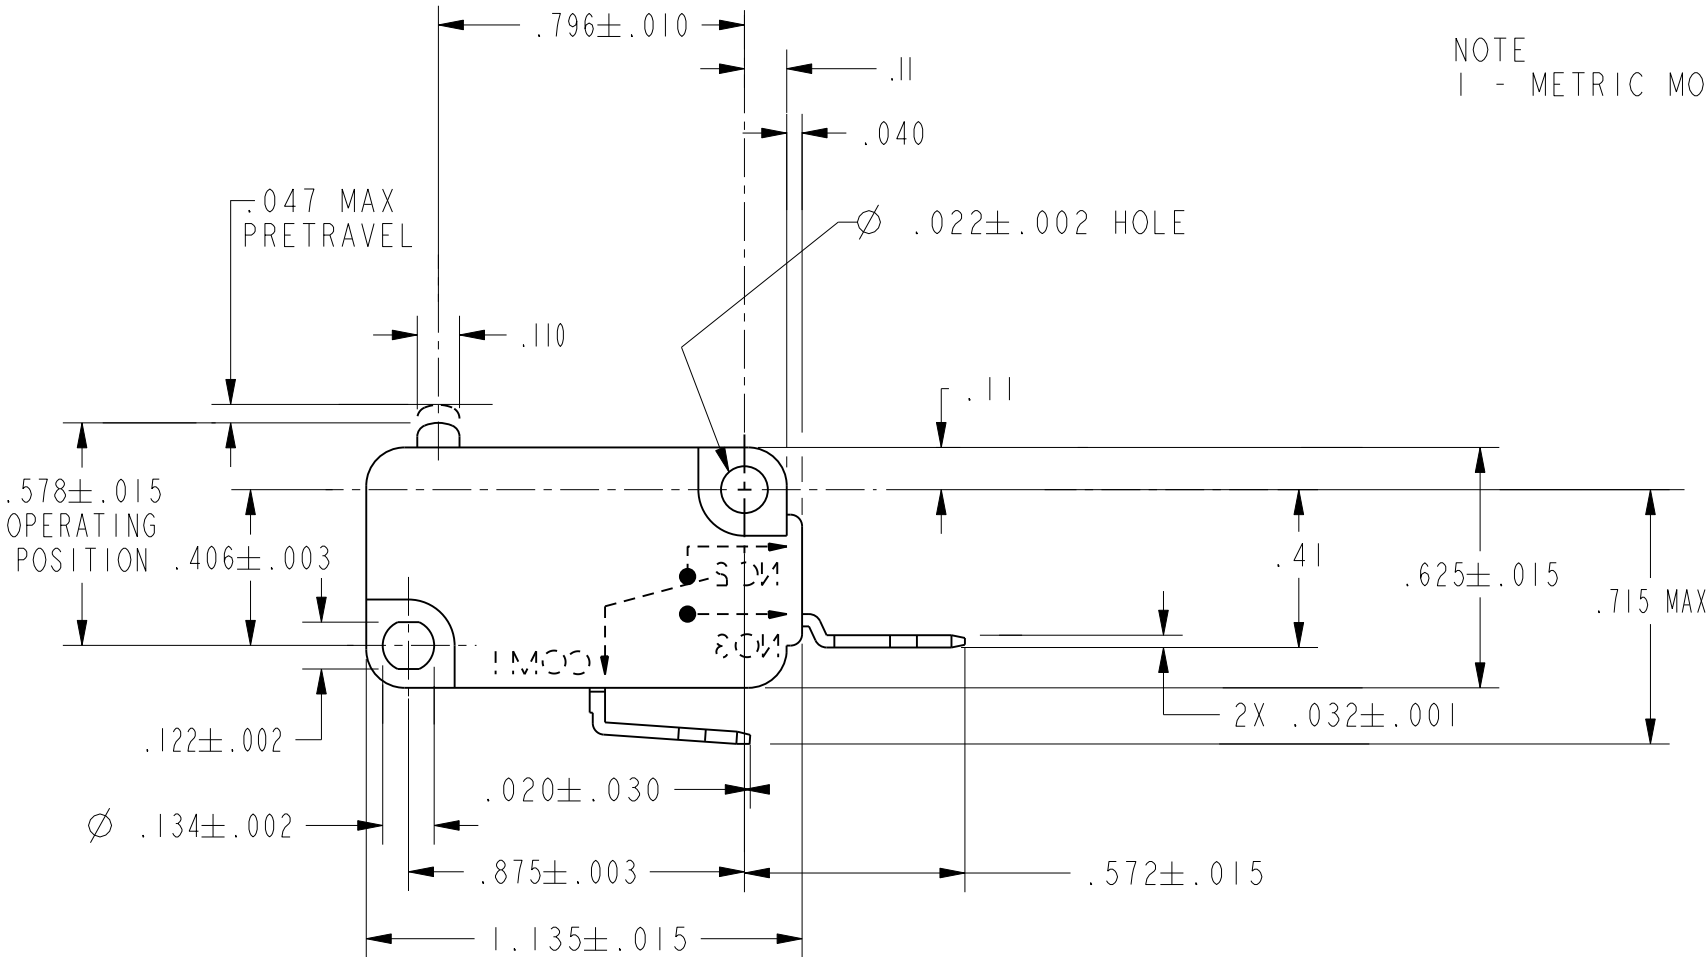


CW-B1759

REV	DOCUMENT	CHANGED BY	CHECK
2	0041144	SS 26 JUN08	BLR

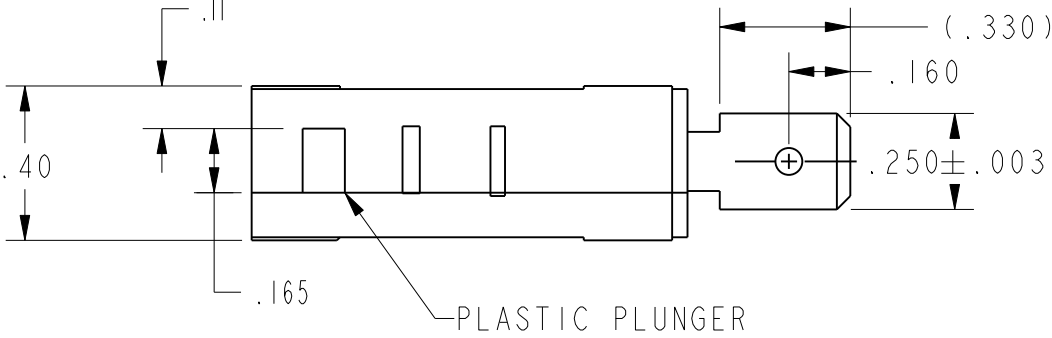

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			DRAWN	GJW	27APR00	Honeywell							
OPERATING FORCE----- 150 GRAMS MAX		CONTACT ARRANGEMENT S P N O		NO PLACE X ±.040 ±1			CHECK	SAV	27APR00								
RELEASE FORCE----- 25 GRAMS MIN		L215 15.1A 1/2HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L" 		ONE PLACE .X ±.030 ±0,4			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, BASIC							
DIFFERENTIAL TRAVEL----- .002-.010				TWO PLACE .XX ±.015 ±0,15													
OVERTRAVEL----- .050 MIN				THREE PLACE .XXX ±.005 ±			DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED										
FREE POSITION----- .625 MAX				ANGLES ± ±													
RELEASE TRAVEL----- .010 MIN				RAW MATERIAL-COMMERCIAL STANDARD			PTC 2D			ASME Y14.5M-1994		SCALE 2:1		WEIGHT		SHEET 1 OF 1	
				THIRD ANGLE PROJECTION 