

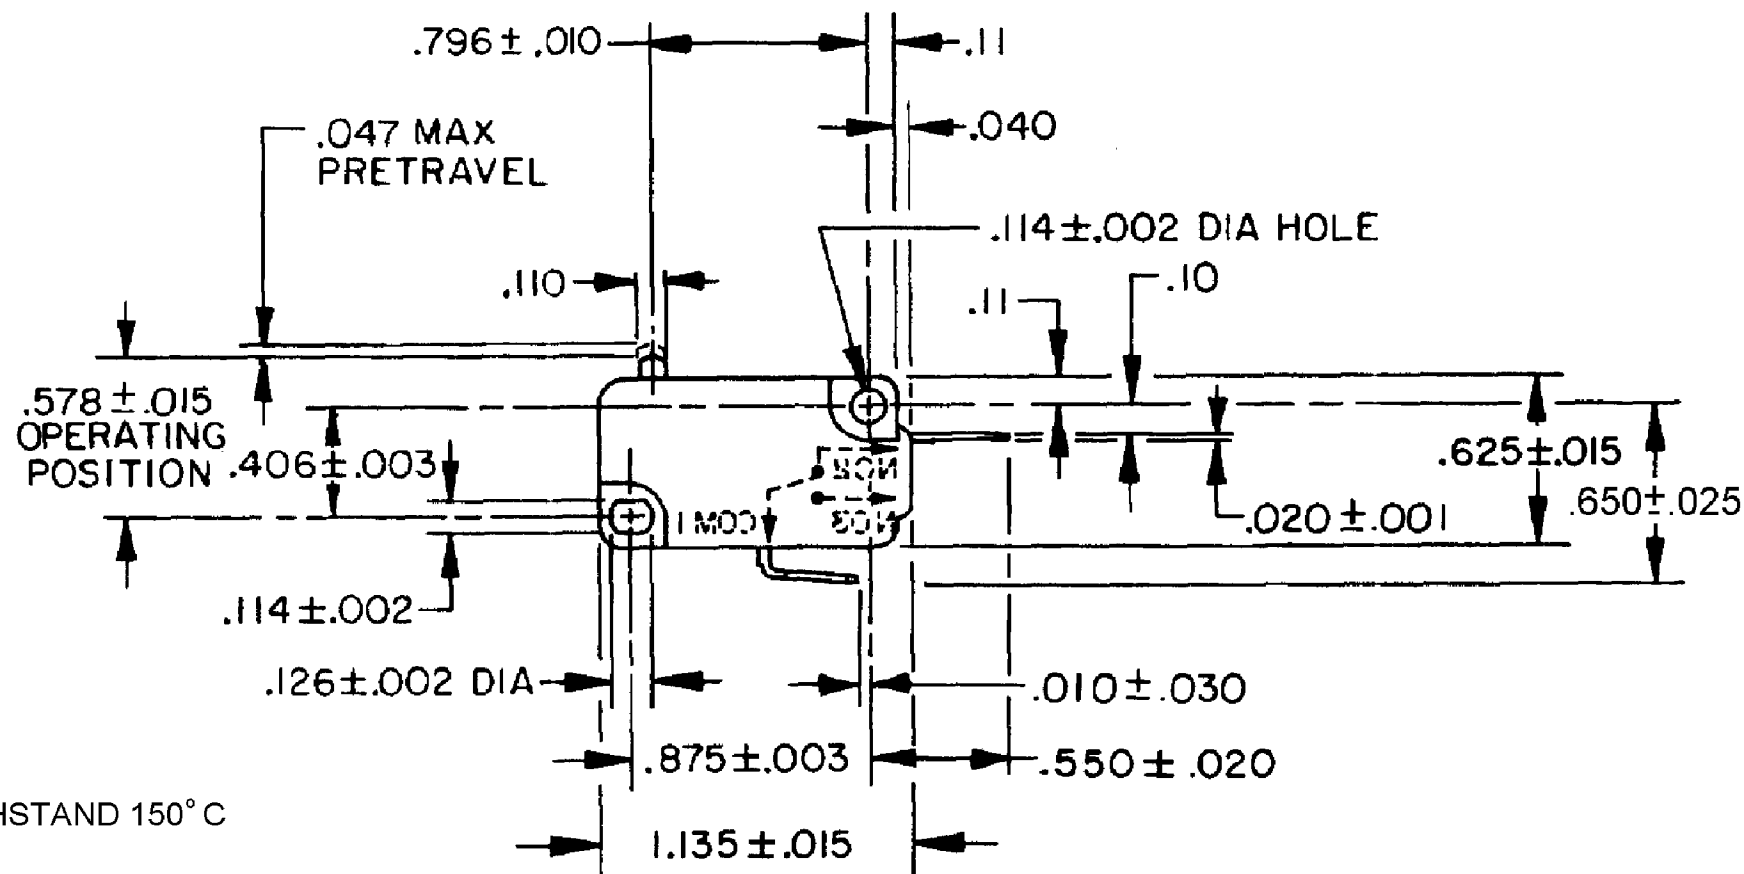



HONEYWELL
PART NUMBER

REV	DOCUMENT	CHANGED BY	CHECK
7	0041228	VS 03JUL08	BLR

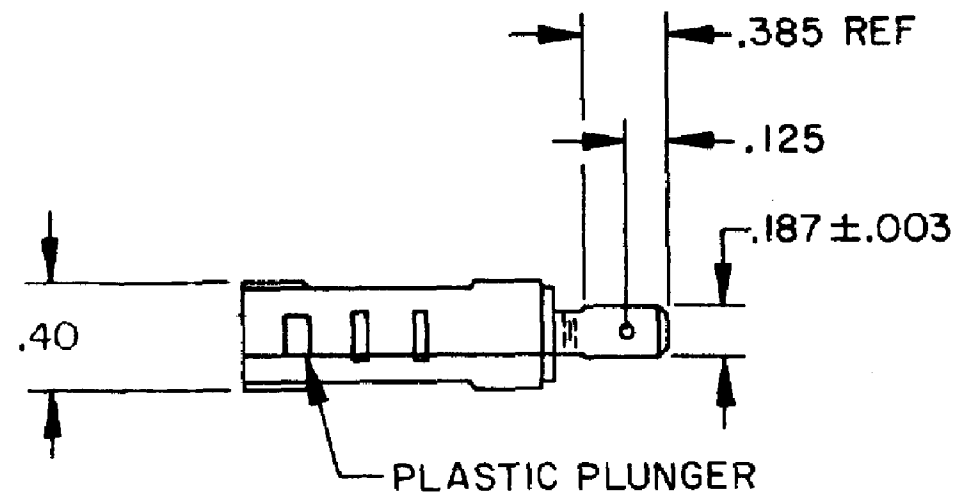

NOTE
1 - SWITCH MATERIALS WILL WITHSTAND 150° C

RELEASE NO PR-13539	CATALOG LISTING V7-IC33D8
REPLACES X80910-V7	CW-B5593

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN	JAS	05DEC84		Honeywell				
OPERATING FORCE----- 150 GRAMS MAX		CONTACT ARRANGEMENT S P N C		NO PLACE X ± - ± -		CHECK	CEC	06DEC84						
RELEASE FORCE ----- 25 GRAMS MIN		15.1A 1/2 HP 125, <u>250</u> , 277 VAC 1/2A 125VDC 1/4A 250VDC; 5A 125VAC "L"		ONE PLACE .X ± - ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH, BASIC				
DIFFERENTIAL TRAVEL ----- .002-.010				TWO PLACE .XX ± .016 ± 0.34										
OVERTRAVEL ----- .050 MIN				THREE PLACE .XXX ± .006 ± 0.13		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED								
RELEASE TRAVEL ----- .010 MIN				ANGLES ± - ± -										
						RAW MATERIAL-COMMERCIAL STANDARD								
				THIRD ANGLE PROJECTION		RASTER		ASME Y14.5M-1994		SIZE	DWG TYPE	DRAWING NAME		REV
		L215  								B	I	V7-IC33D8		7
										SCALE	NTS	WEIGHT		SHEET 1 OF 1