

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH-BASIC

CATALOG LISTING

V7-1S17D8-022

CW-B8645

CATALOG LISTING
V7-1S17D8-022
PAGE 1 OF 1

M

ISSUE
5

REPLACES
PR-18499

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

CHECK

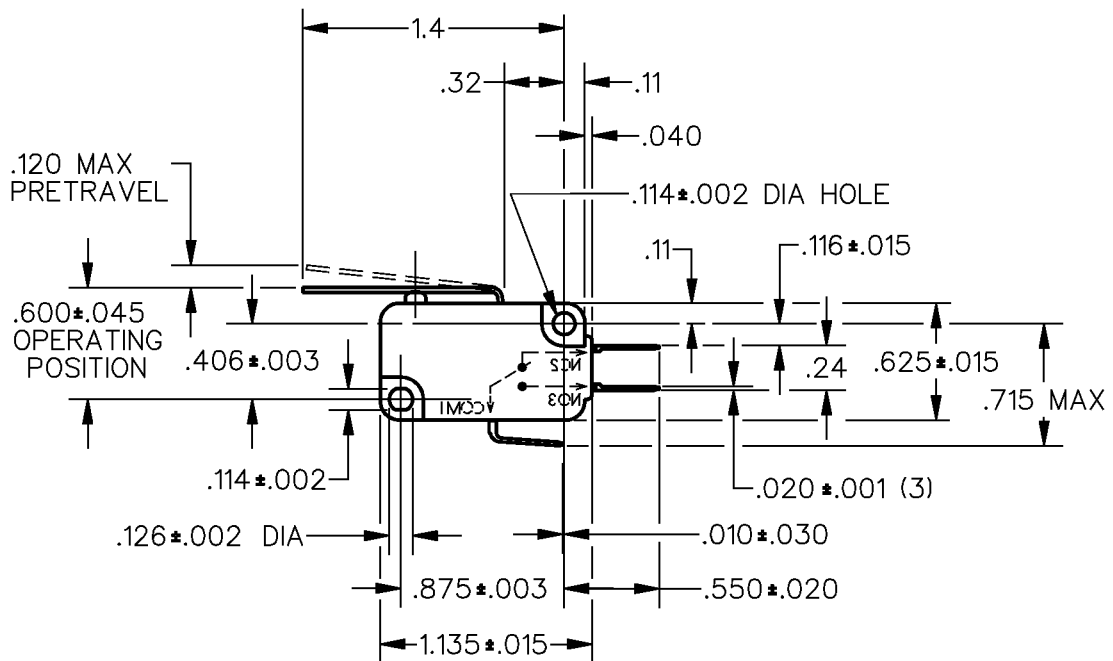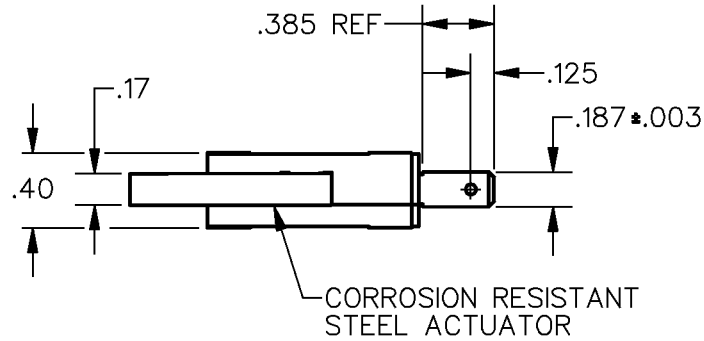


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE-----85 GRAM MAX
RELEASE FORCE -----8 GRAM MIN
DIFFERENTIAL TRAVEL-----.030 MAX
OVERTRAVEL-----.085 MIN
RELEASE TRAVEL -----.017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

0.1A 125 VAC L142



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

FORMTEK

DRAWN

W L S 13 AUG 90